

**ASBESTOS SURVEY
PROJECT RECORD**

**Point Dume Marine Science
Elementary School
6955 Fernhill Drive
Malibu, California 90265**

Prepared for:

**Santa Monica-Malibu
Unified School District
1651 6th Street
Santa Monica, California 90404**

Prepared by:

CTL Environmental Services
24404 South Vermont Avenue, Suite 307
Harbor City, California 90710
(310) 530-5006

May 13, 2008
CTL Project No. 107-0008

TABLE OF CONTENTS

EXECUTIVE SUMMARY

INVESTIGATION	1
METHODOLOGY	1
RESULTS	2
CONCLUSIONS AND RECOMMENDATIONS	5
ASSUMPTIONS AND LIMITATIONS	5

TABLES/APPENDICES

A. Material Inventory

- Summary of Bulk Sample Analysis
- Sample Identification
- Sample Description
- Estimated Quantities

B. Laboratory Analysis Report

C. Sample Locations

D. CTL Employee Certifications

EXECUTIVE SUMMARY



CTL Environmental Services

24404 South Vermont Avenue, Suite 307 • Harbor City, CA 90710 • TEL: (310) 530-5006 • FAX: (310) 530-0792

REPORTED: May 13, 2008

CTL PROJECT NO.: 107-0008

CLIENT: Santa Monica-Malibu
Unified School District
1651 6th Street
Santa Monica, California 90404

ATTENTION: Mr. Wally Berriman

REF: Asbestos Survey
Point Dume Marine Science Elementary School
6955 Fernhill Drive
Malibu, California 90265

INVESTIGATION

On April 14, 2008, April 15, 2008 and May 16, 2008 CTL Environmental Services (CTL) conducted an investigation for the presence of asbestos-containing materials (ACMs) at Point Dume Science Elementary School, located at 6955 Fernhill Drive, Malibu, California. The survey included the following:

- (a) An initial investigation to locate suspect ACMs
- (b) Physical assessment of suspect materials
- (c) The collection of bulk samples from suspect materials
- (d) Laboratory analysis of all collected samples

Santa Monica-Malibu School District located in Santa Monica, California, retained CTL for this investigation. Fabian Ruvalcaba, a Cal-OSHA Certified Site Surveillance Technician and EPA-accredited Building Inspector employed by CTL, conducted the sampling.

METHODOLOGY

The sampling was conducted using guidelines set forth in Federal Register *40 CFR Part 763*.

Based on the requirements of the United States Environmental Protection Agency (USEPA) as set forth in *40 CFR 763*, a homogeneous area is defined as "an area of surfacing material, thermal system insulation material or miscellaneous material that is uniform in color and texture". Furthermore, the regulation requires that a minimum number of samples be collected from each identified homogeneous area. If one sample in a homogeneous area is found to contain asbestos, the entire homogeneous area is considered to be asbestos-containing.

It is possible that one sample out of a set of samples collected from a homogeneous area can be positive for asbestos and the remaining samples in the homogeneous area are negative. However, the entire area must be considered as asbestos-containing.

Caution is advised in interpreting results provided herein.

Bulk samples collected from the subject site were subsequently analyzed by Polarized Light Microscopy (PLM) for asbestos content in accordance with the United States Environmental Protection Agency (EPA) *Determination of Asbestos in Bulk Building Materials: EPA/600/R-93/116, July 1993*, at AmeriSci Los Angeles, a NVLAP-accredited laboratory located in Carson, California.

RESULTS

The following materials were found to be asbestos-containing.

Building A (Main Office)

Material	Sample No.	Material Location	Asbestos Content
12"x12" beige speckled floor tile with adhesive with residual adhesive	3424	PTA office A, resource room	None Detected (tile) None Detected (yellow mastic) 4% Chrysotile (black mastic)
9" beige with white streaks floor tile with mastic	3425	PTA office B	4% Chrysotile (tan floor tile) 5% Chrysotile (black mastic)
12"x12" green speckled floor tile with adhesive and black residual mastic	3426	Main office, principal's office (including under carpeting), file room, storage room, hallway A, B, work room, copy room, nurse's office, nurse's office A, lounge	None Detected (green floor tile) None Detected (yellow mastic) 4% Chrysotile (black mastic)
Chalk boards	N/A	K 1, K 2, room 1, room 2, resource room	Assumed
Chalk boards mastic	N/A	K 1, K 2, room 1, room 2, resource room	Assumed
Light brown speckled floor tile with mastic (under carpet and floor tile) *Residual floor mastic was observed under carpet in principal's office	3435-3436	Under carpet and floor tile, rooms K 1, K 2, room 1, room 2, K 2B	None Detected (brown floor tile) None Detected (yellow mastic) 3% Chrysotile (black mastic) 4% Chrysotile (tan floor tile) 5% Chrysotile (black mastic)
Barrier paper under stucco	N/A	Exterior walls under stucco	Assumed

Building B (Library)

Material	Sample No.	Material Location	Asbestos Content
Barrier paper (under stucco)	N/A	Exterior walls under stucco	Assumed
Cork board mastic	N/A	Text book room	Assumed
Chalk boards	N/A	Text book room	Assumed
9"x9" beige floor tile with white mastic	3451	Office, under carpet	7% Chrysotile (flooring) 2% Chrysotile (mastic) 2% Anthophyllite (mastic)
4" diameter pipe elbows on fiberglass T.S.I	3452	Mezzanine, HVAC room	10% Chrysotile

Building C (Auditorium)

Material	Sample No.	Material Location	Asbestos Content
Smooth plaster	3454	All restrooms, auditorium, kitchen, vestibule, room 19, room C1, C2, 82, stage area	<1% Chrysotile
Sand plaster	3455	Room U	<1% Chrysotile
9"x9" beige with white streaks floor tile with mastic	3458	Room 19, room C1, 82, vestibule	6% Chrysotile (flooring) 2% Chrysotile (mastic) 2% Anthophyllite (mastic)
12"x12" beige with dark brown speckled floor tile with adhesive	3459	Auditorium	None Detected (flooring) 2% Chrysotile (mastic)
Brown pebbled pattern sheet vinyl flooring	3460	Kitchen	10% Chrysotile (flooring) None Detected (mastic)
12"x12" grey speckled floor tile with adhesive	3461	Kitchen restroom	None Detected (flooring) 3% Chrysotile (mastic)
12"x12" wood pattern floor tile with mastic	3462	Room 19 (patch)	None Detected (flooring) 3% Chrysotile (mastic)
Barrier paper (under stucco)	N/A	Exterior walls under stucco	Assumed

Building D (Rooms 10-12)

Material	Sample No.	Material Location	Asbestos Content
12"x12" green speckled floor tile with adhesive	3476	Room 10, 11, 10A	None Detected (tile) 3% Chrysotile (mastic)
Beige floor tile with mastic (under carpet)	3479	Room 10B (under carpet) room 12 under carpet and floor tile	7% Chrysotile (flooring) 4% Chrysotile (mastic)
Barrier paper	N/A	Exterior walls under stucco	Assumed
Chalk boards	N/A	Rooms 11 & 12	Assumed
Cork board mastic	N/A	Rooms 11 & 12	Assumed
9"x9" beige with white streaks floor tile with mastic	3458	Room 10 (perimeter patches), room 10 C	6% Chrysotile (beige flooring) 4% Chrysotile (black mastic)

Building E (Rooms 13-15)

Material	Sample No.	Material Location	Asbestos Content
Chalk boards	N/A	Rooms 13, 14, 15	Assumed
Cork board mastic	N/A	Rooms 13, 14, 15	Assumed
Beige floor tile mastic (under carpet)	3498	Rooms 13, 14, 15 (under floor tile and carpet)	3% Chrysotile (floor tile) 5% Chrysotile (mastic)
Barrier paper (under stucco)	N/A	Exterior walls (under stucco)	Assumed
9"x9" beige with white streaks floor tile with mastic	3458	Room 10 (penetration patches), room 10 C	6% Chrysotile (beige flooring) 4% Chrysotile (black mastic)

Building F (Rooms 16-18)

Material	Sample No.	Material Location	Asbestos Content
Stucco	3485	Exterior walls	<1% Chrysotile
Chalk boards	N/A	Rooms 16, 17, 18	Assumed
Cork board mastic	N/A	Rooms 16, 17, 18	Assumed

Building G (Rooms 3-6)

Material	Sample No.	Material Location	Asbestos Content
Beige floor tile with mastic (under carpet)	3479	Room 10B (under carpet) room 12 under carpet and floor tile	7% Chrysotile (flooring) 4% Chrysotile (mastic)
Stucco	3483	Exterior walls	<1% Chrysotile
Chalk boards	N/A	Rooms 3, 4, 5, 6	Assumed
Corkboard mastic	N/A	Rooms 3, 4, 5, 6	Assumed
Barrier paper (under stucco)	N/A	Exterior walls under stucco	Assumed

Building H (Room 7-9)

Material	Sample No.	Material Location	Asbestos Content
Cork board mastic	N/A	Room 7, 8, 9	Assumed
Chalkboards	N/A	Room 7, 8, 9	Assumed

Restroom Building

Material	Sample No.	Material Location	Asbestos Content
4" diameter pipe insulation	3493	Room 81	8% Chrysotile

The results for all other materials sampled were reported as "None Detected" based upon the limitations of the analytical method. Please refer to the attached Material Inventory for a complete listing of materials sampled, locations and material conditions.

If any materials are found to contain greater than one-tenth of one percent of asbestos by weight as determined by Polarized Light Microscopy (PLM) method of analysis, Cal-OSHA mandates that the material(s) be treated as an asbestos-containing construction material (ACCM) and are subject to regulation under *CCR Title 8, Section 1529*.

If any materials are found to contain more than one percent asbestos by weight as determined by Polarized Light Microscopy (PLM) method of analysis, U.S. EPA mandates that the material(s) be treated as asbestos-containing materials (ACM) and are subject to regulation under *40 CFR 61*.

All repair and/or removal work and subsequent disposal should be performed by a licensed asbestos abatement contractor prior to any disturbance of any materials determined to contain asbestos.

For the ACMs identified in this report, dry sawing, sanding or drilling should be avoided. Additional suspect materials may be exposed during demolition and/or renovation activities; such materials should be sampled and analyzed prior to further disturbance.

CONCLUSIONS AND RECOMMENDATIONS

Any damaged asbestos materials should be removed, repaired, encapsulated or enclosed. The EPA also recommends that all asbestos materials be removed prior to any renovation or demolition activities that may impact the material. The EPA recommends a pro-active, in-place management program be put in place whenever asbestos is discovered in a building. Asbestos materials that are not damaged may be managed in place with a good operations and maintenance program.

ASSUMPTIONS AND LIMITATIONS

This report has been prepared for the exclusive use of Santa Monica-Malibu Unified School District. In performing our professional services, we have applied present engineering and scientific judgment and used a level of effort consistent with the standard of practice measured on the date of work in the locale of the project site for similar type studies.

CTL has relied in good faith upon representations and information furnished by individuals with respect to operations and existing property conditions to the extent that they have not been contradicted by data obtained from other sources. Accordingly, CTL accepts no responsibility for any deficiencies, omissions, misrepresentations or fraudulent acts of persons interviewed. In addition, CTL will not accept liability for any loss, injury, claim or damage arising directly or indirectly from any use or reliance on this report. CTL makes no warranty, expressed or implied.

Material quantities are in some cases listed within this document. These quantities are not intended to be used for removal bidding purposes. Nor is this document intended as a contract manual. Work methods and sequence, coordination of participants, applicable codes, engineering controls, required submittals and notifications should in all cases be addressed in a separate and independent bidding and contract document.

If you have any questions, please feel free to contact the undersigned at (310) 530-5006. We appreciate the opportunity to be of service to Santa Monica Unified School District.

Respectfully submitted by,
CTL Environmental Services




Fabian Ruvalcaba, CSST
Cal-OSHA Cert. #06-4088

Reviewed by,
CTL Environmental Services



Marie Tullai, CIH
Director, Workplace Health & Safety
Certified Asbestos Consultant
Cal-OSHA Cert. #92-0218

MT/ebj



APPENDIX A

MATERIAL INVENTORY:

**SUMMARY OF BULK SAMPLE ANALYSIS
SAMPLE IDENTIFICATION
SAMPLE DESCRIPTION
ESTIMATED QUANTITIES**

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu United School District
 PROJECT NO: 107-0008
 PROJECT NAME: Point Dume
 Building A (Main Office)

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Friable	Damage
Stucco	3419	None Detected	Exterior work room, northwest corner	Exterior walls and overhangs	2,500 sq. ft.	No	No
Smooth plaster	3420	None Detected	Room K1, southeast corner at electrical (switch)	Rooms K 1, K 2, K 1 restrooms, K 2 restrooms, PTA office A & B, resource office, main office, principal's office, K1 all restrooms, file room, storage room, hallway A, work room, copy room, nurse's office, nurse's office A, hallway B, lounge, room 1, room 2	7,200 sq. ft.	No	No
Sand plaster	3421	None Detected	Hallway B, northeast corner	Hallway B	150 sq. ft.	No	No
12"x12" micro-perforated ceiling tile	3422	None Detected	Room 2, 10 feet east and 5 feet south of northwest corner	K 1, K 2, PTA office A, B, resource, main office, principal's office, hallway A work room, nurse's office, nurse's office A, hallway B, lounge, room 1, room 2	5,000 sq. ft.	No	No
12"x12" blue speckled floor tile with adhesive	3423	None Detected	Room K2, 5 feet north and 5 feet west of southeast corner	K1, K2, room 1, room 2	1,700 sq. ft.	No	No
12"x12" beige speckled floor tile with adhesive with residual mastic	3424	None Detected (tile) None Detected (yellow mastic) 4% Chrysotile (black mastic)	Resource room, southeast corner	PTA office A, resource room	250 sq. ft.	No	No
9" beige with white streaks floor tile with mastic	3425	4% Chrysotile (tan floor tile) 5% Chrysotile (black mastic)	PTA office B, southeast corner	PTA office B	100 sq. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu United School District
PROJECT NO: 107-0008
PROJECT NAME: Point Dume
Building A (Main Office)

Page 2 of 5

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Friable	Damage
12"x12" green speckled floor tile with adhesive and black residual mastic*	3426	None Detected (green floor tile) None Detected (yellow mastic) 4% Chrysotile (black mastic)	File room, northeast corner	Main office, principals office including under carpeting, file room, storage room, hallway A, B, work room, copy room, nurse's office, nurse's office A, lounge	2,500 sq. ft.	No	No
Blue multi colored carpet glue	3427	None Detected	Room K2, 5 feet north and 5 feet west of southeast	K 1, K 2, room 1, room 2	1,900 sq. ft.	No	No
4" black covebase with adhesive	3429	None Detected	K 1, southeast corner	K 1, K 2, Room 1, room 2	500 ln. ft.	No	No
4" turquoise covebase with adhesive	3430	None Detected	Room K 1, north center by restroom 1	K 1, K 2	120 ln. ft.	No	No
4" grey covebase with adhesive	3431	None Detected	Resource room, southeast corner	Resource room, PTA office A	50 ln. ft.	No	No
4" beige covebase with adhesive	3432	None Detected	PTA office B, southeast corner	PTA office B, principal's office	20 ln. ft.	No	No
4" green covebase with adhesive	3433	None Detected	File room, northeast corner	File room, main office, storage room, hallway A, B, work room, copy room, nurse's office, nurse's office A, lounge	300 ln. ft.	No	No
4" blue covebase with adhesive	3434	None Detected	Lounge, northwest corner	Lounge	10 ln. ft.	No	No
Chalk boards	N/A	Assumed	Not sampled, none destructive sampling	K 1, K 2, room 1, room 2, resource room	50 sq. ft.	No	No
Chalk boards mastic	N/A	Assumed	Not sampled, none destructive sampling	K 1, K 2, room 1, room 2, resource room	50 sq. ft.	No	No
Light brown speckled floor tile with mastic (under carpet and floor tile)	3435	None Detected (brown floor tile) None Detected (yellow mastic) 3% Chrysotile (black mastic)	Room K2, 5 feet north and 5 feet west of southeast	Under carpet and floor tile, rooms K 1, K 2, room 1, room 2, K 2B	3,600 sq. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu United School District
PROJECT NO: 107-0008
PROJECT NAME: Point Dume
Building A (Main Office)

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Friable	Damage
Light brown speckled floor tile with mastic (under carpet and floor tile)	3436	4% Chrysotile (tan floor tile) 5% Chrysotile (black mastic)	Room K 1, 5 feet south and 5 feet west of northeast	Under carpet and floor tile, rooms K 1, K 2, room 1, room 2, K 2B	3,600 sq. ft.	No	No
Acoustical plaster ceiling**	3494	None Detected	Room 2, 10 feet east and 5 feet south at northwest corner	K 1, K 2, PTA office A, B, resource, main office, principal's office, hallway A work room, nurse's office, nurse's office A, hallway B, lounge, room 1, room 2 (above 12"x12" micro-perforated ceiling tile)	5,000 sq. ft.	No	No
Ceiling tile mastic**	3495	None Detected	Room 2, 10 feet east and 5 feet south at northwest corner	K 1, K 2, PTA office A, B, resource, main office, principal's office, hallway A work room, nurse's office, nurse's office A, hallway B, lounge, room 1, room 2 (above 12"x12" micro-perforated ceiling tile)	5,000 sq. ft.	No	No
Stucco	3496	None Detected	Exterior storage shed, southwest corner	Exterior storage shed, exterior	300 sq. ft.	No	No
Smooth plaster	3497	None Detected	Exterior storage shed, interior northwest corner	Exterior storage shed, interior wall and ceiling	300 sq. ft.	No	No
Barrier paper under stucco	N/A	Assumed	Not sampled, material intact	Exterior walls under stucco	2,500 sq. ft.	No	No
Acoustical plaster ceiling	3823	None Detected	Room K1, 9 feet south of northwest corner	Building A, "Administration Building" room K1, K2, PTA office A& B, resource, main office, principals office, hallway A, work room, nurse's office, nurse's office A, hallway B, lounge, room 1, room 2	5,000 sq. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu United School District
 PROJECT NO: 107-0008
 PROJECT NAME: Point Dume
 Building A (Main Office)

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Friable	Damage
Acoustical plaster ceiling	3824	None Detected	Room 2, 8 feet south and 2 feet west of northeast corner	Building A, "Administration Building" room K1, K2, PTA office A& B, resource, main office, principals office, hallway A, work room, nurse's office, nurse's office A, hallway B, lounge, room 1, room 2	5,000 sq. ft.	No	No
Acoustical plaster ceiling	3825	None Detected	Room K2, 4 feet north and 15 feet west of southeast corner	Building A, "Administration Building" room K1, K2, PTA office A& B, resource, main office, principals office, hallway A, work room, nurse's office, nurse's office A, hallway B, lounge, room 1, room 2	5,000 sq. ft.	No	No
Acoustical plaster ceiling	3826	None Detected	Room 2, 10 feet west and 10 feet north of southeast corner	Building A, "Administration Building" room K1, K2, PTA office A& B, resource, main office, principals office, hallway A, work room, nurse's office, nurse's office A, hallway B, lounge, room 1, room 2	5,000 sq. ft.	No	No
Acoustical plaster ceiling	3827	None Detected	Room 2, 10 feet east and 10 feet north of southwest corner	Building A, "Administration Building" room K1, K2, PTA office A& B, resource, main office, principals office, hallway A, work room, nurse's office, nurse's office A, hallway B, lounge, room 1, room 2	5,000 sq. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu United School District
PROJECT NO: 107-0008
PROJECT NAME: Point Dume
Building A (Main Office)

Page 5 of 5

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Friable	Damage
Acoustical plaster ceiling	3828	None Detected	Room K1, 10 feet north and 12 feet east of southwest	Building A, "Administration Building" room K1, K2, PTA office A& B, resource, main office, principals office, hallway A, work room, nurse's office, nurse's office A, hallway B, lounge, room 1, room 2	5,000 sq. ft.	No	No

Notes:

Exterior walls consist of wood siding. This area was inaccessible for inspection

* ACM black mastic remains under carpet in principal's office

**Material is intact; limited sampling conducted in order to prevent damage

Interior walls consist of sections at fiberboard panels over plaster. This area was inaccessible for inspection

All materials assumed ACM or inaccessible for sampling should be sampled prior to disturbance

Window frames are metal, no putty was observed



CTL Environmental Services

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu United School District
PROJECT NO: 107-0008
PROJECT NAME: Point Dume
Building B (Library)

Page 1 of 2

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Friable	Damage
Stucco	3437	None Detected	Exterior library, northeast corner	Exterior walls	2,200 sq. ft.	No	No
Smooth plaster	3438	None Detected	Speech room, northwest corner	Library, text book room, speech room, office, mezzanine, HVAC room	3,500 sq. ft.	No	No
12"x12" micro-perforated ceiling tile	3439	None Detected	Library office, center	Library, office, text book room, speech room	2,000 sq. ft.	Yes	No
12"x12" blue speckled floor tile with adhesive	3440	None Detected	Library, 15 feet north of southeast corner	Library	50 sq. ft.	No	No
12"x12" green speckled floor tile with adhesive	3441	None Detected	Text book room, south center	Text book room	100 sq. ft.	No	No
Blue multi colored carpet glue	3442	None Detected	Library, 15 feet north of southeast corner	Library, office	1,500 sq. ft.	No	No
4" black covebase with adhesive	3443	None Detected	Library office, south center	Office	10 ln ft.	No	No
4" green covebase with adhesive	3445	None Detected	Text book room, south center	Text book room	20 ln ft.	No	No
6" black covebase with adhesive	3446	None Detected	Library, northeast corner	Library, office	200 ln ft.	No	No
Barrier paper (under stucco)	N/A	Assumed	Not sampled, material intact	Exterior walls under stucco	2,200 sq. ft.	No	No
4" beige covebase with adhesive	3447	None Detected	Speech room, southwest corner	Speech room	30 ln ft.	No	No
Cork-board mastic	N/A	Assumed	Not sampled, material intact	Text book room	10 sq. ft.	No	No
Chalk boards	N/A	Assumed	Not sampled, material intact	Text book room	10 sq. ft.	No	No
Sand plaster	3448	None Detected	Mezzanine, HVAC room, north wall center	Mezzanine, HVAC room	200 sq. ft.	No	No
Vibrator reducer	3449	None Detected	Mezzanine, HVAC room, HVAC unit center	Mezzanine, HVAC room	10 sq. ft.	No	No
Duct sealant	3450	None Detected	Mezzanine, HVAC room, HVAC unit center	Mezzanine, HVAC room	10 sq. ft.	No	No
9"x9" beige floor tile with white mastic	3451	7% Chrysotile (flooring) 2% Chrysotile (mastic) 2% Anthophyllite (mastic)	Library office, northeast corner	Office, under carpet	120 sq. ft.	No	No
4" diameter pipe elbows on fiberglass T.S.I.	3452	10% Chrysotile	Mezzanine, HVAC room, west center	Mezzanine, HVAC room	2 elbows	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu United School District
PROJECT NO: 107-0008
PROJECT NAME: Point Dume
Building B (Library)

Page 2 of 2

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Friable	Damage
Acoustical plaster ceiling	Same as # 3494	None Detected	Previously sampled, building A	Above ceiling tile, in library, office, text book room , speech room	2000 sq. ft.	No	No
Ceiling tile mastic	Same as # 3495	None Detected	Previously sampled, building A	Above ceiling tile, in library, office, text book room , speech room	2,000 sq. ft.	No	No
Acoustical plaster ceiling	3829	None Detected	Library- Speech Room southwest corner	Building B- library office, text book room, speech room	2,000 sq. ft.	No	No

Note:

Windows consists of metal framing, no putty was observed

All materials assumed ACM or inaccessible for sampling should be sampled prior to disturbance.



CTL Environmental Services

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
 PROJECT NO: 107-0008
 PROJECT NAME: Point Dume
 Building C (Auditorium)

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Friable	Damage
Stucco	3453	None Detected	Exterior kitchen, northwest corner	Exterior walls	3,000 sq. ft.	No	No
Smooth plaster	3454	<1% Chrysotile	Room C1, northwest corner	All restrooms, auditorium kitchen, vestibule, room 19, room C1, C2, 82, stage area	5,000 sq. ft.	No	No
Sand plaster	3455	<1% Chrysotile	Room U, north wall center	Room U	100 sq. ft.	No	No
12" x 12" micro-perforated ceiling tile	3456	None Detected	Auditorium, stage area center	Auditorium, stage area, room 19	1,700 sq. ft.	Yes	No
12" x 12" blue speckled floor tile with adhesive	3457	None Detected	Auditorium, stage area, southeast corner	Stage area	300 sq. ft.	No	No
9" x 9" beige with white streaks floor tile with mastic	3458	6% Chrysotile (flooring) 2% Chrysotile (mastic) 2% Anthophyllite (mastic)	Room C1, southeast corner	Room 19, room C1, 82, vestibule	300 sq. ft.	No	No
12" x 12" beige with dark brown speckled floor tile with adhesive	3459	None Detected (flooring) 2% Chrysotile (mastic)	Auditorium, northeast by stage area	Auditorium	1,000 sq. ft.	No	No
Brown pebble pattern sheet vinyl flooring	3460	10% Chrysotile (flooring) None Detected (mastic)	Kitchen, 12 feet north of southwest corner	Kitchen	400 sq. ft.	No	No
12" x 12" grey speckled floor tile with adhesive	3461	None Detected (flooring) 3% Chrysotile (mastic)	Kitchen restroom, northwest corner	Kitchen restroom	20 sq. ft.	No	No
12" x 12" wood pattern floor tile with mastic	3462	None Detected (flooring) 3% Chrysotile (mastic)	Room 19, north center	Room 19 (patch)	20 sq. ft.	No	No
4" turquoise covebase with adhesive	3463	None Detected	Auditorium stage area, southeast corner	Stage area	40 in. ft.	No	No
4" grey covebase with adhesive	3464	None Detected	Kitchen restroom, northwest corner	Kitchen restroom	5 in. ft.	No	No
4" beige covebase with adhesive	3465	None Detected (basecove) 2% Anthophyllite (mastic)	Room C1, southeast corner	Room C1, 82, vestibule	50 in. ft.	No	No
4" brown covebase with adhesive	3466	None Detected	Auditorium, northwest corner	Auditorium	120 in. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu United School District
 PROJECT NO: 107-0008
 PROJECT NAME: Point Dume
 Building C (Auditorium)

Page 2 of 2

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Friable	Damage
2'x4' fissured ceiling panels	3467	None Detected	Room 19, center	Room 19	150 sq. ft.	No	No
Door insulation (encased in wood)	3468	10% Chrysotile 5% Amosite	Room 19, northwest exit doors	Room 19 (north west exit doors)	2 doors	No	No
Acoustical plaster	Same as # 3494	None Detected	Previously sampled, building A	Auditorium, stage area, room 19 (above 12"x12" micro-perforated ceiling tile)	1,200 sq. ft.	No	No
Ceiling tile mastic	Same as # 3495	None Detected	Previously sampled, building A	No putty observed in ceiling space, elbows were not accessible	1,200 sq. ft.	No	No
Barrier paper (under stucco)	N/A	Assumed	Not sampled, material intact	Exterior walls under stucco	3,000 sq. ft.	No	No
Acoustical plaster ceiling	3830	None Detected	Cafeteria, northeast corner	Cafeteria/auditorium, auditorium, stage area, room 19	1,700 sq. ft.	No	No

Note:

Windows consist of metal framing. No was putty observed.
 Fiberglass insulation was observed in ceiling space, elbows were not accessible for assessment by touch.
 All materials assumed ACM or inaccessible for sampling should be sampled prior to disturbance.



CTL Environmental Services

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Point Dume
Building D (Rooms 10-12)

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Frisable	Damage
Stucco	3469	None Detected	Exterior room 10, northwest corner	Exterior walls	2,000 sq. ft.	No	No
Smooth plaster	3470	None Detected	Room 11, northeast corner	Room 10, 10A, B, C; 11, 12	3,600 sq. ft.	No	No
Joint compound	3471	None Detected	Room 10A, northeast corner	Room 10 A, B, C, (walls)	300 sq. ft.	No	No
Joint compound	3472	None Detected	Room 10B, northeast corner	Room 10 A, B, C, (walls)	300 sq. ft.	No	No
Joint compound	3473	None Detected	Room 10C, southeast corner	Room 10 A, B, C, (walls)	300 sq. ft.	No	No
Drywall	3474	None Detected	Room 10A, northwest corner	Room 10 A, B, C, (walls)	300 sq. ft.	No	No
Composite, drywall with joint compound	3475	None Detected	Room 10A, northeast corner	Room 10 A, B, C, (walls)	300 sq. ft.	No	No
12"x12" micro-perforated ceiling tile	Same as # 3422	None Detected	Previously sampled, building A	Room 10, 10A, B, C; 11, 12	2,700 sq. ft.	Yes	No
12"x12" green speckled floor tile with adhesive	3476	None Detected (tile) 3% Chrysotile (mastic)	Room 10, northwest corner	Room 10, 11, 10A	1,700 sq. ft.	No	No
9"x9" beige with white streaks floor tile with mastic	Same as # 3458	6% Chrysotile (beige flooring) 4% Chrysotile (black mastic)	Previously sampled building C	Room 10 (perimeter patches) Room 10 C	80 sq. ft.	No	No
12"x12" blue speckled floor tile with adhesive	Same as # 3423	None Detected	Previously sampled, building A	Room 12	300 sq. ft.	No	No
4" green covebase with adhesive	3477	None Detected (tile) None Detected (glue)	Room 10, north center	Room 10	200 ln. ft.	No	No
4" black covebase with adhesive	3478	None Detected (tile) None Detected (glue)	Room 12, northeast corner	Room 12	120 ln. ft.	No	No
Beige floor tile with mastic (under carpet)	3479	7% Chrysotile (flooring) 4% Chrysotile (mastic)	Room 10B, southeast corner	Room 10B (under carpet) room 12 under carpet and floor tile	900 sq. ft.	No	No
Blue multi colored carpet glue	Same as # 3427	None Detected	Previously sampled, building A	Room 12	700 sq. ft.	No	No
Acoustical plaster ceiling	Same as # 3494	None Detected	Previously sampled, building A	Room 10, 10A, B, C; 11, 12 (above ceiling tile)	2,700 sq. ft.	No	No
Ceiling tile mastic	Same as # 3495	None Detected	Previously sampled, building A	Room 10, 10A, B, C; 11, 12 (above ceiling tile)	2,700 sq. ft.	No	No
Barrier paper	N/A	Assumed	Not sampled, material intact	Exterior walls under stucco	2,000 sq. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu United School District
 PROJECT NO: 107-0008
 PROJECT NAME: Point Dume
 Building D (Rooms 10-12)

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Friable	Damage
Chalk boards	N/A	Assumed	Not sampled, material intact	Rooms 11 & 12	50 sq. ft.	No	No
Cork board mastic	N/A	Assumed	Not sampled, material intact	Rooms 11 & 12	50 sq. ft.	No	No
Acoustical plaster ceiling	3831	None Detected	Room 12, 8 feet north and 12 feet west of southeast corner	Rooms 10-12	2,700 sq. ft.	No	No

Notes:

Exterior walls consist of sections of wood siding. This area is inaccessible for inspection
 Interior walls consist of fiberboard panels on plaster. This area is inaccessible for inspection
 All materials assumed ACM or inaccessible for sampling should be sampled prior to disturbance.



MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu United School District
PROJECT NO: 107-0008
PROJECT NAME: Point Dume
Building E (Rooms 13-15)

Page 1 of 2

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Friable	Damage
Stucco	3480	None Detected	Exterior northwest corner by storage area	Exterior walls	1,000 sq. ft.	No	No
Smooth plaster	3481	None Detected	Storage room, southwest corner	Storage room, rooms 13, 14, 15	4,000 sq. ft.	No	No
12"x12" micro-perforated ceiling tile	Same as # 3422	None Detected	Previously sampled, building A	Room 13, 14, 15	2,700 sq. ft.	Yes	No
12"x12" blue speckled floor tile with adhesive	Same as # 3423	None Detected	Previously sampled, building A	Room 13, 14, 15	1,500 sq. ft.	No	No
9"x9" beige floor tile with mastic	Same as # 3458	6% Chrysotile (beige flooring) 4% Chrysotile (black mastic)	Previously sampled, building C	Storage room	150 sq. ft.	No	No
Blue multi colored carpet glue	3482	None Detected	Room 13, center	Rooms 13, 14, 15	1,200 sq. ft.	No	No
4" black covebase with adhesive	Same as # 3429	None Detected	Previously sampled, building A	Room 13, 14, 15	360 ln. ft.	No	No
4" beige covebase with adhesive	Same as # 3447	None Detected	Previously sampled, building B	Storage room	40 ln. ft.	No	No
Chalk boards	N/A	Assumed	Not sampled, material intact	Rooms 13, 14, 15	50 sq. ft.	No	No
Cork board mastic	N/A	Assumed	Not sampled, material intact	Rooms 13, 14, 15	50 sq. ft.	No	No
Beige floor tile mastic (under carpet)	3498	3% Chrysotile (floor tile) 5% Chrysotile (mastic)	Room 13, center	Rooms 13, 14, 15 (under floor tile and carpet)	2,700 sq. ft.	No	No
Acoustical plaster ceiling	Same as # 3494	None Detected	Previously sampled, building A	Rooms 13, 14, 15 (above ceiling tile)	2,700 sq. ft.	No	No
Ceiling tile mastic	Same as # 3495	None Detected	Previously sampled, building A	Rooms 13, 14, 15 (above ceiling tile)	2,700 sq. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu United School District
 PROJECT NO: 107-0008
 PROJECT NAME: Point Dume
Building E (Rooms 13-15)

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Friable	Damage
Barrier paper (under stucco)	N/A	Assumed	Not sampled, none destructive sampling	Exterior walls (under stucco)	1,000 sq. ft.	No	No
Acoustical plaster ceiling	3832	None Detected	Room 13, 12 feet south and 12 feet west of northeast corner	Rooms 13-15	2,700 sq. ft.	No	No

Notes:

Window frames consist of metal no putty was observed
 Exterior walls consist of sections of wood siding
 Interior walls consist of fiberboard panels on plaster. This area was inaccessible for inspection
 All materials assumed ACM or inaccessible for sampling should be sampled prior to disturbance.

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu United School District
 PROJECT NO: 107-0008
 PROJECT NAME: Point Dume
 Building F (Rooms 16-18)

Page 1 of 1

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty. sq. ft.	Friable	Damage
Stucco	3485	<1% Chrysotile	Exterior room 18, northeast corner	Exterior walls	400	No	No
Smooth plaster	3486	None Detected	Room 16, east center	Rooms 16, 17, 18	1,800	No	No
12"x12" micro-perforated ceiling tile	Same as # 3422	None Detected	Previously sampled, building A	Rooms 16, 17, 18	2,700	Yes	No
12"x12" blue speckled floor tile with adhesive	Same as # 3423	None Detected	Previously sampled, building A	Rooms 16, 17, 18	900	No	No
Blue multi colored carpet glue	Same as # 3482	None Detected	Previously sampled, building E	Rooms 16, 17, 18 (predominant)	1,500	No	No
4" black covebase with adhesive	Same as # 3429	None Detected	Previously sampled, building A	Rooms 16, 17, 18	350	No	No
Chalk boards	N/A	Assumed	Not sampled, material intact	Rooms 16, 17, 18	50	No	No
Cork board mastic	N/A	Assumed	Not sampled, material intact	Rooms 16, 17, 18	50	No	No
Ceiling tile mastic	Same as # 3495	None Detected	Previously sampled, building A	Rooms 16, 17, 18 (above ceiling tile)	2,700	No	No

Notes:

Window frames consist of metal, no putty was observed
 Interior walls consist of sections of fiberboard panels on plaster. This area is inaccessible for inspection
 Exterior walls are concrete
 Rooms 16 through 18 have concrete above ceiling tiles
 All materials assumed ACM or inaccessible for sampling should be sampled prior to disturbance.



CTL Environmental Services

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu United School District
PROJECT NO: 107-0008
PROJECT NAME: Point Dume Elementary
Building G (Rooms 3-6)

Page 1 of 1

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Friable	Damage
Stucco	3483	<1% Chrysotile	Exterior by entry to room 5	Exterior walls	1,000 sq. ft.	No	No
Smooth plaster	3484	None Detected	Room 4, northeast corner	Rooms 3, 4, 5, 6	5,000 sq. ft.	No	No
12"x12" micro-perforated ceiling tile	Same as # 3422	None Detected	Previously sampled, building A	Rooms 3, 4, 5, 6	3,600 sq. ft.	Yes	No
12"x12" blue speckled floor tile with adhesive	Same as # 3423	None Detected	Previously sampled, building A	Rooms 3, 4, 5, 6	1,100 sq. ft.	No	No
Blue multi colored carpet	Same as # 3482	None Detected	Previously sampled, building E	Rooms 3, 4, 5, 6	2,500 sq. ft.	No	No
4" black covebase with adhesive	Same as # 3429	None Detected	Previously sampled, building A	Rooms 3, 4, 5, 6	480 ln. ft.	No	No
Chalk boards	N/A	Assumed	Not sampled, material intact	Rooms 3, 4, 5, 6	60 sq. ft.	No	No
Corkboard mastic	N/A	Assumed	Not sampled, material intact	Rooms 3, 4, 5, 6	60 sq. ft.	No	No
Beige floor tile with mastic (under carper and floor tile)	3479	7% Chrysotile (flooring) 4% Chrysotile (mastic)	Previously sampled	Rooms 3, 4, 5, 6 (under floor tile and carpet)	3,600 sq. ft.	No	No
Acoustical plaster ceiling	Same as # 3494	None Detected	Previously sampled, building A	Rooms 3, 4, 5, 6 (above ceiling tile)	3,600 sq. ft.	No	No
Ceiling tile mastic	Same as # 3495	None Detected	Previously sampled, building A	Rooms 3, 4, 5, 6 (above ceiling tile)	3,600 sq. ft.	No	No
Barrier paper (under stucco)	N/A	Assumed	Not sampled, material intact	Exterior walls under stucco	1,000 sq. ft.	No	No
Acoustical plaster ceiling	3833	None Detected	Room 5, 15 feet east and 6 feet south of northwest corner	Building G- rooms	3,600 sq. ft.	No	No

Notes:

Window frames consist of metal, no putty observed
Interior walls consist of sections of fiberboard panels on plaster. This area is inaccessible for inspection.
Exterior walls consists of wood siding . This area is inaccessible for inspection.
All materials assumed ACM or inaccessible for sampling should be sampled prior to disturbance.



CTL Environmental Services

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Point Dume
Building H (Room 7-9)

Page 1 of 1

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Friable	Damage
Stucco	3487	None Detected	Exterior Room U, northeast corner	Exterior walls	500 sq. ft.	No	No
Smooth plaster	3488	None Detected	Room 7, east center	Room 7, 8, 9	2,000 sq. ft.	No	No
Sand plaster	3489	None Detected	Restroom 1, north wall center	Restroom 1 & 2, Room U	900 sq. ft.	No	No
12"x12" micro-perforated ceiling tile	Same as # 3422	None Detected	Previously sampled, building A	Room 7, 8, 9	2,700 sq. ft.	No	No
12"x12" blue speckled floor tile with adhesive	Same as # 3423	None Detected	Previously sampled, building A	Room 7, 8, 9	1,100 sq. ft.	No	No
Blue multi colored carpet glue	3482	None Detected	Room 13, center	Room 7, 8, 9	2,500 sq. ft.	No	No
Light grey square pattern sheet vinyl flooring	3490	None Detected	Room 9, center	Room 7, 8, 9 (patch)	300 sq. ft.	No	No
Cork board mastic	N/A	Assumed	Not sampled, material intact	Room 7, 8, 9	70 sq. ft.	No	No
Chalkboards	N/A	Assumed	Not sampled, material intact	Room 7, 8, 9	70 sq. ft.	No	No
4" black covebase with adhesive	3429	None Detected	K 1, southeast corner	Room 7, 8, 9	360 sq. ft.	No	No
Ceiling tile mastic	Same as # 3495	None Detected	Previously sampled, building A	Room 7, 8, 9 (above ceiling tile)	2,700 sq. ft.	No	No

Notes:

Window frames consist of metal, no putty was observed
Interior walls consist of sections of fiberboard panels on plaster. This area is inaccessible for inspection.
All materials assumed ACM or inaccessible for sampling should be sampled prior to disturbance.
Exterior walls are concrete
Rooms 7, 8, 9 have cement above ceiling tiles



CTL Environmental Services

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu United School District
PROJECT NO: 107-0008
PROJECT NAME: Point Dume
Restroom Building

Page 1 of 1

Material	Sample No.	Asbestos Content	Sample Location	Material Location	Approx. Qty.	Friable	Damage
Stucco	3491	None Detected	Exterior northeast corner	Exterior walls	1,200 sq. ft.	No	No
Smooth plaster	3492	None Detected	Room 81, north wall center	Restroom 1, restroom 2, 81, 82	1,200 sq. ft.	No	No
12"x12" blue speckled floor tile with adhesive	Same as # 3423	None Detected	Previously sampled, building A	Room 82	200 sq. ft.	No	No
4" diameter pipe insulation	3493	8% Chrysotile	Room 81, south center	Room 81	3 elbows	Yes	No
4" grey covebase with adhesive	Same as # 3423	None Detected	Previously sampled, building A	Room 82	20 ln. ft.	No	No

Notes:

Window frames consist of metal, no putty was observed

All materials assumed ACM or inaccessible for sampling should be sampled prior to disturbance.

APPENDIX B

LABORATORY ANALYSIS REPORT



Please Reply To:

AmeriSci Los Angeles

24416 S. Main Street, Ste 308
Carson, California 90745
TEL: (310) 834-4868 • FAX: (310) 834-4772

FACSIMILE TELECOPY TRANSMISSION

To: C. Ruvalcaba
CTI. Environmental Services
Fax #: (310) 530-0792

From: Arturo A. Aldana
AmeriSci Job #: 908041341
Subject: PLM 3 day Results
Client Project: 107-0008; Point Dume Bldg. A

Email:

Date: Friday, April 18, 2008
Time: 11:50:25

Number of Pages: 10
(including cover sheet)

Comments:

CONFIDENTIALITY NOTICE: Unless otherwise indicated, the information contained in this communication is confidential information intended for use of the individual named above. If the reader of this communication is not the intended recipient, you are hereby notified that any dissemination, distribution or copying of this communication is prohibited. If you have received this communication in error, please immediately notify the sender by telephone and return the original message to the above address via the US Postal Service at our expense. Preliminary data reported here will be verified before final report is issued. Samples are disposed of in 60 days or unless otherwise instructed by the protocol or special instructions in writing. Thank you.

Certified Analysis Service 24 Hours A Day • 7 Days A Week Competitive Prices
visit our web site - www.amerisci.com

Boston • Los Angeles • New York • Richmond

**AmeriSci Los Angeles**

24416 S. Main Street, Ste 308

Carson, California 90745

TEL: (310) 834-4868 • FAX: (310) 834-4772

PLM Bulk Asbestos Report

CTL Environmental Services

Attn: C. Ruvalcaba

24404 S. Vermont Ave.

Suite 307

Harbor City, CA 90710

Date Received 04/16/08

Date Examined 04/18/08

AmeriSci Job # 908041341

P.O. # 32389

Page 1 of 7

RE: 107-0008; Point Dume Bldg. A

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3419 Location: Stucco	908041341-01	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Grey/Beige, Heterogeneous, Non-Fibrous, Cementitious, Stucco Asbestos Types: Other Material: Non-fibrous 100 %			
3420 Location: Smooth Plaster	908041341-02	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Beige/White, Heterogeneous, Non-Fibrous, Cementitious, Plaster Asbestos Types: Other Material: Non-fibrous 100 %			
3421 Location: Sand Plaster	908041341-03	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Off-White, Heterogeneous, Non-Fibrous, Cementitious, Plaster Asbestos Types: Other Material: Non-fibrous 100 %			
3422 Location: 12" X 12" Micro-Perforated Ceiling Tile	908041341-04	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Brown/White, Heterogeneous, Fibrous, Ceiling Tile Asbestos Types: Other Material: Cellulose 70 %, Non-fibrous 30 %			
3423 Location: 12" X 12" Blue Speckled Floor Tile W/Adhesive	908041341-05L1	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Blue, Homogeneous, Non-Fibrous, Floor Tile Asbestos Types: Other Material: Non-fibrous 100 %			

See Reporting notes on last page

Client Name: CTL Environmental Services

PLM Bulk Asbestos Report

107-0008; Point Dume Bldg. A

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3423	908041341-05L2	No	NAD
Location: 12" X 12" Blue Speckled Floor Tile W/Adhesive			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Clear/Yellow, Heterogeneous, Non-Fibrous, Adhesive			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3424	908041341-06L1	No	NAD
Location: 12" X 12" Beige Speckled Floor Tile W/Adhesive W/Black Residual Mastic			(by CVES) by Arturo A. Aldana on 04/10/08
Analyst Description: Off-White / Beige, Homogeneous, Non-Fibrous, Floor Tile			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3424	908041341-06L2	No	NAD
Location: 12" X 12" Beige Speckled Floor Tile W/Adhesive W/Black Residual Mastic			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Yellow, Heterogeneous, Non-Fibrous, Mastic			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3424	908041341-06L3	Yes	4 %
Location: 12" X 12" Beige Speckled Floor Tile W/Adhesive W/Black Residual Mastic			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Black, Heterogeneous, Non-Fibrous, Mastic			
Asbestos Types: Chrysotile 4.0 %			
Other Material: Non-fibrous 96 %			
3425	908041341-07L1	Yes	4 %
Location: 9" X 9" Beige W/White Streaks F. T. W/Mastic			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Tan, Homogeneous, Non-Fibrous, Floor Tile			
Asbestos Types: Chrysotile 4.0 %			
Other Material: Non-fibrous 96 %			
3425	908041341-07L2	Yes	5 %
Location: 9" X 9" Beige W/White Streaks F. T. W/Mastic			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Black, Heterogeneous, Non-Fibrous, Mastic			
Asbestos Types: Chrysotile 5.0 %			
Other Material: Non-fibrous 95 %			

See Reporting notes on last page

Client Name: CTL Environmental Services

PLM Bulk Asbestos Report

107-0008; Point Dume Bldg. A

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3426	908041341-08L1	No	NAD
Location: 12" X 12" Green Speckled Floor Tile W/Adhesive W/Black Residual Mastic			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Green, Homogeneous, Non-Fibrous, Floor Tile			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3426	908041341-08L2	No	NAD
Location: 12" X 12" Green Speckled Floor Tile W/Adhesive W/Black Residual Mastic			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Yellow, Heterogeneous, Non-Fibrous, Mastic			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3426	908041341-08L3	Yes	4 %
Location: 12" X 12" Green Speckled Floor Tile W/Adhesive W/Black Residual Mastic			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Black, Heterogeneous, Non-Fibrous, Mastic			
Asbestos Types: Chrysotile 4.0 %			
Other Material: Non-fibrous 96 %			
3427	908041341-09	No	NAD
Location: Blue Multi Colored Carpet Glue			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Yellow, Heterogeneous, Non-Fibrous, Glue			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3428	908041341-10		NA
Location: Not Used			
Analyst Description: Bulk Material			
Asbestos Types:			
Other Material:			
3429	908041341-11L1	No	NAD
Location: 4" Black Cove Base W/Adhesive			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Black, Homogeneous, Non-Fibrous, Cove Base			
Asbestos Types:			
Other Material: Non-fibrous 100 %			

See Reporting notes on last page

PLM Bulk Asbestos Report

107-0008; Point Dume Bldg. A

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3429	908041341-11L2 Location: 4" Black Cove Base W/Adhesive	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: White, Heterogeneous, Non-Fibrous, Adhesive Asbestos Types: Other Material: Non-fibrous 100 %			
3430	908041341-12L1 Location: 4" T. Covebase W/Adhesive	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Grey, Homogeneous, Non-Fibrous, Cove Base Asbestos Types: Other Material: Non-fibrous 100 %			
3430	908041341-12L2 Location: 4" T. Covebase W/Adhesive	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Off-White, Heterogeneous, Non-Fibrous, Adhesive Asbestos Types: Other Material: Non-fibrous 100 %			
3430	908041341-12L3 Location: 4" T. Covebase W/Adhesive	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Dark Brown, Heterogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Non-fibrous 100 %			
3431	908041341-13L1 Location: 4" Grey Cove Base W/Adhesive	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Grey, Homogeneous, Non-Fibrous, Cove Base Asbestos Types: Other Material: Non-fibrous 100 %			
3431	908041341-13L2 Location: 4" Grey Cove Base W/Adhesive	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Yellow, Heterogeneous, Non-Fibrous, Adhesive Asbestos Types: Other Material: Non-fibrous 100 %			

See Reporting notes on last page

Client Name: CTL Environmental Services

PLM Bulk Asbestos Report

107-0008; Point Dume Bldg. A

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3432	908041341-14L1 Location: 4" Beige Cove Base W/Adhesive	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Tan, Homogeneous, Non-Fibrous, Cove Base Asbestos Types: Other Material: Non-fibrous 100 %			
3432	908041341-14L2 Location: 4" Beige Cove Base W/Adhesive	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Dark Brown, Heterogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Non-fibrous 100 %			
3433	908041341-15L1 Location: 4" Green Cove Base W/Adhesive	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Green, Homogeneous, Non-Fibrous, Cove Base Asbestos Types: Other Material: Non-fibrous 100 %			
3433	908041341-15L2 Location: 4" Green Cove Base W/Adhesive	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Yellow, Heterogeneous, Non-Fibrous, Adhesive Asbestos Types: Other Material: Non-fibrous 100 %			
3434	908041341-16L1 Location: 4" Blue Cove Base W/Adhesive	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Blue, Homogeneous, Non-Fibrous, Cove Base Asbestos Types: Other Material: Non-fibrous 100 %			
3434	908041341-16L2 Location: 4" Blue Cove Base W/Adhesive	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Off-White, Heterogeneous, Non-Fibrous, Adhesive Asbestos Types: Other Material: Non-fibrous 100 %			

See Reporting notes on last page

Client Name: CTL Environmental Services

PLM Bulk Asbestos Report

107-0008; Point Dume Bldg. A

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3435	908041341-17L1	No	NAD
Location: Lt. Brown Floor Tile W/Mastic			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Brown, Homogeneous, Non-Fibrous, Floor Tile			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3435	908041341-17L2	No	NAD
Location: Lt. Brown Floor Tile W/Mastic			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Yellow, Heterogeneous, Non-Fibrous, Mastic			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3435	908041341-17L3	Yes	3 %
Location: Lt. Brown Floor Tile W/Mastic			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Black, Heterogeneous, Non-Fibrous, Mastic			
Asbestos Types: Chrysotile 3.0 %			
Other Material: Non-fibrous 97 %			
3436	908041341-18L1	Yes	4 %
Location: Lt. Brown Floor Tile W/Mastic			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Tan, Homogeneous, Non-Fibrous, Floor Tile			
Asbestos Types: Chrysotile 4.0 %			
Other Material: Non-fibrous 96 %			
3436	908041341-18L2	Yes	5 %
Location: Lt. Brown Floor Tile W/Mastic			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Black, Heterogeneous, Non-Fibrous, Mastic			
Asbestos Types: Chrysotile 5.0 %			
Other Material: Non-fibrous 95 %			
3494	908041341-19	No	NAD
Location: Acoustical Plaster Ceiling			(by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Plaster			
Asbestos Types:			
Other Material: Non-fibrous 100 %			

See Reporting notes on last page

Client Name: CTL Environmental Services

PLM Bulk Asbestos Report

107-0008; Point Dume Bldg. A

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3495 Location: Ceiling Tile Mastic	908041341-20	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Dark Brown, Heterogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Non-fibrous 100 %			
3496 Location: Stucco	908041341-21	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Light Grey, Heterogeneous, Non-Fibrous, Cementitious, Stucco Asbestos Types: Other Material: Non-fibrous 100 %			
3497 Location: Smooth Plaster	908041341-22	No	NAD (by CVES) by Arturo A. Aldana on 04/18/08
Analyst Description: Beige/White, Heterogeneous, Non-Fibrous, Cementitious, Plaster Asbestos Types: Other Material: Non-fibrous 100 %			

Reporting Notes:

Analyzed By: Arturo A. Aldana art ald Date Analyzed: 4/18/2008 4.18.08
 *NAD = no asbestos detected; Detection Limit <1%; Reporting Limits: CVES = 1%, 400 Pt Ct = 0.25%, 1000 Pt Ct = 0.1%; NA = not analyzed; NA/PS = not analyzed / positive stop; NVA = No Visible Asbestos; PLM (polarized light microscopy) Bulk Asbestos Analysis by EPA 800/M4-82-020 per 40 CFR 763 (NVLAP Lab #200346-U, CA ELAP Lab #2322); Note: PLM is not consistently reliable in detecting asbestos in floor coverings and similar NOB materials. TEM is currently the only method that can be used to determine if this material can be considered or treated as non-asbestos-containing in New York State (also see EPA Advisory for floor tile, FR 59, 146, 38970, 8/1/94). NIST Accreditation requirements mandate that this report must not be reproduced except in full with the approval of the laboratory. This PLM report relates ONLY to the items tested.
 Reviewed By: [Signature] 4/18/08



Asbestos, Lead Analysis Chain of Custody

AMERISCI LOS ANGELES
24416 S Main St. Suite 308
Carson, CA 90745
Phone (310) 834-4868
Fax (310) 834-4772

AMERISCI JOB #:

908041941

COMPANY: CTL		ADDRESS:					P.O.#: 52789	
PROJECT INFORMATION		ANALYSIS TYPE	TURNAROUND TIME					AIR FILTER INFORMATION:
			RUSH	24 HR	48 HR	72 HR	5 DAY	
JOB NAME: Point View Bldg. A		ASBESTOS TEM AHERA						MCE
		ASBESTOS PLM BULK				X		PC
JOB NUMBER: 107-0001		ASBESTOS PCM AIR						25 mm
		ASBESTOS PLM 1000 P.C.						37 mm
JOB MANAGER: C. Ruzalcaha		LEAD AIR						0.45 um
		LEAD WIPE						0.80 um
JOB DESCRIPTION:		LEAD PAINT / SOLID						TEMP:
		OTHER:						OTHER:
INITIAL RESULTS DELIVERY: ☒ FAX ☐ EMAIL ☐ VERBAL ☐ MAIL ONLY							RETURN SAMPLES YES ☐	
REPORTS TO:							PHONE:	
INVOICE TO:							FAX:	
COMMENTS:							EMAIL:	
							PAGER/CELL:	
SAMPLE ID	SAMPLE LOCATION	START TIME	STOP TIME	TOTAL TIME	LITERS X MIN.	TOTAL VOLUME	AREA SQUARE FT	
3719	Staircase							
20	Smooth Plaster							
21	Sand Plaster							
22	12" x 12" Micro-Reinforced Ceiling Tile							
23	12" x 12" Blue speckled floor tile w/ Adhesive							
24	12" x 12" Beige speckled floor tile w/ Adhesive & black Residual Plaster							
25	Blue Mottled Colored Carpet Glue							
26	12" x 12" Green speckled floor tile w/ Adhesive & black Residual Plaster							
27	Blue Mottled Colored Carpet Glue							
28	Black Glue							
29	4" Black Cove base w/ Adhesive							
30	4" Tan Cove base w/ Adhesive							
31	4" Grey Cove base w/ Adhesive							
32	4" Beige Cove base w/ Adhesive							
33	4" Green Cove base w/ Adhesive							
34	4" Blue Cove base w/ Adhesive							
35	Light Brown floor tile w/ Mastic							
36								
37	Acoustical Plaster Ceiling							
38	Ceiling tile Mastic							
SAMPLED BY: [Signature]		DATE/TIME: 4/12/88		RECEIVED BY: [Signature]		DATE/TIME: 4/12/88		
RELINQUISHED BY: [Signature]		DATE/TIME: 4/12/88		RECEIVED BY: [Signature]		DATE/TIME: 4/12/88 @ 1340		
RELINQUISHED BY:		DATE/TIME:		RECEIVED IN LAB BY:		DATE/TIME:		

CTL ENVIRONMENTAL SERVICES FIELD BULK SAMPLE LIST

CLIENT: S. MpluSD PROJECT NO.: 167-0008 PROJECT NAME: Point Dume - Bldg A "Main Office"

TECHNICIAN: F. Ruvalcaba DATE: 4/4/88 PAGE: 1 of 3

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	Stucco	3419	Exterior - Work Room - North West Corner	Exterior walls & Overhangs	2500 sq. ft.	N	N
	Smooth Plaster	3420	(- South East Corner at Elevator (Black Switch))	Exterior walls: K1, K2, K1 Bks, PTA Office A & B, Resource Office, Maintenance, Principal's Office, all Bks, file room, storage room, hallway to work room, copy room, nurse's office, nurse's office A, hallway B, lounge, room 1, room 2	2200 sq. ft.	N	N
	Sand Plaster	3421	Hallway B - North East Corner	Hallway B	150 sq. ft.	N	N
	Micro-Perforated 12"x12" Tapered Ceiling tile	3422	Room 2 - 10' East & 5' South of North West Corner	K1, K2, PTA Office A, B, Resource; Main Office, Principal's Office, Hallway A, Work Room, Nurse's Office, Nurse's Office B, Hallway B, lounge, PTA Office B, room 1, room 2	5000 sq. ft.	N	N
	Blue Speckled 12"x12" Tapered Ceiling tile w/ Adhesive	3423	Room K2 - 5' N & 5' West of South East	K1, K2, room 1, room 2	1200 sq. ft.	N	N
	12"x12" Beige Speckled Floor tile w/ Adhesive w/ Mortar	3424	Resource Room - South East Corner	PTA Office A, Resource Room	250 sq. ft.	N	N
	9" Beige w/ White Stracks Floor tile w/ Mortar	3425	PTA Office B - South East Corner	PTA Office B	100 sq. ft.	N	N
*	12"x12" Green Speckled Floor tile w/ Adhesive w/ Mortar	3426	File Room - North East Corner	Main Office, Principal's Office, file room, storage room, hallway A, B, work room, copy room, Nurse's Office, Nurse's Office A, Lounge	2500 sq. ft.	N	N
	Blue Multi-Colored Carpet Glue	3427	Room K2 - 5' North & 5' West of South East	K1, K2, room 1, room 2	1900 sq. ft.	N	N
	Light Brown Carpet Glue			No Glue Present Nailed on Type Carpet Principals Office, K1, K2			

Note: Exterior walls consist of sections of wood siding. Prior to removal or renovation then not necessary. Material should be further inspected for suspect asbestos before removal.

ACM * Black Mastic Remains under Carpet in Principals Office

for inspection

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: SMMUSD

PROJECT NO.: 107-0008

PROJECT NAME: Point Delmar - Bldg A "Main Office"

TECHNICIAN: F. Lucchesi

DATE: 4/14/08

PAGE: 2 of 3

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	4" Black Cove base w/ Adhesive	3429	K1 - South East Corridor	K1, K2, Rm 1, Rm 2	500 14.44	W	2
	4" Tongue and Groove w/ Adhesive	3430	Rm K1 - North Center by R11	K1, K2	120 14.44		
	4" Grey Cove base w/ Adhesive	3431	Recessed Rm - South East Corridor	Recessed Rm, PTA Office A	50 14.44		
	4" Beige Cove base w/ Adhesive	3432	PTA Office B - South East Corridor	PTA Office B, Principals Office	20 14.44		
	4" Green Cove base w/ Adhesive	3433	File Rm - North East Corridor	File Rm, Main Office, Reception, Storage Rm, Hallway, A, B, Nurse Rm, Copy Rm, Nurses Office, Nurse's Office A, Lounge	300 14.44		
	4" Blue Cove base w/ Adhesive	3434	Lounge - North West Corridor	Lounge	10 14.44		
	Chalkboards	Assumed	West Sampled Non-Destructive Sampling	K1, K2, Rm 1, Rm 2, Recessed Rm	50 14.44	P	P
	Chalkboard Mosaic				50 14.44		
	4" Brown Speckled Floor tile w/ Mosaic	3435	Rm K2 - 5' North 3' 5' West of South East	Under Carpet in Floor tile Rms K1, K2, Rm 1, Rm 2, K2B	3600 14.44	P	P
		3436	Rm K1 - 5' South 3' 5' West of North East				

We're merging with

coffey
environments

A Coffey International
Limited company

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: Spalding
 PROJECT NO.: 107-0008
 PROJECT NAME: Point Dume - Dunes & Marine Office

TECHNICIAN: C. Runkel
 DATE: 4/14/08
 PAGE: 3 of 3

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	Acoustical Plaster Ceiling	3494	Room 2 - 10' East 1/2 5' South at North West Corner	See Sample #3422 for Material location (Above 12" x 12" Micro Perforated Ceiling tile)	3000 sq. ft.	N	N
	Ceiling tile/Mastic	3495					I
	Stucco	3496	Exterior - Storage shed - South West Corner	Exterior - Storage shed - Exterior	300 sq. ft.	N	N
	Smooth Plaster	3497	Exterior - Storage shed - Interior - North West Corner	Exterior - Storage shed - Interior Wall & Ceiling	300 sq. ft.	N	N
			Note: Interior walls consist of sections of Fiberboard Panels over Plaster. Upon examination Plaster should be further inspected for other mastic	Areas are in process, do for sample (see)			
	Basement Paper (under Stucco)		Not banded Material Extract	Exterior walls under Stucco	2000 sq. ft.	N	N
			Note: Windows Frames are metal No Painty was observed.				

 Additional Samples Not taken due to ceiling tile being intact (3)



Please Reply To:

AmeriSci Los Angeles

24416 S. Main Street, Ste 308

Carson, California 90745

TEL: (310) 834-4168 • FAX: (310) 834-4772

FACSIMILE TELECOPY TRANSMISSION

To: Cesar Ruvalcaba
CTL Environmental Services
Fax #: (310) 530-0792

From: Paola Ducoing
AmeriSci Job #: 908051277
Subject: PLM - day results
Client Project: 107-0108; Point Dume

Email:

Date: Monday, May 19, 2008
Time: 08:18:37

Number of Pages:

5
(including cover sheet)

Comments:

CONFIDENTIALITY NOTICE: Unless otherwise indicated, the information contained in this communication is confidential information intended for use of the individual named above. If the reader of this communication is not the intended recipient, you are hereby notified that any dissemination, distribution or copying of this communication is prohibited. If you have received this communication in error, please immediately notify the sender by telephone and return the original message to the above address via the US Postal Service at our expense. Preliminary data reported here will be verified before final report is issued. Samples are disposed of in 60 days or unless otherwise instructed by the protocol or special instructions in writing. Thank you.

Certified Analysis Service 24 Hours A Day • 7 Days A Week Competitive Prices
visit our website - www.amerisci.com

Boston • Los Angeles • New York • Richmond

**AmeriSci Los Angeles**

24416 S. Main Street, Ste 308

Carson, California 90745

TEL: (310) 834-4861 • FAX: (310) 834-4772

PLM Bulk Asbestos Report

CTL Environmental Services

Attn: Cesar Ruvalcaba

24404 S. Vermont Ave.

Suite 307

Harbor City, CA 90710

Date Received 05/16/08

Date Examined 05/19/08

RE: 107-0008; Point Dume

AmeriSci Job # 908051277

P.O. # 12447

Page 1 of 3

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3823	908051277-01	No	NAD
Location: Acoustical Plaster Ceiling			(by CVES) by Paola Ducoing on 05/19/08
Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Plaster			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3824	908051277-02	No	NAD
Location: Acoustical Plaster Ceiling			(by CVES) by Paola Ducoing on 05/19/08
Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Plaster			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3825	908051277-03	No	NAD
Location: Acoustical Plaster Ceiling			(by CVES) by Paola Ducoing on 05/19/08
Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Plaster			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3826	908051277-04	No	NAD
Location: Acoustical Plaster Ceiling			(by CVES) by Paola Ducoing on 05/19/08
Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Plaster			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3827	908051277-05	No	NAD
Location: Acoustical Plaster Ceiling			(by CVES) by Paola Ducoing on 05/19/08
Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Plaster			
Asbestos Types:			
Other Material: Non-fibrous 100 %			

See Reporting notes on last page

AmeriSci Job #: 908051277

Client Name: CTL Environmental Services

Page 2 of 3

PLM Bulk Asbestos Report

107-0008; Point Dune

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3828 Location: Acoustical Plaster Ceiling Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Plaster Asbestos Types: Other Material: Non-fibrous 100 %	908051277-06	No	NAD (by CVES) by Paola Ducoing on 05/19/08
3829 Location: Acoustical Plaster Ceiling Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Plaster Asbestos Types: Other Material: Cellulose 3 %, Non-fibrous 97 %	908051277-07	No	NAD (by CVES) by Paola Ducoing on 05/19/08
3830 Location: Acoustical Plaster Ceiling Analyst Description: Beige, Heterogeneous, Non-Fibrous, Plaster Asbestos Types: Other Material: Non-fibrous 100 %	908051277-08	No	NAD (by CVES) by Paola Ducoing on 05/19/08
3831 Location: Acoustical Plaster Ceiling Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Plaster Asbestos Types: Other Material: Non-fibrous 100 %	908051277-09	No	NAD (by CVES) by Paola Ducoing on 05/19/08
3832 Location: Acoustical Plaster Ceiling Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Plaster Asbestos Types: Other Material: Non-fibrous 100 %	908051277-10	No	NAD (by CVES) by Paola Ducoing on 05/19/08
3833 Location: Acoustical Plaster Ceiling Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Plaster Asbestos Types: Other Material: Non-fibrous 100 %	908051277-11	No	NAD (by CVES) by Paola Ducoing on 05/19/08

See Reporting notes on last page

AmeriSci Job #: 908051277


Client Name: CTL Environmental Services


Page 3 of 3

PLM Bulk Asbestos Report

107-0008; Point Dune

Reporting Notes:

Analyzed By: Paola Ducoing ; Date Analyzed: 5/19/2008 5/19/08
*NAD = no asbestos detected; Detection Limit <1%; Reporting Limits: CVES = 1%, 400 Pt Ct = 0.25%, 1000 Pt Ct = 0.1%; NA = not analyzed; NAVPS = not analyzed / positive stop; NVA = No Visible Asbestos; PLM (polarized light microscopy) Bulk Asbestos Analysis by EPA 600/M4-82-020 per 40 CFR 763 (NVLAP Lab #200346-0, CA ELAP lab #2322); Note: PLM is not consistently reliable in detecting asbestos in floor coverings and similar NOB materials. TEM is currently the only method that can be used to determine if this material can be considered or treated as non-asbestos-containing in New York State (also see EPA Advisory for floor tile, FR 59, 146, 38970, 8/1/94). NIST Accreditation requirements mandate that this report must not be reproduced except in full with the approval of the laboratory. This PLM report relates ONLY to the items tested.

Reviewed By:  5/19/08



Asbestos, Lead Analysis Chain of Custody

AMERISCI JOB #:

908051877-

AMERISCI LOS ANGELES

24116 S Main St. Suite 308

Carson, CA 90745

Phone (310) 834-4868

Fax (310) 834-4772

COMPANY: CTL		ADDRESS:				P.O.#: 32847	
PROJECT INFORMATION		ANALYSIS TYPE	TURNAROUND TIME				AIR FILTER INFORMATION:
			RUSH	24 HR	48 HR	72 HR	
JOB NAME: Port Dunes		ASBESTOS TEM AHERA					MCE
		ASBESTOS PLM BULK					PC
JOB NUMBER: 107-0008		ASBESTOS PCM AIR					25 mm
		ASBESTOS PLM 1000 P.C.					37 mm
JOB MANAGER: C. Ruvalec		LEAD AIR					0.45 um
		LEAD WIPE					0.80 um
JOB DESCRIPTION:		LEAD PAINT / SOLID					TEMP:
		OTHER:					OTHER:
INITIAL RESULTS DELIVERY: ☒ FAX ☐ EMAIL ☐ VERBAL ☐ MAIL ONLY						RETURN SAMPLES Yes ☐	
REPORTS TO:						PHONE:	
INVOICE TO:						FAX:	
COMMENTS:						EMAIL:	
						PAGER/CELL:	
SAMPLE ID	SAMPLE LOCATION	START TIME	STOP TIME	TOTAL TIME	LITERS / MIN.	TOTAL VOLUME	AREA SQUARE FT
3823	Acoustical Plaster Ceiling						
24							
25							
26							
27							
28							
29							
30							
31							
32							
33							
SAMPLED BY: [Signature]		DATE/TIME: 5/16/08		RECEIVED BY: [Signature]		DATE/TIME:	
RELINQUISHED BY: [Signature]		DATE/TIME: 5/16/08		RECEIVED BY: [Signature]		DATE/TIME:	
RELINQUISHED BY:		DATE/TIME:		RECEIVED IN LAB BY: [Signature]		DATE/TIME: 5/16/08	

 Asbestos, Environmental Chemistry and Microbiology Analysis
 Boston Los Angeles New York Richmond

Page 1 of 1

K&M Company FOLY-WU

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: SANMUSP
 PROJECT NO.: 107-0008
 PROJECT NAME: Point Dume -

Technician: F. Ruvalcaba
 Date: 5/16/88
 Page: 1 of 2

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	Acoustical Plaster Ceiling	3823	Rm K1 - 9' South of North west corner	Bldg A - "Admin Bldg" - Rm K1, K2, CTA Office #3, Resource j. Main office, Privileged	5000 35 ft	N	N
		3824	Rm K2 - 8' South of West of North East corner	Office, Hallway A, Work Rm, Nurse's office, Nurse's office A, Hallway B, Lounge, Rm 1, Rm 2			
		3825	Rm K2 - 9' North of 15' West of South East corner				
		3826	Rm 2 - 10' West of 10' North of South East corner				
		3827	Rm 2 - 10' East of 10' North of South west				
		3828	Rm K1 - 10' North of West 12' East of 3' W				
		Previous sample	PAD-Sample # 3494				
		3829	Library - Speech Rm South west corner	Bldg B - "Library" - Library, office, Text Book Rm, Speech Rm	2000 35 ft	N	N
		3830	Cafeteria - North East corner	Bldg C - "Cafeteria" Auditorium, Stage Area, Rm 14, Rm 15	1700 35 ft	N	N
		3831	Rm 12 - 8' North of 12' West of South East corner	Bldg D - "Rm 10-12"	2000 35 ft	N	N

CTL ENVIRONMENTAL SERVICES FIELD BULK SAMPLE LIST

CLIENT: SMMLUSD
PROJECT NO.: 107-0008
PROJECT NAME: Point Pine
Technician: F. Kowalczyk
Date: 5/16/88
Page: 2 of 2

[illegible]



AmeriSci Los Angeles

24416 SOUTH MAIN STREET • SUITE 308

CARSON, CA 90745

TEL: (310) 834-4868 • FAX: (310) 834-4772

April 17, 2008

CTL Environmental Services

Attn: C. Ruvalcaba

24404 S. Vermont Ave.

Suite 307

Harbor City, CA 90710

RE: CTL Environmental Services

Job Number 908041348

P.O. #32389

107-0008; Point Dume Bldg. B

Dear C. Ruvalcaba:

Enclosed are the results for polarized light microscopy analysis (PLM) of the following CTL Environmental Services samples received at AmeriSci on Wednesday, April 16, 2008, for a 48 hour turnaround:

3437, 3438, 3439, 3440, 3441, 3442, 3443, 3444, 3445, 3446, 3447, 3448, 3449, 3450, 3451, 3452

The 16 samples contained in Ziplock Bags were shipped to AmeriSci via Hand delivery. These samples were prepared and analyzed according to the EPA Interim Method (EPA 600/M4-82-020 per 40 CFR 763, subpt F, App. A). The samples were evaluated for homogeneity by low power stereomicroscopy. Asbestos fibers were identified by PLM and dispersion staining through the determination of the required optical properties including: morphology, color, pleochroism, refractive indices, birefringence, extinction and sign of elongation. The required analytical information, analysis results, analyst signature and laboratory identification is contained in the Analyst's Report.

This report relates ONLY to the sample analysis expressed as percent asbestos. The CV for this analysis is expected to range from 0.3 to 1.2, depending on the quantity of analyte present. AmeriSci assumes no responsibility for customer supplied data such as "sample type", "location", or "area sampled". This report must not be used to claim product endorsement by AmeriSci,


AmeriSci appreciates this opportunity to serve your organization. Please contact us for any further assistance or with any questions.

Sincerely,

A handwritten signature in black ink, appearing to read "Mary S. David". The signature is fluid and cursive, with a large loop at the end.

Mary S. David
Client Services Manager

Boston - Los Angeles - New York - Richmond



**AmeriSci Los Angeles**

24416 S. Main Street, Ste 308

Carson, California 90745

TEL: (310) 834-4868 • FAX: (310) 834-4772

PLM Bulk Asbestos Report

CTL Environmental Services

Attn: C. Ruvalcaba

24404 S. Vermont Ave.

Suite 307

Harbor City, CA 90710

Date Received 04/16/08**Date Examined** 04/17/08**AmeriSci Job #** 908041348**P.O. #** 32389**Page** 1 of 5**RE:** 107-0008; Point Dume Bldg. B

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3437 Location: Stucco Analyst Description: White, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %	908041348-01	No	NAD (by CVES) by Olga K. Katsuk on 04/17/08
3438 Location: Smooth Plaster Analyst Description: Beige/White, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %	908041348-02	No	NAD (by CVES) by Olga K. Katsuk on 04/17/08
3439 Location: 12" X 12" Micro-P. Ceiling Tile Analyst Description: White/Brown, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 90 %, Non-fibrous 10 %	908041348-03	No	NAD (by CVES) by Olga K. Katsuk on 04/17/08
3440 Location: 12" X 12" Blue Speckled Floor Tile W/Adhesive Analyst Description: Grey, Homogeneous, Non-Fibrous, Flooring Asbestos Types: Other Material: Non-fibrous 100 %	908041348-04L1	No	NAD (by CVES) by Olga K. Katsuk on 04/17/08
3440 Location: 12" X 12" Blue Speckled Floor Tile W/Adhesive Analyst Description: Yellow, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Non-fibrous 100 %	908041348-04L2	No	NAD ¹ (by CVES) by Olga K. Katsuk on 04/17/08

Client Name: CTL Environmental Services

PLM Bulk Asbestos Report

107-0008; Point Dume Bldg. B

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3441	908041348-05L1	No	NAD
Location: 12" X 12" Green Speckled Floor Tile W/Adhesive			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Green, Homogeneous, Non-Fibrous, Flooring			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3441	908041348-05L2	No	NAD
Location: 12" X 12" Green Speckled Floor Tile W/Adhesive			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Yellow, Homogeneous, Non-Fibrous, Mastic			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3442	908041348-06	No	NAD
Location: Blue Multi-Colored Carpet Glue			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Yellow, Homogeneous, Non-Fibrous, Bulk Material			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3443	908041348-07L1	No	NAD
Location: 4" Black Covebase W/Adhesive			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Black, Homogeneous, Non-Fibrous, Basecove			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3443	908041348-07L2	No	NAD
Location: 4" Black Covebase W/Adhesive			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Off-White, Homogeneous, Non-Fibrous, Glue			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3444	908041348-08		NA
Location: Not Used			
Analyst Description: Bulk Material			
Asbestos Types:			
Other Material:			

Client Name: CTL Environmental Services

PLM Bulk Asbestos Report

107-0008; Point Dume Bldg. B

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3445	908041348-09L1	No	NAD
Location: 4" Green Covebase W/Adhesive			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Green, Homogeneous, Non-Fibrous, Basecove			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3445	908041348-09L2	No	NAD
Location: 4" Green Covebase W/Adhesive			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Beige, Homogeneous, Non-Fibrous, Glue			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3446	908041348-10L1	No	NAD
Location: 6" Black Covebase W/Adhesive			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Black, Homogeneous, Non-Fibrous, Basecove			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3446	908041348-10L2	No	NAD
Location: 6" Black Covebase W/Adhesive			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Off-White, Homogeneous, Non-Fibrous, Glue			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3447	908041348-11L1	No	NAD
Location: 4" Beige Covebase W/Adhesive			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Beige, Homogeneous, Non-Fibrous, Basecove			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3447	908041348-11L2	No	NAD
Location: 4" Beige Covebase W/Adhesive			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Brown, Homogeneous, Non-Fibrous, Mastic			
Asbestos Types:			
Other Material: Non-fibrous 100 %			

Client Name: CTL Environmental Services

PLM Bulk Asbestos Report

107-0008; Point Dume Bldg. B

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3448	908041348-12	No	NAD
Location: Sand Plaster			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Beige/White, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3449	908041348-13	No	NAD
Location: Vibration Reduce			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: White/Black, Heterogeneous, Fibrous, Bulk Material			
Asbestos Types:			
Other Material: Fibrous glass 50 %, Non-fibrous 50 %			
3450	908041348-14	No	NAD
Location: Duct Sealant			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Beige/White, Heterogeneous, Fibrous, Bulk Material			
Asbestos Types:			
Other Material: Fibrous glass 15 %, Non-fibrous 85 %			
3451	908041348-15L1	Yes	7 %
Location: Beige Floor Tile W/Mastic			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Beige, Heterogeneous, Fibrous, Flooring			
Asbestos Types: Chrysotile 7.0 %			
Other Material: Non-fibrous 93 %			
3451	908041348-15L2	Yes	4 %
Location: Beige Floor Tile W/Mastic			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Black, Heterogeneous, Fibrous, Mastic			
Asbestos Types: Chrysotile 2.0 %, Anthophyllite 2.0 %			
Other Material: Non-fibrous 96 %			
3452	908041348-16	Yes	10 %
Location: 4" Diameter Pipe Elbow			(by CVES) by Olga K. Katsuk on 04/17/08
Analyst Description: Beige, Heterogeneous, Fibrous, Bulk Material			
Asbestos Types: Chrysotile 10.0 %			
Other Material: Fibrous glass 15 %, Non-fibrous 75 %			



Client Name: CTL Environmental Services

PLM Bulk Asbestos Report


107-0008; Point Dume Bldg. B

Reporting Notes:

(1) Insufficient material submitted for accurate quantitation during PLM analysis (no QC possible).

Analyzed By: Olga K. Katsuk ; Date Analyzed: 4/17/2008 

*NAD = no asbestos detected; Detection Limit <1%; Reporting Limits: CVES = 1%, 400 Pt Ct = 0.25%, 1000 Pt Ct = 0.1%; NA = not analyzed; NA/PS = not analyzed / positive stop; NVA = No Visible Asbestos; PLM (polarized light microscopy) Bulk Asbestos Analysis by EPA 600/M4-82-020 per 40 CFR 763 (NVLAP Lab #200346-0, CA-ELAP lab #2322); Note: PLM is not consistently reliable in detecting asbestos in floor coverings and similar NOB materials. TEM is currently the only method that can be used to determine if this material can be considered or treated as non-asbestos-containing in New York State (also see EPA Advisory for floor tile, FR 59, 146, 38970, 8/1/94). NIST Accreditation requirements mandate that this report must not be reproduced except in full with the approval of the laboratory. This PLM report relates ONLY to the items tested.

Reviewed By: 

Asbestos, Lead Analysis Chain of Custody

AMERISCI LOS ANGELES

24416 S Main St. Suite 308

Carson, CA 90745

Phone (310) 834-4868

Fax (310) 834-4772

AMERISCI JOB #:

908041348

COMPANY: <i>CTL</i>		ADDRESS:					P.O.#: <i>32389</i>	
PROJECT INFORMATION		ANALYSIS TYPE	TURNAROUND TIME					AIR FILTER INFORMATION:
			RUSH	24 Hr	48 Hr	72 Hr	5 DAY	
JOB NAME: <i>Point Runce - Rd B</i>		ASBESTOS TEM AHERA						MCE
		ASBESTOS PLM BULK						PC
JOB NUMBER: <i>107-0008</i>		ASBESTOS PCM AIR						25 mm
		ASBESTOS PLM 1000 P.C.						37 mm
JOB MANAGER: <i>C. Rinalda</i>		LEAD AIR						0.45 um
		LEAD WIPE						0.80 um
JOB DESCRIPTION:		LEAD PAINT / SOLID						TEMP:
		OTHER:						OTHER:
INITIAL RESULTS DELIVERY: ☒ FAX ☐ EMAIL ☐ VERBAL ☐ MAIL ONLY							RETURN SAMPLES Yes ☐	
REPORTS TO:							PHONE:	
INVOICE TO:							FAX:	
COMMENTS:							EMAIL:	
							PAGER/CELL:	
SAMPLE ID	SAMPLE LOCATION	START TIME	STOP TIME	TOTAL TIME X	LITERS /MIN.	TOTAL VOLUME	AREA SQUARE FT	
3437	Stucco							
38	Smooth Plaster							
39	12"x12" Micro-Perforated Ceiling tile							
40	12"x12" Blue speckled floor tile w/ Adhesive							
41	12"x12" Green speckled floor tile w/ Adhesive							
42	Blue Multi-Colored Carpet, Glue							
43	4" Black Covebase w/ Adhesive							
44	Not Used							
45	4" Green Covebase w/ Adhesive							
46	6" Black Covebase w/ Adhesive							
47	4" Beige Covebase w/ Adhesive							
48	Sand Plaster							
49	Vibration Reducer							
50	Duct Sealant							
51	Beige floor tile w/ Mortar							
52	4" Diameter Pipe Elbow							
53								
SAMPLED BY: <i>F. Rinalda</i>		DATE/TIME: <i>4/14/08</i>		RECEIVED BY: <i>[Signature]</i>		DATE/TIME: <i>4/16/08</i>		
RELINQUISHED BY: <i>[Signature]</i>		DATE/TIME: <i>4/16/08</i>		RECEIVED BY: <i>[Signature]</i>		DATE/TIME: <i>4/16/08</i>		
RELINQUISHED BY:		DATE/TIME:		RECEIVED IN LAB BY:		DATE/TIME:		

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: SMPSUP PROJECT NO.: 107-0008 PROJECT NAME: Point Duane - Bldg B "Library" TECHNICIAN: F. Pucakuba DATE: 4/19/89 PAGE: 1 of 2

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	Stucco	3437	Exterior - Library - North East Corner	Exterior walls	2200 sq. ft.	N	N
	Synthetic Plaster	3438	Speech Rm - North West Corner	Library, Text Book Rm, Speech Rm, Office, Mezzanine HALL Rm,	3500 sq. ft.	N	N
	12"x12" Micro-Perforated Ceiling tile	3439	Library office - Center	Library, office, Text Book Rm, Speech Rm	2000 sq. ft.	Y	N
	12"x12" Perforated Acoustic tile w/ Adhesive	3440	Library - 15' North of South East corner	Library,	50 sq. ft.	N	N
	12"x12" Green Gunked Acoustic tile w/ Adhesive	3441	Text Book Rm - South Center	Text Book Rm	100 sq. ft.	N	N
	Blue Multi-Colored Carpet Glue	3442	Library - 15' North of South East corner	Library, Kitchen office,	1500 sq. ft.	N	N
	4" Black Carbazone w/ Adhesive	3443	Library office - South Center	Office	10 sq. ft.	N	N
	7" Green Carbazone w/ Adhesive	3445	Text Book Rm - South Center	Text Book Rm	20 sq. ft.	N	N
	6" Black Carbazone w/ Adhesive	3446	Library - North East Corner	Library, office,	200 sq. ft.	N	N
	Stucco Surface Paper Under Stucco	Asced	Post Sampled material	Exterior walls under Stucco	2200 sq. ft.	N	N

We're merging with

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: SMAUSO PROJECT NO.: 107-0008 PROJECT NAME: Point Dume - Bldg 5 "Library"

TECHNICIAN: F. Puvion DATE: 4/14/08 PAGE: 2 of 2

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	4" Beige Covebase w/ Adhesive	3447	Speech Rm - South West Corner	Speech Rm	30 sq. ft.	P	P
	Cork board Mark2	Assumed	Dist Sampled Material	Text Book Rm	10 sq. ft.	P	P
	Chalk boards	I	I	I	10 sq. ft.	I	I
	Sand Plaster	3448	Mezz - HVAC Rm - Pull Wall Center	Mezz - HVAC Rm	200 sq. ft.	P	P
	Vibration Reduc	3449	Mezz - HVAC Rm - HVAC Unit Center	I	10 sq. ft.	P	P
	Dust Sealant	3450	Mezz - HVAC Rm - HVAC Unit Center	I	10 sq. ft.	P	P
9" x 9" w/ glass tile w/ Marble	Beige Floor tile w/ Marble	3451	Library Office - North East Corner	Office - Under Carpet	120 sq. ft.	P	P
	4" Pinkish Paper Elbow (On Elongated T.S.I.)	3452	Mezz - HVAC Rm - West Corner	Mezz - HVAC Rm	2 Elbows	P	P
	Acoustical Plank Ceiling	Previously sampled	# 3494	Above Ceiling tile Rm: Library, office, Text Book Rm, Speech Rm	2000 sq. ft.	P	P
	Ceramic tile Mark2	I	# 3495	I	I	I	I

Note: Windows consist of Metal Framing No tetter observed



Please Reply To:

AmeriSci Los Angeles

24416 S. Main Street, Ste 308

Carson, California 90745

TEL: (310) 834-4818 • FAX: (310) 834-4772

FACSIMILE TELECOPY TRANSMISSION

To: C. Ruvalcaba
CTL Environmental Services
Fax #: (310) 530-0792

From: Olga K. Katsuk
AmeriSci Job #: 908041347
Subject: PLM 4 Hour Results
Client Project: 107-0018; Point Dume Bldg. C

Email:

Date: Friday, April 18, 2008

Time: 11:12:20

Comments:

Number of Pages: 7
(including cover sheet)

CONFIDENTIALITY NOTICE: Unless otherwise indicated, the information contained in this communication is confidential information intended for use of the individual named above. If the reader of this communication is not the intended recipient, you are hereby notified that any dissemination, distribution or copying of this communication is prohibited. If you have received this communication in error, please immediately notify the sender by telephone and return the original message to the above address via the US Postal Service at our expense. Preliminary data reported here will be verified before final report is issued. Samples are disposed of in 60 days or unless otherwise instructed by the protocol or special instructions in writing. Thank you.

Certified Analysis Service 24 Hours A Day • 7 Days A Week Competitive Prices
visit our web site - www.amerisci.com

Boston • Los Angeles • New York • Richmond

**AmeriSci Los Angeles**

24416 S. Main Street, Ste 308

Carson, California 90745

TEL: (310) 834-4861 • FAX: (310) 834-4772

PLM Bulk Asbestos Report

CTL Environmental Services

Attn: C. Ruvalcaba

24404 S. Vermont Ave.

Suite 307

Harbor City, CA 90710

Date Received 04/16/08**Date Examined** 04/18/08**AmeriSci Job #** 908041347**P.O. #** 12389**Page** 1 of 5**RE:** 107-0008; Point Dume Bldg. C

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3453 Location: Stucco	908041347-01	No	NAD (by CVES) by Olga K. Katsuk on 04/18/08
Analyst Description: Grey, Homogeneous, Non-Fibrous, Bulk Material			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3454 Location: Smooth Plaster Sand Plaster	908041347-02	Yes	Trace (<1 %) (by CVES) by Olga K. Katsuk on 04/18/08
Analyst Description: Beige/Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material			
Asbestos Types: Chrysotile <1. %			
Other Material: Non-fibrous 100 %			
3455 Location: Sand Plaster	908041347-03	Yes	Trace (<1 %) (by CVES) by Olga K. Katsuk on 04/18/08
Analyst Description: Beige/Grey, Heterogeneous, Fibrous, Bulk Material			
Asbestos Types: Chrysotile <1. %			
Other Material: Non-fibrous 100 %			
3456 Location: 12" X 12" Micro-P. Ceiling Tile	908041347-04	No	NAD (by CVES) by Olga K. Katsuk on 04/18/08
Analyst Description: Dark Brown, Heterogeneous, Fibrous, Bulk Material			
Asbestos Types:			
Other Material: Cellulose 90 %, Non-fibrous 10 %			
3457 Location: 12" X 12" Blue Speckled Floor Tile W/Adhesive	908041347-05L1	No	NAD (by CVES) by Olga K. Katsuk on 04/18/08
Analyst Description: Blue, Homogeneous, Non-Fibrous, Flooring			
Asbestos Types:			
Other Material: Non-fibrous 100 %			

See Reporting notes on last page

AmeriSci Job #: 908041347

Client Name: CTL Environmental Services

Page 2 of 5

PLM Bulk Asbestos Report

107-0008; Point Dume Bldg. C

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3457	908041347-05L2	No	NAD
Location: 12" X 12" Blue Speckled Floor Tile W/Adhesive			(by CVES) by Olga K. Katsuk on 04/18/08
Analyst Description: Clear, Homogeneous, Non-Fibrous, Mastic			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3458	908041347-06L1	Yes	6 %
Location: 9" X 9" Beige W/White Streaks Floor Tile W/Adhesive			(by CVES) by Olga K. Katsuk on 04/18/08
Analyst Description: Beige, Heterogeneous, Fibrous, Flooring			
Asbestos Types: Chrysotile 6.0 %			
Other Material: Non-fibrous 94 %			
3458	908041347-06L2	Yes	4 %
Location: 9" X 9" Beige W/White Streaks Floor Tile W/Adhesive			(by CVES) by Olga K. Katsuk on 04/18/08
Analyst Description: Black, Heterogeneous, Fibrous, Mastic			
Asbestos Types: Chrysotile 2.0 %, Anthophyllite 2.0 %			
Other Material: Non-fibrous 96 %			
3459	908041347-07L1	No	NAD
Location: 12" X 12" Beige W/Dk. Brown Speckled Floor Tile W/Adhesive			(by CVES) by Olga K. Katsuk on 04/18/08
Analyst Description: Beige/Brown, Heterogeneous, Fibrous, Flooring			
Asbestos Types:			
Other Material: Cellulose 10 %, Non-fibrous 90 %			
3459	908041347-07L2	Yes	2 %
Location: 12" X 12" Beige W/Dk. Brown Speckled Floor Tile W/Adhesive			(by CVES) by Olga K. Katsuk on 04/18/08
Analyst Description: Yellow/Black, Heterogeneous, Fibrous, Mastic			
Asbestos Types: Chrysotile 2.0 %			
Other Material: Non-fibrous 98 %			
3460	908041347-08L1	Yes	10 %
Location: Brown Pebble Pattern Sheet Vinyl Flooring			(by CVES) by Olga K. Katsuk on 04/18/08
Analyst Description: Brown, Heterogeneous, Fibrous, Flooring			
Asbestos Types: Chrysotile 10.0 %			
Other Material: Non-fibrous 90 %			

AmeriSci Job #: 908041347

Client Name: CTL Environmental Services

Page 3 of 5

PLM Bulk Asbestos Report

107-0008; Point Dume Bldg. C

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3460 Location: Brown Pebble Pattern Sheet Vinyl Flooring Analyst Description: Yellow, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Non-fibrous 100 %	908041347-08L2	No	NAD (by CVES) by Olga K. Katsuk on 04/18/08
3461 Location: 12" X 12" Grey Speckled Floor Tile W/Adhesive Analyst Description: Grey, Homogeneous, Non-Fibrous, Flooring Asbestos Types: Other Material: Non-fibrous 100 %	908041347-09L1	No	NAD (by CVES) by Olga K. Katsuk on 04/18/08
3461 Location: 12" X 12" Grey Speckled Floor Tile W/Adhesive Analyst Description: Black/Yellow, Heterogeneous, Fibrous, Mastic Asbestos Types: Chrysotile 3.0 % Other Material: Non-fibrous 97 %	908041347-09L2	Yes	3 % (by CVES) by Olga K. Katsuk on 04/18/08
3462 Location: 12" X 12" Wood P. Floor Tile W/Mastic Analyst Description: Brown, Homogeneous, Non-Fibrous, Flooring Asbestos Types: Other Material: Non-fibrous 100 %	908041347-10L1	No	NAD (by CVES) by Olga K. Katsuk on 04/18/08
3462 Location: 12" X 12" Wood P. Floor Tile W/Mastic Analyst Description: Black/Cream, Heterogeneous, Fibrous, Mastic Asbestos Types: Chrysotile 3.0 % Other Material: Non-fibrous 97 %	908041347-10L2	Yes	3 % (by CVES) by Olga K. Katsuk on 04/18/08
3463 Location: 4" T. Covebase W/Adhesive Analyst Description: Grey, Homogeneous, Non-Fibrous, Basecove Asbestos Types: Other Material: Non-fibrous 100 %	908041347-11L1	No	NAD (by CVES) by Olga K. Katsuk on 04/18/08

AmeriSci Job #: 908041347

Client Name: CTL Environmental Services

Page 4 of 5

PLM Bulk Asbestos Report

107-0008; Point Dume Bldg. C

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3463 Location: 4" T. Covebase W/Adhesive Analyst Description: Off-White, Homogeneous, Non-Fibrous, Glue Asbestos Types: Other Material: Non-fibrous 100 %	908041347-11L2	No	NAD (by CVES) by Olga K. Katsuk on 04/18/08
3464 Location: 4" Grey Covebase W/Adhesive Analyst Description: Grey, Homogeneous, Non-Fibrous, Basecove Asbestos Types: Other Material: Non-fibrous 100 %	908041347-12L1	No	NAD (by CVES) by Olga K. Katsuk on 04/18/08
3464 Location: 4" Grey Covebase W/Adhesive Analyst Description: Off-White, Homogeneous, Non-Fibrous, Glue Asbestos Types: Other Material: Non-fibrous 100 %	908041347-12L2	No	NAD (by CVES) by Olga K. Katsuk on 04/18/08
3465 Location: 4" Beige Covebase W/Adhesive Analyst Description: Beige, Homogeneous, Non-Fibrous, Basecove Asbestos Types: Other Material: Non-fibrous 100 %	908041347-13L1	No	NAD (by CVES) by Olga K. Katsuk on 04/18/08
3465 Location: 4" Beige Covebase W/Adhesive Analyst Description: Brown, Heterogeneous, Fibrous, Mastic Asbestos Types: Anthophyllite 2.0 % Other Material: Non-fibrous 98 %	908041347-13L2	Yes	2 % (by CVES) by Olga K. Katsuk on 04/18/08
3466 Location: 4" Brown Covebase W/Adhesive Analyst Description: Brown, Homogeneous, Non-Fibrous, Basecove Asbestos Types: Other Material: Non-fibrous 100 %	908041347-14L1	No	NAD (by CVES) by Olga K. Katsuk on 04/18/08

See Reporting notes on last page

AmeriSci Job #: 908041347

Client Name: CTL Environmental Services



Page 5 of 5

PLM Bulk Asbestos Report

107-0008; Point Dume Bldg. C

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3466 Location: 4" Brown Covebase W/Adhesive Analyst Description: Yellow, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Non-fibrous 100 %	908041347-14L2	No	NAD (by CVES) by Olga K. Katsuk on 04/18/08
3467 Location: 2" X 4" Fissured Ceiling Panels Analyst Description: Grey, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 40 %, Non-fibrous 60 %	908041347-15	No	NAD (by CVES) by Olga K. Katsuk on 04/18/08
3468 Location: Door Insulation Analyst Description: White, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Chrysotile 10.0 %, Amosite 5.0 % Other Material: Non-fibrous 85 %	908041347-16	Yes	15 % (by CVES) by Olga K. Katsuk on 04/18/08

Reporting Notes:

Analyzed By: Olga K. Katsuk ; Date Analyzed: 4/18/2008 4/18/08
 *NAD = no asbestos detected; Detection Limit <1%; Reporting Limits: CVES = 1%, 400 Pt Ct = 0.25%, 1000 Pt Ct = 0.1%; NA = not analyzed; NA/PS = not analyzed / positive stop; NVA = No Visible Asbestos; PLM (polarized light microscopy) Bulk Asbestos Analysis by EPA 600/M4-82-020 per 40 CFR 763 (NVLAP Lab #200346-0, CA ELAP lab #2322); Note: PLM is not consistently reliable in detecting asbestos in floor coverings and similar NOB materials. TEM is currently the only method that can be used to determine if this material can be considered or treated as non-asbestos-containing in New York State (also see EPA Advisory for floor tile, FR 59, 146, 38970, 8/1/94). NIST Accreditation requirements mandate that this report must not be reproduced except in full with the approval of the laboratory. This PLM report relates ONLY to the items tested.
 Reviewed By:  4/18/08



Asbestos, Lead Analysis Chain of Custody

AMERISCI JOB #:

908041347

AMERISCI LOS ANGELES

24416 S Main St. Suite 308

Carson, CA 90745

Phone (310) 834-4868

Fax (310) 834-4772

COMPANY: CTL		ADDRESS:				P.O.#: 32389	
PROJECT INFORMATION		ANALYSIS TYPE	TURNAROUND TIME				AIR FILTER INFORMATION:
			RUSH	24 HR	48 HR	72 HR	
JOB NAME: Paint Room - Bldg C		ASBESTOS TEM AHERA					MCE
JOB NUMBER: 107-0008		ASBESTOS PLM BULK					PC
JOB MANAGER: C. Purnell		ASBESTOS PCM AIR					25 mm
JOB DESCRIPTION:		ASBESTOS PLM 1000 P.C.					37 mm
		LEAD AIR					0.45 um
		LEAD WIPE					0.80 um
		LEAD PAINT / SOLID					TEMP:
		OTHER:					OTHER:
INITIAL RESULTS DELIVERY: ☒ FAX ☐ EMAIL ☐ VERBAL ☐ MAIL ONLY						RETURN SAMPLES Yes ☐	
REPORTS TO:						PHONE:	
INVOICE TO:						FAX:	
COMMENTS:						EMAIL:	
						PAGER/CELL:	
SAMPLE ID	SAMPLE LOCATION	START TIME	STOP TIME	TOTAL TIME X	LITERS MIN.	TOTAL VOLUME	AREA SQUARE FT
3453	Stucco						
54	Smooth Plaster						
55	Sand Plaster						
56	12"x12" Micro-Perforated Ceiling Tile						
57	12"x12" Blue Speckled Floor tile w/ Adhesive						
58	9"x1" Beige w/ white streaks Floor tile w/ Adhesive						
59	12"x12" Beige w/ DK. Brown speckled Floor tile w/ Adhesive						
60	Brown Polka Dot Pattern Sheet Vinyl Flooring						
61	12"x12" Grey Speckled Floor tile w/ Adhesive						
62	12"x12" Wood Pattern Floor tile w/ Adhesive						
63	4" Tompacon Concrete w/ Adhesive						
64	4" Grey Concrete w/ Adhesive						
65	4" Beige Concrete w/ Adhesive						
66	4" Brown Concrete w/ Adhesive						
67	2'x4' Fiberglass Ceiling Panels						
68	Door Insulation						
SAMPLED BY: F. Purnell		DATE/TIME: 11/16/08		RECEIVED BY: [Signature]		DATE/TIME: 11/16/08 @ 1340	
RELINQUISHED BY: [Signature]		DATE/TIME: 11/16/08		RECEIVED BY:		DATE/TIME:	
RELINQUISHED BY:		DATE/TIME:		RECEIVED IN LAB BY:		DATE/TIME:	

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: S.M.U.S.D. PROJECT NO.: 107-0008 TECHNICIAN: F. Luvick-ba
 PROJECT NAME: Point Dumc Bldg C "Auditorium" DATE: 4/14/88
 PAGE: 1 of 2

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	Stucco	3453	Exterior Kitchen - North West Corner	Exterior Walls	30-60 sq. ft.	N	N
	Smooth Plaster	3454	Rm C1 - North West Corner	All Rls; Auditorium, Kitchen, Vestibule, Rm 19, Rm C1, C2, S2, Stage Area	5000 sq. ft.	N	N
	Sand Plaster	3455	Rm C1 - North Wall Center	Rm C1	100 sq. ft.	P	N
	12"x12" Micro Perforated Ceiling tile	3456	Auditorium - Stage Area Center	Auditorium, Stage Area, Rm 19	1700 sq. ft.	Y	N
	12"x12" Blue Speckled Floor tile w/ Adhesive	3457	Auditorium - Stage Area - South East Corner	Auditorium Stage Area	300 sq. ft.	N	N
	9"x9" Beige w/ White Grout Floor tile w/ Mortar	3458	Rm C1 - South East Corner	Rm 19, Rm C1, S2, Vestibule, Corridor	300 sq. ft.	N	N
	12"x12" Beige w/ DK. Brown Speckled Floor tile w/ Adhesive	3459	Auditorium - North East By Stage Area	Auditorium	1000 sq. ft.	N	N
	Brown Pebble Pattern Sheet Vinyl Flooring	3460	Kitchen - 12' North of South West Corner	Kitchen	400 sq. ft.	N	N
	12"x12" Grey Speckled Floor tile w/ Adhesive	3461	Kitchen - R.R. - North West Corner	Kitchen R.R.	200 sq. ft.	N	N
	12"x12" Wood Pattern Floor tile w/ Adhesive	3462	Rm 19 - North Center	Rm 19 (Patch)	20 sq. ft.	N	N

We're merging with

coffey
environments
 A Coffey International
 Limited company

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: SMMUSP PROJECT NO.: 107-008 PROJECT NAME: Point Duane - Buildings 6 "Auditorium"

TECHNICIAN: F. Ruvalcaba DATE: 4/14/98 PAGE: 2 of 2

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	4" Tongue and Groove w/ Adhesive	3463	Auditorium - Stage Area South East Corner	Stage Area, Kitchen 	40 sq. ft.	N	N
	4" Grey Concrete w/ Adhesive	3464	Kitchen - RR - North West Corner	Kitchen RR	5 sq. ft.	N	N
	4" Beige Concrete w/ Adhesive	3465	Rm C1 - South East Corner	Rm C1, S2, Stage Vestibule	50 sq. ft.	N	N
	4" Beige Concrete w/ Adhesive	3466	Auditorium - North West Corner	Auditorium	120 sq. ft.	N	N
	2'x4" Furred Ceilings Panels	3467	Rm 19 - Center	Rm 19	150 sq. ft.	N	N
	Door Insulation (Encased in Wood)	3468	Rm 19 - North West Exit Doors	Rm 19 (North West Exit Doors)	2 Doors	N	N
	Acoustical Plaster	Previously Sealed	# 3494	Auditorium Stage Area, Rm 19 (Above 12"x12" Micro Perforated Ceiling tiles)	12000 sq. ft.	N	N
	Ceramic tile Plaster		# 3495		1	N	N
	Note: Windows consist of Metal Framing			No Puffy Observed			
	 Fiber glass			Pipe Insulation observed in Ceiling Space Elbow was Not Accountable 			
	Quarrie Paper (under Shucco)	Acad		Exterior walls under Shucco	3000 sq. ft.	N	N

CTL ENVIRONMENTAL SERVICES FIELD BULK SAMPLE LIST

CLIENT: SMPHUSD PROJECT NO.: 107-0008 PROJECT NAME: Point Reyes Bldg D "Rm 10-12"

TECHNICIAN: F. Puvion DATE: 4/14/08 PAGE: 1 of 2

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	Stucco	3469	Exterior - Rm 10 - North West Corner	Exterior walls	2000 sq. ft	N	N
	Smooth Plaster	3470	Rm 11 - North East Corner	Rm 10, 10A, B, C; 11, 12	3600 sq. ft	N	N
	St. Comp	3471	Rm 10A - North East Corner	Rm 10A, B, C (walls)	300 sq. ft	N	N
		3472	Rm 10B - North East Corner				
		3473	Rm 10C - South East Corner				
	Diagonal	3474	Rm 10C - North West Corner				
	Composite - Diagonal w/ St. Comp	3475	Rm 10A - North East Corner				
	12"x12" Mosaic - Rectangular Ceiling tile	Previously sampled	# 3422	Rm 10, 10A, B, C; 11, 12	2700 sq. ft	Y	N
	12"x12" Green Speckled Floor tile w/ Mosaic	3476	Rm 10 North West Corner	Rm 10, 11, 10A, B, C	1700 sq. ft	N	N
	4"x4" Beige / White Floor tile w/ Mosaic	Previously sampled	# 3458	Rm 10 (Reinforced blocks), Rm 10 C	600 sq. ft		

CLIENT: SPMUSD
PROJECT NO.: 107-0008
PROJECT NAME: Port Dumie - Bldg D "Rm 10-12"
TECHNICIAN: F. Fuenkeba
DATE: 4/14/88
PAGE: 2 of 2

CLIENT: SPMUSD
PROJECT NO.: 107-0008
PROJECT NAME: Port Dumie - Bldg D "Rm 10-12"
TECHNICIAN: F. Fuenkeba
DATE: 4/14/88
PAGE: 2 of 2

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	12"x12" Blue Speckled floor tile w/ Adhesive	Previously Sampled	3423	Rm 12	300 sq. ft	N	N
	1" Green Carbazone w/ Adhesive	3477	Rm 10 - North Center	Rm 10	200 sq. ft	N	N
	1" Black Carbazone w/ Adhesive	3478	Rm 10 - North East Corner	Rm 10 Rm 12	100 sq. ft	N	N
	Green Carpet Adhesive			No Glue Present - Rm 10 B		N	N
under Carpet	Beige floor tile w/ Mortar	3479	Rm 10B - South East Corner	Rm 10B (Under Carpet) Rm 10 1/2 (Under Carpet) 1/2 Mortar	900 sq. ft	N	N
	Blue Paint Colored Carpet Tiles	Previously Sampled	# 3427	Rm 12	700 sq. ft	N	N
	Acoustical Plaster Ceiling		# 3494	10, 10A, B, C, 11, 12 (Above ceiling tile)	2700 sq. ft	N	old
	Ceiling tile Mortar		# 3495			N	N
	Barium Paper	Ascd	Not Sampled Material In fact	Exterior Wall Under Stairs	2000 sq. ft	N	N
	Note: no response consist of Section 15 - Exterior wall consist of Section 15 Metal Window			Frames No Putty observed			

					We're meeting with
chalk bundle	Around	Not Supplied	Moderate	Defect	Rms 11 & 12 50 ft N
Cork Board Master	↓				coffey environments 50 ft S

Note: External walls consist of Sections of Wood Siding. Put to Reveal as per Section - S.S.B.E.

A Conery International
Limited Company



Please Reply To:

AmeriSci Los Angeles

244 6 S. Main Street, Ste 308

Carson, California 90745

TEL: (310) 834-4658 • FAX: (310) 834-4772

FACSIMILE TELECOPY TRANSMISSION

To: C. Ruvalcaba
CTL Environmental Services
Fax #: (310) 530-0792

From: Paola Jucoing
AmeriSci Job #: 90804 342
Subject: PLM 3 day Results
Client Project: 107-0008; Point Dume Bldg. E

Email:

Date: Friday, April 18, 2008
Time: 11:10:07

Number of Pages: 1
(including cover sheet)

Comments:

CONFIDENTIALITY NOTICE: Unless otherwise indicated, the information contained in this communication is confidential information intended for use of the individual named above. If the reader of this communication is not the intended recipient, you are hereby notified that any dissemination, distribution or copying of this communication is prohibited. If you have received this communication in error, please immediately notify the sender by telephone and return the original message to the above address via the US Postal Service at our expense. Preliminary data reported here will be verified before final report is issued. Samples are disposed of in 60 days or unless otherwise instructed by the protocol or special instructions in writing. Thank you.

Certified Analysis Service 24 Hours A Day • 7 Days A Week Competitive Prices
visit our web site - www.amerisci.com

Boston • Los Angeles • New York • Richmond

**AmeriSci Los Angeles**

2441 E. S. Main Street, Ste 308

Carson, California 90745

TEL: (310) 834-4861 • FAX: (310) 834-4772

PLM Bulk Asbestos Report

CTL Environmental Services
Attn: C. Ruvalcaba
24404 S. Vermont Ave.
Suite 307
Harbor City, CA 90710

Date Received 04/16/08 AmeriSci Job # 908041342
Date Examined 04/18/08 P.O. # 32389
Page 1 of 2
RE: 107-0008; Point Dume Bldg. E

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3480 Location: Stucco	908041342-01	No	NAD (by CVES) by Paola Ducoing on 04/18/08
Analyst Description: Grey/Beige, Heterogeneous, Non-Fibrous, Cementitious, Stucco Asbestos Types: Other Material: Non-fibrous 100 %			
3481 Location: Smooth Plaster	908041342-02	No	NAD (by CVES) by Paola Ducoing on 04/18/08
Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Plaster Asbestos Types: Other Material: Non-fibrous 100 %			
3482 Location: Blue Multi Colored Carpet Glue	908041342-03	No	NAD (by CVES) by Paola Ducoing on 04/18/08
Analyst Description: Yellow, Homogeneous, Non-Fibrous, Glue Asbestos Types: Other Material: Synthetic fibers 4 %, Non-fibrous 96 %			
3498 Location: Beige Floor Tile W/Mastic	908041342-04L1	Yes	3 % (by CVES) by Paola Ducoing on 04/18/08
Analyst Description: Beige, Homogeneous, Non-Fibrous, Floor Tile Asbestos Types: Chrysotile 3.0 % Other Material: Non-fibrous 97 %			
3498 Location: Beige Floor Tile W/Mastic	908041342-04L2	Yes	5 % (by CVES) by Paola Ducoing on 04/18/08
Analyst Description: Black, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Chrysotile 5.0 % Other Material: Non-fibrous 95 %			


AmeriSci Job #: 908041342

Client Name: CTL Environmental Services


Page 2 of 2


PLM Bulk Asbestos Report

107-0008; Point Dume Bldg. E

Reporting Notes:Analyzed By: Paola Duccing ; Date Analyzed: 4/18/2008 4/18/08

*NAD = no asbestos detected; Detection Limit <1%; Reporting Limits: CVES = 1%, 400 Pt Ct = 0.25%, 1000 Pt Ct = 1.1%; NA = not analyzed; NA/PS = not analyzed / positive stop; NVA = No Visible Asbestos; PLM (polarized light microscopy) Bulk Asbestos Analysis by EPA 600/M4-82-020 per 40 CFR 763 (NVLAP Lab #200346-0, CA ELAP Lab #2322); Note: PLM is not consistently reliable in detecting asbestos in floor coverings and similar NOB materials. TEM is currently the only method that can be used to determine if this material can be considered or treated as non-asbestos-containing in New York State (also see EPA Advisory for floor tile, FR 59, 146, 38970, 8/1/94). NIST Accreditation requirements mandate that this report must not be reproduced except in full with the approval of the laboratory. This PLM report relates ONLY to the items tested.

Reviewed By:  4/18/08



908041342

Page 1 of 1

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: SMMUSD PROJECT NO.: 07-0008 PROJECT NAME: Point Duane - Bldg E "Rms 13-15"

TECHNICIAN: F. Funderburk DATE: 4/15/08 PAGE: 1 of 2

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	Stucco	3480	Exterior - North West corner by storage door	Exterior walls	1000 sq. ft	N	P
	Smooth plaster	3481	Storage Rm - South West corner	Storage Rm 13, 14, 15	4000 sq. ft	N	N
	1 1/2" x 12" Micro Perforated Ceiling tile	Previously sampled	# 3422	Rm 13, 14, 15	2700 sq. ft	Y	N
	12" x 12" Perforated Floor tile w/ Adhesive	I	# 3423	Rm 13, 14, 15	1500 sq. ft	N	N
	9" x 9" Beige Floor tile w/ Mortar	I	# 3458	Storage Rm	150 sq. ft	N	N
	Blue Multi-Colored Carpet glue	3482	Rm 13 - Center	Rm 13, 14, 15 (Previously sampled)	1200 sq. ft	N	N
	1" Black Carboard w/ Adhesive	Previously sampled	# 3429	Rm 13, 14, 15	360 sq. ft	N	N
	4" Beige Carboard w/ Adhesive	I	# 3447	Storage Rm	40 sq. ft	N	N
	1/2" x 12" Boards	Ass'd	Port Sample Material Subject	Rm 13, 14, 15	50 sq. ft	N	P
	Carboard Mortar	I	I	I	50 sq. ft	I	F
	Beige Floor tile w/ Mortar (under carpet)	3498	Rm 13 - Center	Rms 13, 14, 15 (under floor tile & carpet)	2700 sq. ft	N	N

CLIENT: Spartan Sp
PROJECT NO.: 107-0008
PROJECT NAME: Point Duane - Bldg E "Pm" 13-15"

8000-201
d5mhu

8000-201

13-15-11

F. Ruvalcaba

41508

of 2

[illegible]

**AmeriSci Los Angeles**

24416 SOUTH MAIN STREET • SUITE 308

CARSON, CA 90745

TEL: (310) 834-4868 • FAX: (310) 834-4772

April 22, 2008

CTL Environmental Services
Attn: C. Ruvalcaba
24404 S. Vermont Ave.
Suite 307
Harbor City, CA 90710

RE: CTL Environmental Services
Job Number 908041344
P.O. #32389
107-0008; Point Dume Bldg. F; (Report Amended 4/22/2008)

Dear C. Ruvalcaba:

Enclosed are the results for polarized light microscopy analysis (PLM) of the following CTL Environmental Services samples received at AmeriSci on Wednesday, April 16, 2008, for a 3 day turnaround:

3485, 3486

The 2 samples contained in Ziplock Bags were shipped to AmeriSci via Hand delivery. These samples were prepared and analyzed according to the EPA Interim Method (EPA 600/M4-82-020 per 40 CFR 763, subpt F, App. A). The samples were evaluated for homogeneity by low power stereomicroscopy. Asbestos fibers were identified by PLM and dispersion staining through the determination of the required optical properties including: morphology, color, pleochroism, refractive indices, birefringence, extinction and sign of elongation. The required analytical information, analysis results, analyst signature and laboratory identification is contained in the Analyst's Report.


This report relates ONLY to the sample analysis expressed as percent asbestos. The CV for this analysis is expected to range from 0.3 to 1.2, depending on the quantity of analyte present. AmeriSci assumes no responsibility for customer supplied data such as "sample type", "location", or "area sampled". This report must not be used to claim product endorsement by AmeriSci, NVLAP or any agency of the U. S. Government. The National Institute of Standards and Technology Accreditation requirements mandate that this report must not be reproduced, except in full without the written approval of the laboratory. This report may contain specific data not covered by NVLAP or ELAP accreditations respectively, if so identified in relevant footnotes.

AmeriSci appreciates this opportunity to serve your organization. Please contact us for any further assistance or with any questions.

Sincerely,

Mary S. David
Client Services Manager

Boston - Los Angeles - New York - Richmond



PLM Bulk Asbestos Report

CTL Environmental Services
Attn: C. Ruvalcaba
24404 S. Vermont Ave.
Suite 307
Harbor City, CA 90710

Date Received 04/16/08 AmeriSci Job # 908041344
Date Examined 04/18/08 P.O. # 32389
Page 1 of 1
RE: 107-0008; Point Dume Bldg. F; (Report Amended 4/22/2008)

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3485 Location: Stucco	908041344-01	Yes	Trace (<1 %) (by CVES) by Paola Ducoing on 04/18/08
Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Stucco Asbestos Types: Chrysotile <1. % Other Material: Non-fibrous 100 %			
3486 Location: Smooth Plaster	908041344-02	No	NAD (by CVES) by Paola Ducoing on 04/18/08
Analyst Description: Beige, Homogeneous, Non-Fibrous, Plaster Asbestos Types: Other Material: Cellulose 5 %, Non-fibrous 95 %			

Reporting Notes:

Analyzed By: Paola Ducoing (MD) Date Analyzed: 4/18/2008 4/22/2008
 *NAD = no asbestos detected; Detection Limit: 1 %; Reporting Limits: CVES = 1%, 400 Pt Ct = 0.25%, 1000 Pt Ct = 0.1%; NA = not analyzed; NA/PS = not analyzed / positive stop; NVA = No Visible Asbestos; PLM (polarized light microscopy) Bulk Asbestos Analysis by EPA 600/M4-82-020 per 40 CFR 763 (NVLAP Lab #200346-0, CA ELAP lab #2322); Note: PLM is not consistently reliable in detecting asbestos in floor coverings and similar NOB materials. TEM is currently the only method that can be used to determine if this material can be considered or treated as non-asbestos-containing in New York State (also see EPA Advisory for floor tile, FR 59, 146, 38970, 8/1/94). NIST Accreditation requirements mandate that this report must not be reproduced except in full with the approval of the laboratory. This PLM report relates ONLY to the items tested.

Reviewed By: Gerald R. Bussing

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: SMITHSONIAN PROJECT NO: 107-0008 PROJECT NAME: Point Name- Bldg F "Rms 16-18"

TECHNICIAN: T. Ruvalcaba DATE: 4/5/08 PAGE: 1 of 2

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	Stucco	3485	Exterior Rm 18 North Exterior Corner	Exterior walls	400 sq. ft.	N	N
	Smooth Plaster	3486	Rm 16 - Exit Gate	Rms 16, 17, 18	1800 sq. ft.	N	N
	12" x 12" Micro-Perforated Ceiling tile	Remainder sample	# 3422	Rms 16, 17, 18	2700 sq. ft.	Y	N
	12" x 12" Blue Speckled Floor tile w/ Adhesive		# 3423	Rms 16, 17, 18	700 sq. ft.	N	N
	Blue Multi-Colored Carpet Glue		# 3482	Rms 16, 17, 18 (Room 16 only)	8500 sq. ft.	N	N
	4" Black Lath w/ Adhesive		# 3429	Rms 16, 17, 18	350 sq. ft.	N	N
	Chalk boards	Remainder sample	Not Sampled plaster Substrate	Rms 16, 17, 18	850 sq. ft.	N	N
	Cork board Mortar				50 sq. ft.	N	N
*	Acoustic Plaster Ceiling	Remainder sample	# 3494	Rms 16, 17, 18 (Above ceiling tile)	2700 sq. ft.	N	N
	Ceiling tile Mortar		# 3495			N	N

Note: Windows frames consist of metal, no putty observed

- Exterior walls consist of Section: of Aluminum Panels on plaster. Upon inspection the area is in excess of 66 for inspection
- Exterior walls should be further inspected for below the floor
- Exterior walls are predominantly mainly cement

* - Cement Above Ceiling tile

The logo for AmeriSci, featuring the company name in a bold, sans-serif font. Above the name is a stylized, curved line that arches over the letters, resembling a swoosh or a partial circle.

Please Reply To:

AmeriSci Los Angeles

24416 S. Main Street, Ste 308

Carson, California 90745

TEL: (310) 834-4668 • FAX: (310) 834-4772

FACSIMILE TELECOPY TRANSMISSION

To: C. Ruvalcaba
CTL Environmental Services
Fax #: (310) 530-0792

From: Paola Ducoing
AmeriSci Job #: 90804.346
Subject: PLM 1 day Results
Client Project: 107-0108; Point Dume Bldg.G

Email:

Date: Friday, April 18, 2008
Time: 10:58:19

Number of Pages:

3
(including cover sheet)

Comments:

CONFIDENTIALITY NOTICE: Unless otherwise indicated, the information contained in this communication is confidential information intended for use of the individual named above. If the reader of this communication is not the intended recipient, you are hereby notified that any dissemination, distribution or copying of this communication is prohibited. If you have received this communication in error, please immediately notify the sender by telephone and return the original message to the above address via the US Postal Service at our expense. Preliminary data reported here will be verified before final report is issued. Samples are disposed of in 60 days or unless otherwise instructed by the protocol or special instructions in writing. Thank you.

Certified Analysis Service 24 Hours A Day • 7 Days A Week Competitive Prices
visit our web site - www.amerisci.com

Boston • Los Angeles • New York • Richmond

**AmeriSci Los Angeles**

24411 S. Main Street, Ste 308

Carson, California 90745

TEL: (310) 834-4868 • FAX: (310) 834-4772

PLM Bulk Asbestos Report

CTL Environmental Services

Attn: C. Ruvalcaba

24404 S. Vermont Ave.

Suite 307

Harbor City, CA 90710

Date Received 04/16/08

Date Examined 04/18/08

AmeriSci Job # 908041346

P.O. # 32389

Page 1 of 1

RE: 107-0008; Point Dume Bldg.G

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3483 Location: Stucco	908041346-01	Yes	Trace (<1 %) (by CVES) by Paola Ducoing on 04/18/08
Analyst Description: Light Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Chrysotile <1, % Other Material: Non-fibrous 100 %			
3484 Location: Smooth Plaster	908041346-02	No	NAD (by CVES) by Paola Ducoing on 04/18/08
Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Plaster Asbestos Types: Other Material: Non-fibrous 100 %			

Reporting Notes:

Analyzed By: Paola Ducoing

Date Analyzed: 4/18/2008

4/18/08

*NAD = no asbestos detected; Detection Limit <1%; Reporting Limits: CVES = 1%, 400 Pt Ct = 0.25%, 1000 Pt Ct = 1.1%; NA = not analyzed; NA/PS = not analyzed / positive stop; NVA = No Visible Asbestos; PLM (polarized light microscopy) Bulk Asbestos Analysis by EPA 600/M4-82-020 per 40 CFR 763 (NVLAP Lab #200346-0, CA ELAP Lab #2322); Note: PLM is not consistently reliable in detecting asbestos in floor coverings and similar NOB materials. TEM is currently the only method that can be used to determine if this material can be considered or treated as non-asbestos-containing in New York State (also see EPA Advisory for floor tile, FR 59, 146, 36970, 8/1/94). NIST Accreditation requirements mandate that this report must not be reproduced except in full with the approval of the laboratory. This PLM report relates ONLY to the items tested.

Reviewed By:



Asbestos, Lead Analysis Chain of Custody

AMERISCI JOB #:

908041345

AMERISCI LOS ANGELES

24416 S Main St. Suite 308

Carson, CA 90745

Phone (310) 834-4868

Fax (310) 834-4772

[illegible]

CTL ENVIRONMENTAL SERVICES FIELD BULK SAMPLE LIST

CLIENT: SMALLWOOD PROJECT NO.: 107-0008 PROJECT NAME: Point Anne - Bldg G "Pns 3-6"

TECHNICIAN: F. Runkle DATE: 4/15/08 PAGE: 1 of 2

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	Stucco	3483	Exterior - By Entry to Pn 5	Exterior walls	1000 sq. ft	N	N
	Smooth Plaster	3484	Pn 4 - North End Corner	Pn 3, 4, 5, 6	5000 sq. ft	N	N
	12" x 12" Micro-Polished Ceiling tile	Previously Sampled	# 3422	Pn 3, 4, 5, 6	3600 sq. ft	Y	N
	12" x 12" Blue Speckled Floor tile w/adhesive		# 3423		1100 sq. ft	N	N
	Blue Multi-Colored Carpet tile		# 3482		2500 sq. ft		
	4" Black Lumber w/adhesive		# 3429		480 lin. ft		
	Chalkboards	Asnd	Dist Sampled Material		60 sq. ft		
	Cracked Mortar		Extract		60 sq. ft		
	Beige Floor tile w/Mastic (under Carpet & Plaster)	Previously Sampled	# 3479	(under Floor tile & Carpet)	3600 sq. ft		
	Acoustical Plaster Ceiling		# 3494	Pn 3, 4, 5, 6 (Above Ceiling tile)	3600 sq. ft		

We're meeting with

CLIENT: Suburp
PROJECT NO.: 107-0008
PROJECT NAME: Point Dumc- Bldg 6 "Pac 3-6"

Summary

107-008

Point Dumc - Bldg G "Rm 3-6"

Date: 4/15/08

2 of 2

12



AmeriSci Los Angeles

24416 SOUTH MAIN STREET • SUITE 308

CARSON, CA 90745

TEL: (310) 834-4868 • FAX: (310) 834-4772

April 17, 2008

CTL Environmental Services

Attn: C. Ruvalcaba

24404 S. Vermont Ave.

Suite 307

Harbor City, CA 90710

RE: CTL Environmental Services

Job Number 908041345

P.O. #32389

107-0008; Point Dume Bldg. H

Dear C. Ruvalcaba:

Enclosed are the results for polarized light microscopy analysis (PLM) of the following CTL Environmental Services samples received at AmeriSci on Wednesday, April 16, 2008, for a 48 hour turnaround:

3487, 3488, 3489, 3490, 3491, 3492, 3493

The 7 samples contained in Ziplock Bags were shipped to AmeriSci via Hand delivery. These samples were prepared and analyzed according to the EPA Interim Method (EPA 600/M4-82-020 per 40 CFR 763, subpt F, App. A). The samples were evaluated for homogeneity by low power stereomicroscopy. Asbestos fibers were identified by PLM and dispersion staining through the determination of the required optical properties including: morphology, color, pleochroism, refractive indices, birefringence, extinction and sign of elongation. The required analytical information, analysis results, analyst signature and laboratory identification is contained in the Analyst's Report.

This report relates ONLY to the sample analysis expressed as percent asbestos. The CV for this analysis is expected to range from 0.3 to 1.2, depending on the quantity of analyte present. AmeriSci assumes no responsibility for customer supplied data such as "sample type", "location", or "area sampled". This report must not be used to claim product endorsement by AmeriSci, NVLAP or any agency of the U. S. Government. The National Institute of Standards and Technology Accreditation requirements mandate that this report must not be reproduced, except in full without the written approval of the laboratory. This report may contain specific data not covered by NVLAP or ELAP accreditations respectively, if so identified in relevant footnotes.


AmeriSci appreciates this opportunity to serve your organization. Please contact us for any further assistance or with any questions.

Sincerely,

A handwritten signature in black ink, appearing to read "Mary S. David".

Mary S. David
Client Services Manager

Boston - Los Angeles - New York - Richmond



**AmeriSci Los Angeles**

24416 S. Main Street, Ste 308

Carson, California 90745

TEL: (310) 834-4868 • FAX: (310) 834-4772

PLM Bulk Asbestos Report

CTL Environmental Services

Attn: C. Ruvalcaba

24404 S. Vermont Ave.

Suite 307

Harbor City, CA 90710

Date Received 04/16/08**Date Examined** 04/17/08**AmeriSci Job #** 908041345**P.O. #** 32389**Page** 1 **of** 2**RE:** 107-0008; Point Dume Bldg. H

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3487 Location: Stucco	908041345-01	No	NAD (by CVES) by Paola Ducoing on 04/17/08
Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Stucco Asbestos Types: Other Material: Non-fibrous 100 %			
3488 Location: Smooth Plaster	908041345-02	No	NAD (by CVES) by Paola Ducoing on 04/17/08
Analyst Description: Off-White, Heterogeneous, Non-Fibrous, Cementitious, Plaster Asbestos Types: Other Material: Non-fibrous 100 %			
3489 Location: Sand Plaster	908041345-03	No	NAD (by CVES) by Paola Ducoing on 04/17/08
Analyst Description: Off-White, Heterogeneous, Non-Fibrous, Cementitious, Plaster Asbestos Types: Other Material: Non-fibrous 100 %			
3490 Location: Lt. Grey S. Pattern Sheet vinyl Floors	908041345-04	No	NAD (by CVES) by Paola Ducoing on 04/17/08
Analyst Description: White, Homogeneous, Non-Fibrous, Vinyl Flooring Asbestos Types: Other Material: Non-fibrous 100 %			
3491 Location: Stucco	908041345-05	No	NAD (by CVES) by Paola Ducoing on 04/17/08
Analyst Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Stucco Asbestos Types: Other Material: Non-fibrous 100 %			

Client Name: CTL Environmental Services

PLM Bulk Asbestos Report

107-0008; Point Dume Bldg. H

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
3492	908041345-06	No	NAD
Location: Smooth Plaster			(by CVES) by Paola Ducoing on 04/17/08
Analyst Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Plaster			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
3493	908041345-07	Yes	8 %
Location: 4" D. Pipe Insulation Elbow			(by CVES) by Paola Ducoing on 04/17/08
Analyst Description: Beige, Heterogeneous, Fibrous, Pipe Insulation			
Asbestos Types: Chrysotile 8.0 %			
Other Material: Cellulose 15 %, Fibrous glass 10 %, Non-fibrous 77 %			

Reporting Notes:

Analyzed By: Paola Ducoing; Date Analyzed: 4/17/2008

*NAD = no asbestos detected; Detection Limit <1%; Reporting Limits: CVES = 1%, 400 Pt Ct = 0.25%, 1000 Pt Ct = 0.1%; NA = not analyzed; NA/PS = not analyzed / positive stop; NVA = No Visible Asbestos; PLM (polarized light microscopy) Bulk Asbestos Analysis by EPA 600/M4-82-020 per 40 CFR 763 (NVLAP Lab #200346-0, CA ELAP lab #2322); Note: PLM is not consistently reliable in detecting asbestos in floor coverings and similar NOB materials. TEM is currently the only method that can be used to determine if this material can be considered or treated as non-asbestos-containing in New York State (also see EPA Advisory for floor tile, FR 59, 146, 38970, 8/1/94). NIST Accreditation requirements mandate that this report must not be reproduced except in full with the approval of the laboratory. This PLM report relates ONLY to the items tested.

Reviewed By:

CLIENT: S.M.M.W.D.
PROJECT NO.: 107-0008
PROJECT NAME: Cont. Drive - Bldg. first floor Bldg
TECHNICIAN: F. Kwan
DATE: 4/15/08
PAGE: 1 of 1

We're merging with
coffey 
environments

A Coffey International
Limited company

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: SHUMUSO PROJECT NO.: 107-0008 PROJECT NAME: Point Duane - Bldg 4 "Bus 7-9" & Point Duane Dr (C)

TECHNICIAN: F. Lumbumba DATE: 4/15/08 PAGE: 1 of 2

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	Stucco	3487	Exterior - to Bus 7-9 - North East Corner	Exterior walls	500 sq. ft.	1	1
	Smooth Plaster	3488	Room 7 - East Center	Room 7, 8, 9	2000 sq. ft.		
	Sand Plaster	3489	Room 1 - North wall Center	Room 1, 2, 3, 4	900 sq. ft.		
	12" x 12" Micro Perforated Ceiling tile	Previously Sampled	# 3422	Room 7, 8, 9	2700 sq. ft.		
	12" x 12" Blue Speckled Floor tile w/ Adhesive		# 3423		1100 sq. ft.		
	Blue Multi Colored Carpet Glue		# 3424		2500 sq. ft.		
	H. Grey Sq. Pattern Sheet Vinyl Flooring	3490	Room 9 - Center	(Kadich)	300 sq. ft.		
	Cork board Mastic	Ass-b	Not Sampled Material		70 sq. ft.		
	Chalk boards		Extract		70 sq. ft.		
	1/2" Black Laminar w/ Adhesive	Previously Sampled	# 3429		360 sq. ft.		

CLIENT: SMITHSON
PROJECT NO.: 107-0008
PROJECT NAME: Cent Name - Gldg H "P-7-8"

CLIENT: SMVMS

PROJECT NO.:

107-0008

PROJECT NAME: bird name: Bida H "B-7-9"

Technician: F. Ruvalcaba

Date: 4/15/08

Page: 2 of 2

[illegible]


ਪੰਜਾਬ ਫਿਲਮ ਫੈਸਟੀਵਲ



environments
A Coffey International
Limited company

APPENDIX C

SAMPLE LOCATIONS

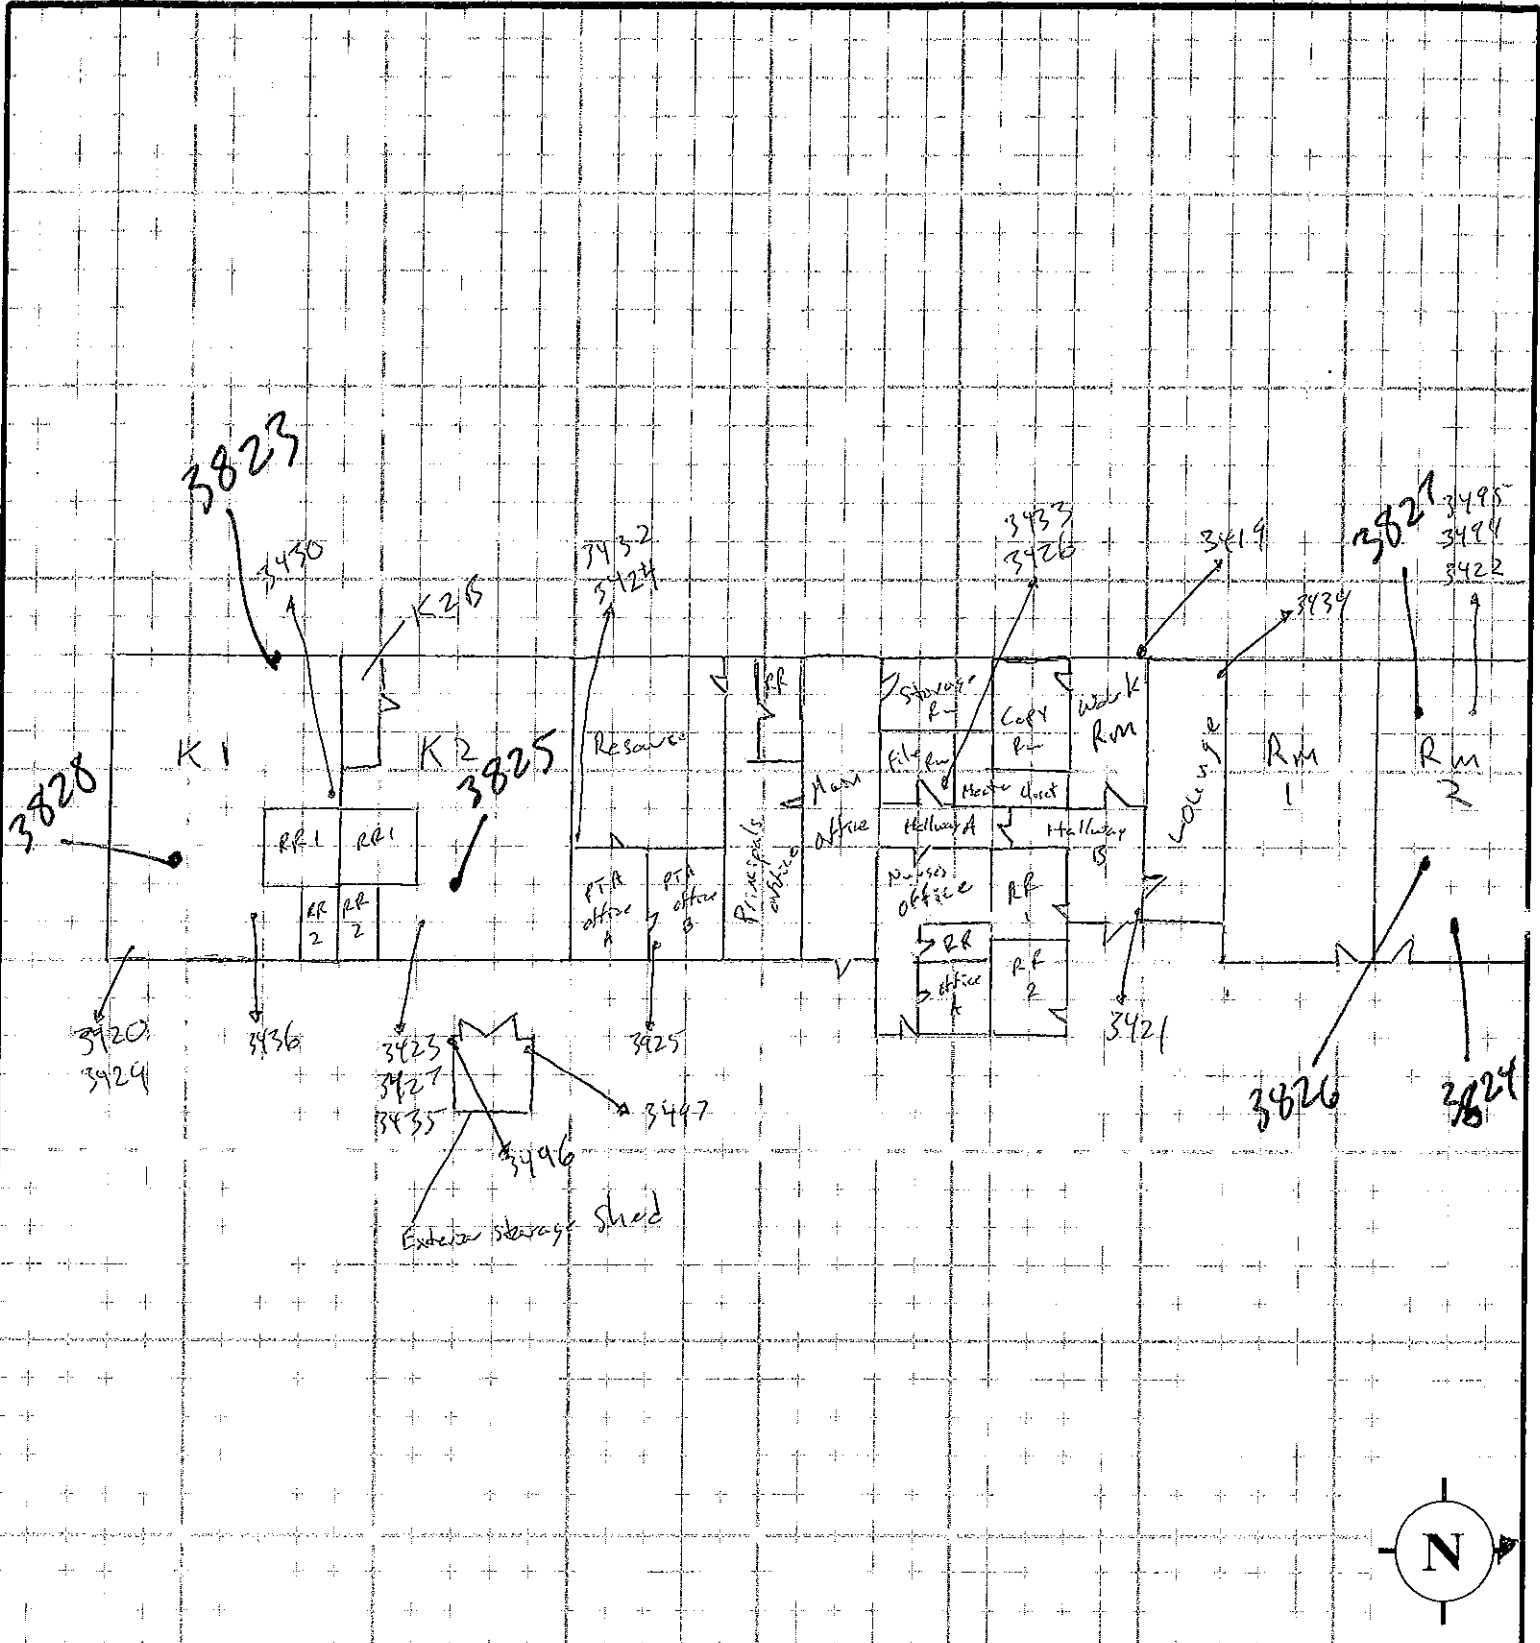


DESCRIPTION: Bulk Sample		
JOB NAME: Point Dume - Bldg A "Main Office"		
JOB NO: 107-0008	DATE: 4/14/08	SCALE: NTS
DRAW BY: F. Ruvalcaba	SKETCH:	PAGE 1 OF 1

CTL Environmental Services

We're merging with

coffey
environments

A Coffey International Limited Company

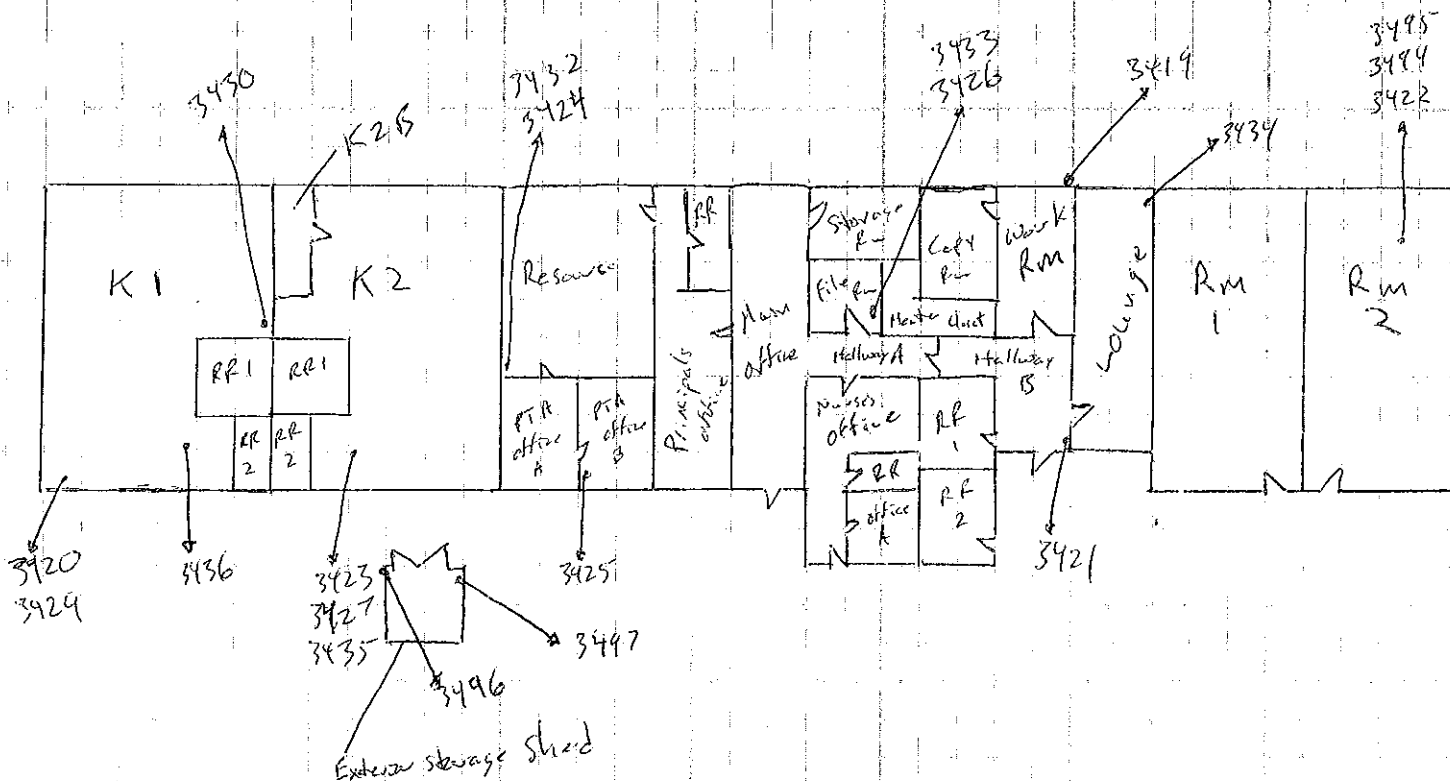

DESCRIPTION:

Bulk Sample

JOB NAME:

Point Dume - Bldg A "Main Office"

JOB NO:

107-0008

DATE:

4/19/08

SCALE:

NTS

DRAW BY:

F. Ruvalcaba

SKETCH:

PAGE 1 OF 1





CTL Environmental Services

We're merging with

coffey
environments

A Coffey International
Limited Company

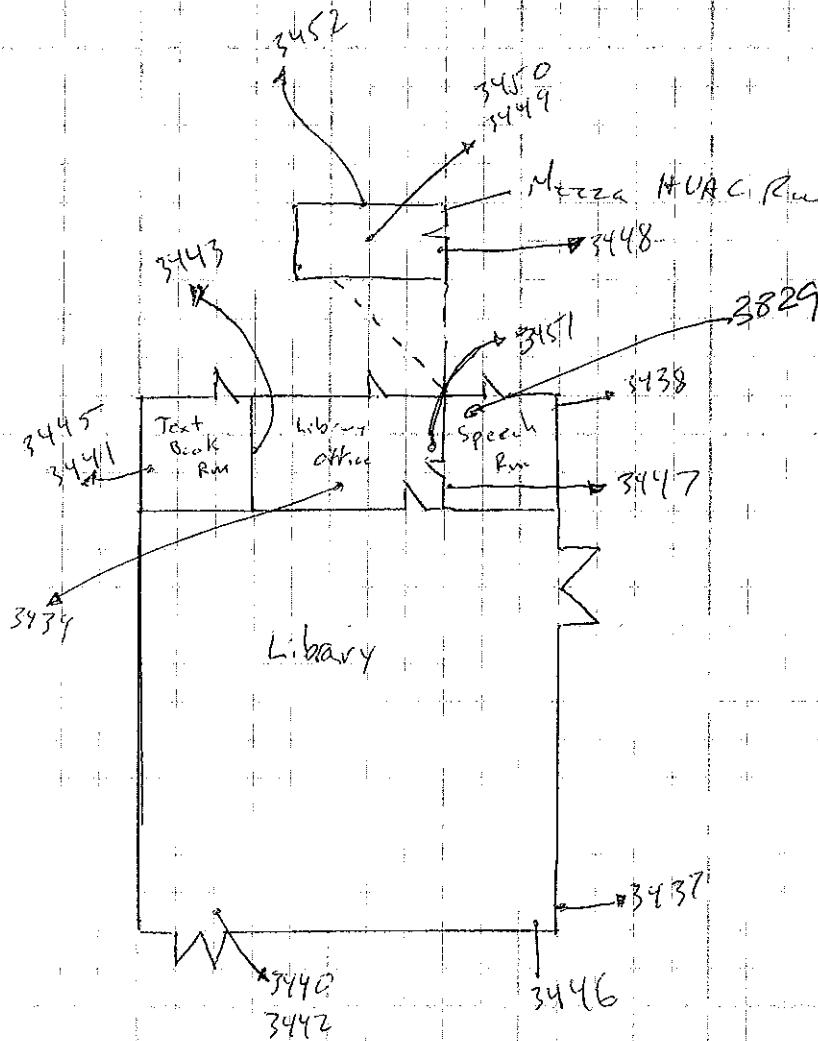

DESCRIPTION:

Bulk Sample Map

JOB NAME:

Point Name - Bldg B "Library"

JOB NO:

107-0008

DATE:

4/14/08

SCALE:

NTS

DRAW BY:

F. Rueda-Cabrera

SKETCH:

PAGE (OF)





CTL Environmental Services

We're merging with

coffey
environments

A Coffey International
Limited Company

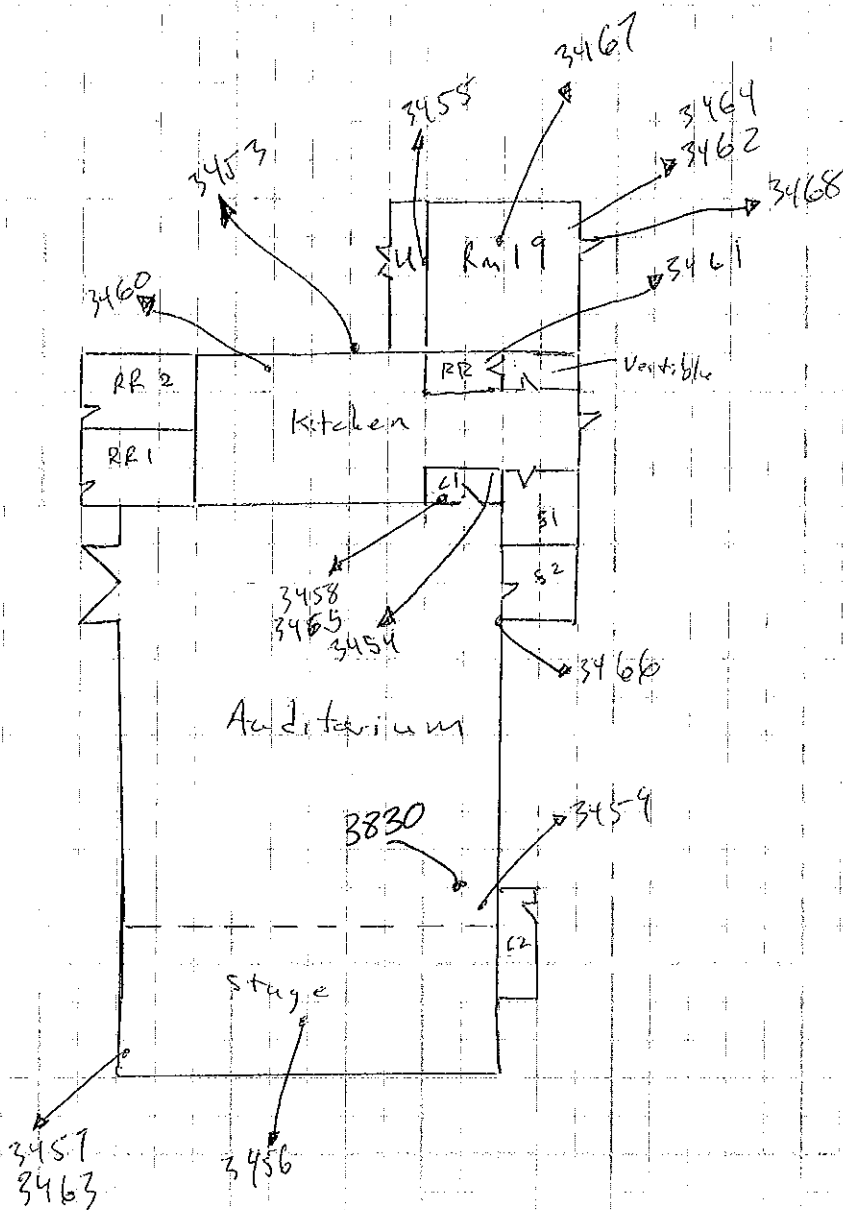

DESCRIPTION:

Bulk Sample Map

JOB NAME:

Point Dume - Bldg C - "Auditorium"

JOB NO:

107-0008

DATE:

4/14/08

SCALE:

NTS

DRAW BY:

F. Ruvalcaba

SKETCH:

PAGE (OF)





CTL Environmental Services

We're merging with

coffey
environments

A Coffey International
Limited Company

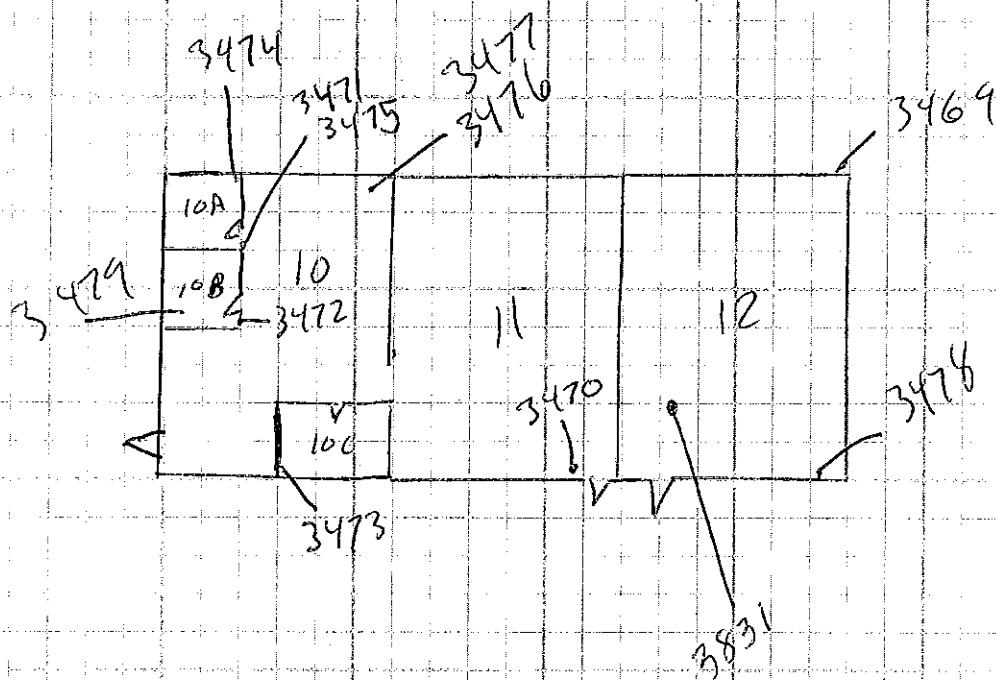

DESCRIPTION:

Bulk Sample Map

JOB NAME:

Cont Range - Bldg D

JOB NO:

102-0008

DATE:

5/14/08

SCALE:

PTS

DRAWN BY:

f. fuvetala

SKETCH:

PAGE (OF 1





CTL Environmental Services

We're merging with

coffey
environments

A Coffey International
Limited Company

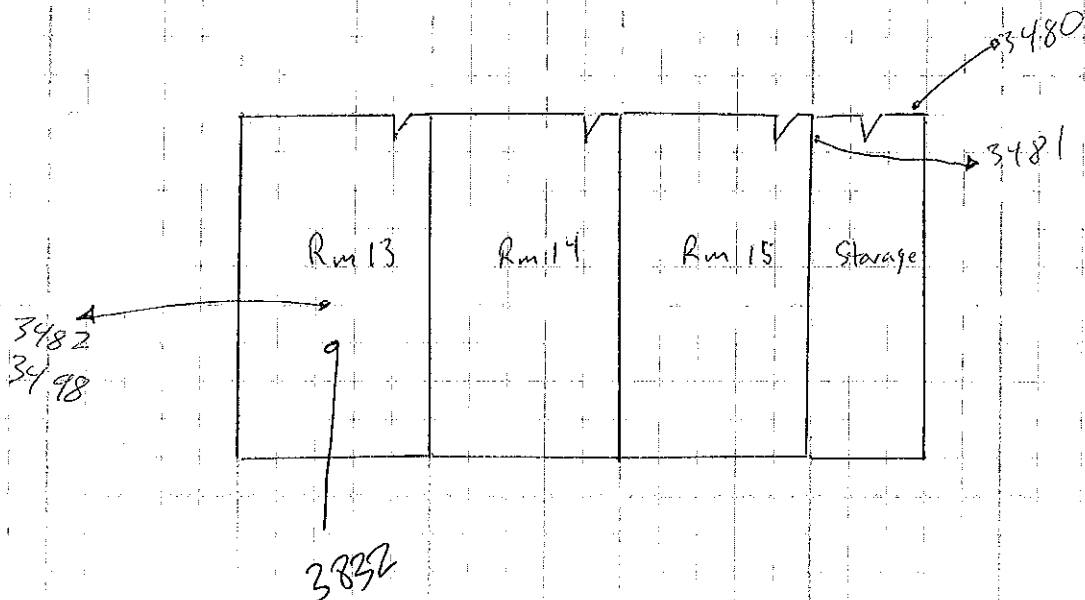

DESCRIPTION:

Bulk Sample Map

JOB NAME:

Point Dume Bldg E "Rms 13-15"

JOB NO:

107-0008

DATE:

4/15/98

SCALE:

N.T.S.

DRAW BY:

F. Lucatela

SKETCH:

PAGE 1 OF 1




CTL Environmental Services


We're merging with

coffey
environments

A Coffey International
Limited Company

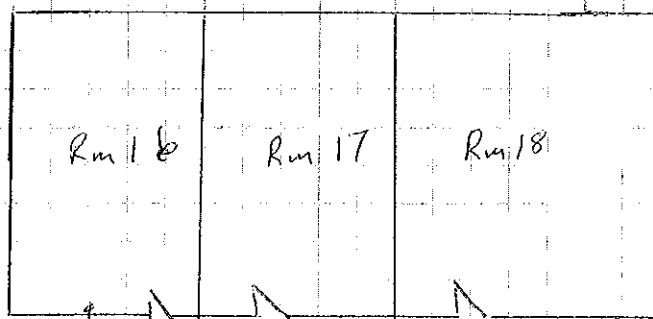

Note: Cement ceilings above ceiling tiles



DESCRIPTION:

Bulk Sample Map

JOB NAME:

Point Duane - Bldg F "Rm 16-18"

JOB NO:

107-0008

DATE:

4/15/08

SCALE:

N.T.S.

DRAW BY:

F. Fuenkajon

SKETCH:

PAGE 1 OF 1





CTL Environmental Services

We're merging with

coffey
environments

A Coffey International
Limited Company

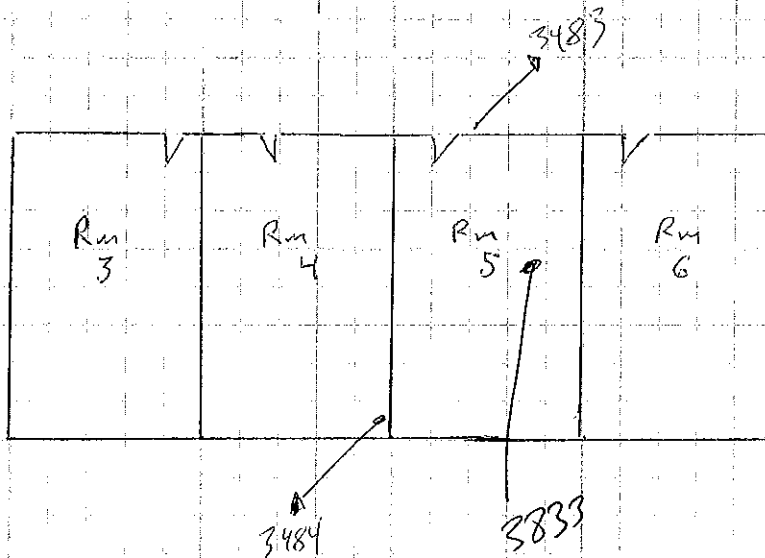

DESCRIPTION:

Bulk Sample Map

JOB NAME:

Point Dume - Bldg G "Rms 3-6"

JOB NO:

107-0008

DATE:

4/15/08

SCALE:

NTS

DRAW BY:

F. Ruvalcaba

SKETCH:

PAGE 1 OF 1




CTL Environmental Services


We're merging with

coffey
environments

A Coffey International
Limited Company

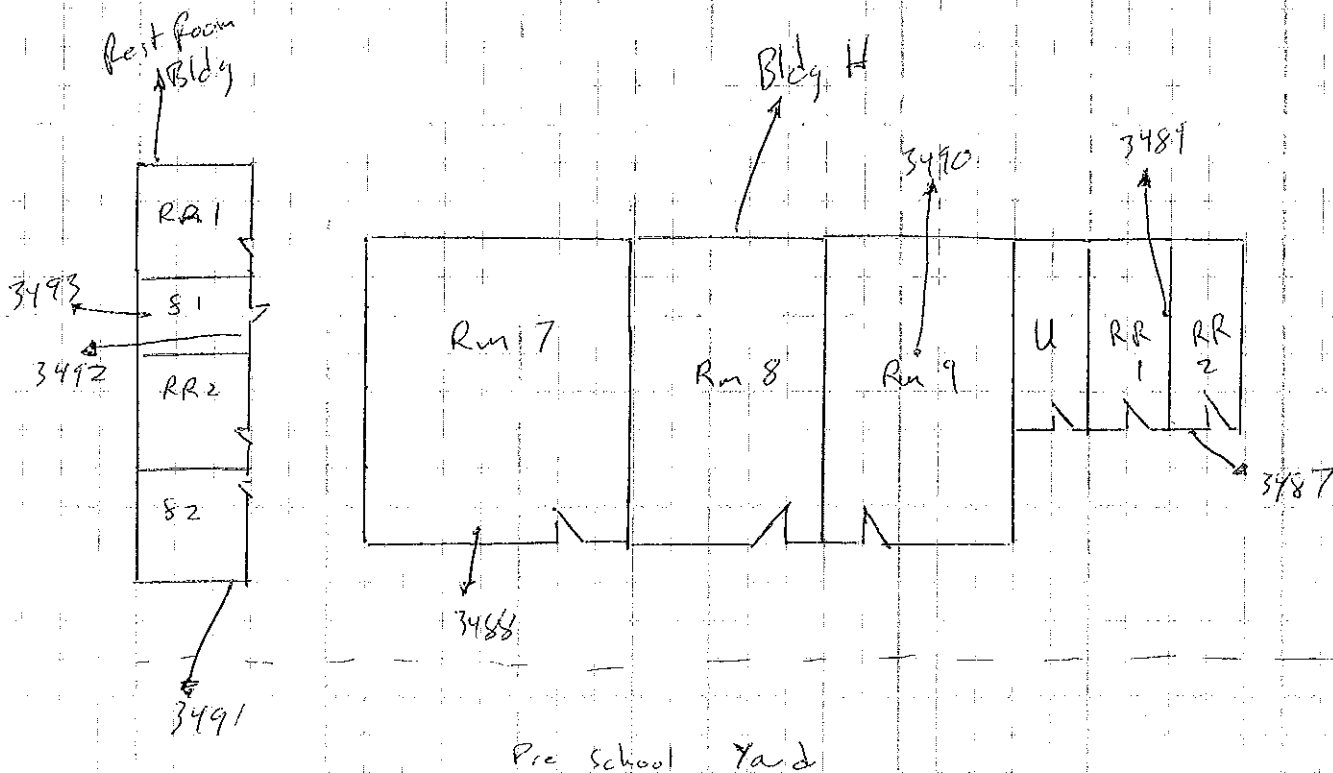

Note: Cement ceilings on top of ceiling tiles



DESCRIPTION:

Bulk Sample Map

JOB NAME:

Point Dume - Bldg. H "Rms 7-9" & RR Bldg

JOB NO:

107-0008

DATE:

8/15/08

SCALE:

NTS

DRAW BY:

F. Ruvalcaba

SKETCH:

PAGE 1 OF 1



CTL Environmental Services

We're merging with

coffey
environments


A Coffey International
Limited Company

APPENDIX D

CTL EMPLOYEE CERTIFICATIONS

State of California
Division of Occupational Safety and Health
Certified Site Surveillance Technician

Fabian Ruvalcaba

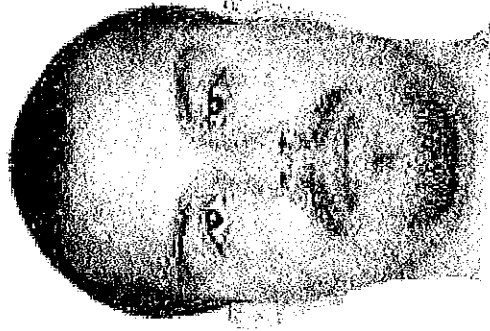

Name

Certification No. **06-4088**

Expires on **11/15/08**

This certification was issued by the Director of
Occupational Safety and Health as authorized by
Sections 7780 et seq. of the Business and
Professions Code.

Global Environmental Training

This is to certify that

Fabian Ruvalcaba

SS# 8083

Has completed course work that meets the criteria required for EPA/AHERA
(TSCA Title II) Approved Reaccreditations and NESHAPs Regulations Training *

Asbestos in Buildings: Building Inspector Refresher

August 9, 2007

Course Date

27159-BIR

Certificate Number

August 9, 2008

Expiration Date

CA - 023 - 06

Course Approval Number


Mario Virgen
Course Director



1520 W. Cameron Ave., Suite 240 * West Covina, CA 91790 (626) 962-4436

*This course meets California requirements

Global Environmental Training

This is to certify that

Fabian Ruvalcaba

SS# 557-83-8083

Has completed course work that meets the criteria required for EPA/AHERA
(TSCA Title II) Approved Reccreditation and NESHAPs Regulations Training *

Asbestos in Buildings: Abatement Contractor Supervisor Refresher

August 08, 2007
Course Date

27155-CSR
Certificate Number

August 08, 2008
Expiration Date

CA - 023 - 04
Course Approval Number


Mario Virgen
Course Director

