

AHERA THREE-YEAR RE-INSPECTION

Webster Elementary School
3602 Winter Canyon Road
Malibu, California

Prepared for:

Santa Monica-Malibu Unified School District
1651 Sixteenth Street
Santa Monica, California 90404

Project No.: 110-0006

Date: June 22, 2010

Coffey Environments
3777 Long Beach Boulevard Annex Building
Long Beach CA 90807 United States of America
T +1 310 530 5006 F +1 310 530 0792
Toll-free (US only) 800 777-0605 coffey.com

June 22, 2010

Santa Monica-Malibu Unified School District
1651 Sixteenth Street
Santa Monica, California 90404

Attention: Mr. Terry Kamabayashi

Ref: Three-year Re-Inspection
Webster Elementary School, 3602 Winter Canyon Road, Malibu, California

Coffey Environments Project No. 110-0006

Dear Mr. Kamabayashi:

Coffey Environments is pleased to present its report for three-year re-inspection of Webster Elementary School, located at 3602 Winter Canyon Road, Malibu, California .


Please do not hesitate to contact the undersigned if you wish to discuss any aspect of the report.

Respectfully submitted by:

Reviewed by:

Coffey Environments

Coffey Environments



Elmer Castro
Certified Site Surveillance Technician
Cal/OSHA Cert. #08-4406

Cesar Ruvalcaba
Certified Asbestos Consultant
Cal/OSHA Cert. #95-1799

REPORTED: June 22, 2010

PROJECT NO.: 110-0006

CLIENT: Santa Monica-Malibu Unified School District
1651 Sixteenth Street
Santa Monica, California 90404

ATTENTION: Mr. Terry Kamabayashi

REF: AHERA Three-year Re-inspection
Webster Elementary School
3602 Winter Canyon Road
Malibu, California

1 PROJECT SUMMARY

Coffey Environments conducted an AHERA three-year re-inspection of Webster Elementary School, located at 3602 Winter Canyon Road, Malibu, California . Elmer Castro, a Cal/OSHA Certified Site Surveillance Technician and EPA-accredited Building Inspector employed by Coffey Environments, conducted the inspection on March 15, 2010 .

2 FIELD AND ANALYTICAL METHODOLOGY

The inspection was conducted in accordance with protocol set forth in the Asbestos Hazard Emergency Response Act (AHERA) *40 CFR 763 Subpart E*. Information in this report is based on the original AHERA inspection conducted in fulfillment of the requirements of *40 CFR 763 Subpart E*.

The re-inspection activities included the following elements:

- Visual inspection of known asbestos-containing materials (ACM), both friable and non-friable, and suspect ACM not previously identified or sampled;
- Identification of friable and non-friable ACM including ACM not previously identified or sampled; and
- Assessment of friable and damaged non-friable ACM, including ACM not previously identified or sampled.

3 RESULTS

Please refer to the AHERA three-year re-inspection material inventory located in Appendix A.

4 RECOMMENDATIONS

ACM should be monitored and maintained as part of the Webster Elementary School operations and maintenance program until renovation or demolition activities require removal or until material becomes

EXECUTIVE SUMMARY

Coffey Environments conducted an AHERA three-year re-inspection of Webster Elementary School, located at 3602 Winter Canyon Road, Malibu, California . Our Certified Site Surveillance Technician/Certified Asbestos Consultant conducted the following activities to document the project:

- Visual inspection of known asbestos-containing materials (ACM), both friable and non-friable, and suspect ACM not previously identified or sampled;
- Identification of friable and non-friable ACM including ACM not previously identified or sampled;
- Assessment of friable and damaged non-friable ACM, including ACM not previously identified or sampled; and
- For each suspect material not assumed to be ACM, the inspection include the collection, submission and analysis of bulk samples as outlined in *40 CFR 763 Subpart E*.

CONTENTS

1	PROJECT SUMMARY	1
2	FIELD AND ANALYTICAL METHODOLOGY	1
3	RESULTS	1
4	RECOMMENDATIONS	1
5	ASSUMPTIONS AND LIMITATIONS	2
6	SIGNATORY	2

Appendices

Appendix A: AHERA Three-Year Re-Inspection Material Inventories

Appendix B: Previous Inspection Reports

Appendix C: Response Action Ratings

Appendix D: Field Sheets

Appendix E: Assessments

significantly damaged or the hazard potential changes. Remove or repair these items when practical and cost-effective in conjunction with an EPA-accredited Project Designer.

5 ASSUMPTIONS AND LIMITATIONS

This report was prepared exclusively for use by Santa Monica-Malibu Unified School District, and may not be relied upon by any other person or entity without Coffey Environments' express written permission. The information, conclusions and recommendations described in this report apply to conditions existing at certain locations when services were performed and are intended only for the specific purposes, locations, time frames and project parameters indicated. Coffey Environments cannot be responsible for the impact of any changes in environmental standards, practices or regulations after performance of services.

In performing our professional services, we have applied present engineering and scientific judgment and used a level of effort consistent with the current standard of practice for similar types of studies.

As applicable, Coffey Environments has relied in good faith upon representations and information furnished by individuals with respect to operations and existing property conditions, to the extent that they have not been contradicted by data obtained from other sources. Accordingly, Coffey Environments accepts no responsibility for any deficiencies, omissions, misrepresentations, or fraudulent acts of persons interviewed.

Coffey Environments will not accept any liability for loss, injury claim, or damage arising directly or indirectly from any use or reliance on this report. Coffey Environments makes no warranty, expressed or implied

This report is issued with the understanding that the client, the property owner, or its representative is responsible for ensuring that the information, conclusions, and recommendations contained herein are brought to the attention of the appropriate regulatory agencies, as required.

If you have any questions, please do not hesitate to contact the undersigned at (310) 530-5006. We appreciate the opportunity to be of service to Santa Monica-Malibu Unified School District.


6 SIGNATORY

Respectfully submitted by:

Reviewed by:

Coffey Environments

Coffey Environments



Elmer Castro
Certified Site Surveillance Technician
Cal/OSHA Cert. #08-4406

Cesar Ruvalcaba
Certified Asbestos Consultant
Cal/OSHA Cert. #95-1799

CR:cdm

Appendix A

AHERA Three-Year Re-Inspection Material Inventories

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building A

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
S	Stucco	Exterior walls	ND	No	3,000 sq. ft.	<1% Chrysotile	8
S	Plaster	Room 17-20 and heater closets	ND	No	3,500 sq. ft.	None detected	N/A
M	Drywall with joint compound	Room 17, 18 and room 20 dividing walls	ND	No	800 sq. ft.	None detected	N/A
M	Carpet glue	Rooms 17-20	ND	No	2,800 sq. ft.	None detected	N/A
M	12x12 light green speckled floor tile and glue	Room 17, room 18 under carpet, room 20	ND	No	2,200 sq. ft.	None detected	N/A
M	4 inch dark green cove base and glue	Room 17, room 20, room 19	ND	No	90 in. ft.	None detected	N/A
M	4 inch brown cove base and glue	Room 18	ND	No	75 in. ft.	None detected	N/A
M	4 inch gray cove base and glue	Room 20	ND	No	30 in. ft.	None detected	N/A
M	2x4 fissured ceiling panel	Rooms 17-20	ND	Yes	3,200 sq. ft.	None detected	N/A
M	HVAC duct tape (gray)	Heater closets 1, 2, 3, 4	ND	No	20 sq. ft.	None detected	N/A

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building A

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
M	Heater units	Heater closets	ND	No	4 each	Assumed 1	8
M	12" beige speckled floor tile and mastic	Room 14	ND	No	120 sq. ft.	Assumed 1	8
M	Window putty	Exterior windows	ND	No	2,500 in. ft.	None detected	N/A

(1) S: surfacing, TSI: thermal system insulation, M: miscellaneous

(2) ND: not damaged, D: damaged, SD: significantly damaged

(3) POS: previously identified as positive, NEG: previously identified as negative, ASSUMED 1 = new material, not sampled, assumed asbestos-containing; ASSUMED 2 = not enough samples collected, material is assumed asbestos-containing

(4) For response actions 1-8 refer to "Response Action Ratings Sheet"

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building B

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
S	Stucco	Exterior walls	ND	No	2,200 sq. ft.	None detected	N/A
M	Gypsum with joint compound	Classrooms, work rooms (dividing walls), toilets, storages	ND	No	1,600 sq. ft.	Positive	8
M	Window putty	Exterior walls	ND	No	1,200 sq. ft.	None detected	N/A
M	Drywall joint compound	Storage room	ND	No	750 sq. ft.	None detected	N/A
M	9" gray floor tile with yellow streaks	Work room 2 and 1	ND	No	80 sq. ft.	Positive	8
M	Drywall with joint compound	Heater rooms	ND	No	600 sq. ft.	3% Chrysotile	8
M	12x12 light green floor tile and glue	Room 11 and 12	ND	No	500 sq. ft.	Assumed 1	8
M	4 inch dark green cove base and glue	Room 11 and 12	ND	No	180 sq. ft.	Assumed 1	8
M	Carpet glue	Room 11 and 12	ND	No	1,800 sq. ft.	Assumed 1	8
M	2x4 fissured ceiling panel	Room 11 and 12	ND	Yes	2,300 sq. ft.	Assumed 1	8

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building B

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
M	12" random peghole ceiling tile	Room 11 and 12 south side	ND	Yes	10 sq. ft.	Negative	N/A
M	Heater unit	Heater closets	ND	No	2 each	Assumed 1	8
M	Chalk boards	non-suspect ACM	ND	No	N/A	N/A	N/A

(1) S: surfacing, TSI: thermal system insulation, M: miscellaneous

(2) ND: not damaged, D: damaged, SD: significantly damaged

(3) POS: previously identified as positive, NEG: previously identified as negative, ASSUMED 1 = new material, not sampled, assumed asbestos-containing; ASSUMED 2 = not enough samples collected, material is assumed asbestos-containing

(4) For response actions 1-8 refer to "Response Action Ratings Sheet"

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building C

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/ Response Action (4)
S	Stucco	Exterior walls	ND	No	3,900 sq. ft.	None detected	N/A
M	12" gray floor tile with brown streaks and mastic	Under carpets in ESL room and classroom 15	ND	No	800 sq. ft.	Positive	8
M	Window putty	Exterior windows	ND	No	2,600 sq. ft.	<1% Chrysotile	8
	12" random pin hole ceiling tile glue	ESL room			600 sq. ft.	None detected	
	12" random pinhole ceiling tile (new)	Replacement in ESL classroom			20 sq. ft.	None detected	
M	Rough plaster	Boy's, Girl's, custodian room and electrical room	ND	No	950 sq. ft.	None detected	N/A
M	HVAC duct tape	Heater closets	ND	No	4 each	None detected	N/A
M	Drywall with joint compound	Room 13-16 dividing walls, room 16A walls and ceilings, boy's, girl's, electrical room and custodian ceilings	ND	No	3,100 sq. ft.	2% Chrysotile	8
M	Drywall with joint compound	Heater closet 1-4	ND	No	700 sq. ft.	2% Chrysotile	8
M	12x12 light speckled green floor tile and glue	13, 14, 15, 16	ND	No	800 sq. ft.	Assumed 1	8

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building C

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
M	4 inch dark green cove base and glue	Rooms 13, 14, 15, 16	ND	No	240 in. ft.	Assumed 1	8
M	4 inch gray cove base and glue	ESL room (16A), 16	ND	No	70 in. ft.	Assumed 1	8
	2x4 fissured ceiling panel	Room 13-16	ND	Yes	3,800 sq. ft.	Assumed 1	8
M	Chalk board	Rooms 13, 14, 15, 16 and 16A (ESL)	ND	No	9 each	Assumed 1	8
M	Heater units	Rooms 13, 14, 15, 16 and 16A (ESL)	ND	No	5 each	Assumed 1	8

(1) S: surfacing, TSI: thermal system insulation, M: miscellaneous

(2) ND: not damaged, D: damaged, SD: significantly damaged

(3) POS: previously identified as positive, NEG: previously identified as negative, ASSUMED 1 = new material, not sampled, assumed asbestos-containing
ASSUMED 2 = not enough samples collected, material is assumed asbestos-containing

(4) For response actions 1-8 refer to "Response Action Ratings Sheet"

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building D

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
S	Stucco	Exterior walls	ND	No	2,950 sq. ft.	None detected	N/A
M	12" brown floor tile with peach specks with mastic	Room 19 and 20 under carpet	ND	No	600 sq. ft.	Positive	8
S	Rough plaster ceiling	Heater closet and electrical room	ND	No	700 sq. ft.	None detected	8
M	9" dark tan with brown floor tile and mastic	Electrical room 4		No	40 sq. ft.	Positive	8
M	4 inch brown cove base with glue	Electrical room		No	20 in. ft.	None detected	
M	Window putty	Exterior windows	ND	No	200 in. ft.	2% Chrysotile	8
M	Drywall with joint compound	All dividing walls, except electrical room and heater closets	ND	No	3,800 sq. ft.	None detected	N/A
M	4 inch gray cove base and glue	Nurses office, audio testing room, work room, principals office, main office and hall	ND	No	280 in. ft.	Assumed 1	8
M	HVAC duct tape	Heater room	ND	No	5 sq. ft.	Assumed 1	8

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building D

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
M	2x4 fissured ceiling panel	Nurses office, audio testing room, work room, main office, principals office and hall	ND	Yes	1,800 sq. ft.	Assumed 1	8
M	Heater unit	Heater room	ND	No	1 each	Assumed 1	8
M	12x12 light green floor tile and glue	Principal office, main office, nurses office, work room, hall	ND	No	1,400 sq. ft.	Assumed 1	8

(1) S: surfacing, TSI: thermal system insulation, M: miscellaneous

(2) ND: not damaged, D: damaged, SD: significantly damaged

(3) POS: previously identified as positive, NEG: previously identified as negative, ASSUMED 1 = new material, not sampled, assumed asbestos-containing; ASSUMED 2 = not enough samples collected, material is assumed asbestos-containing

(4) For response actions 1-8 refer to "Response Action Ratings Sheet"

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building E

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
S	Stucco	Exterior walls	ND	No	1,950 sq. ft	None detected	N/A
M	Drywall with joint compound	Office 2, east wall computer room walls	ND	No	480 sq. ft	None detected	N/A
M	Window putty	Exterior windows	ND	No	800 in. ft.	None detected	N/A
M	Rough plaster walls	Library	ND	No	2,950 sq. ft	None detected	N/A
S	Smooth plaster walls	Office 1, 2 and heater closet	ND	No	2,450 sq. ft	None detected	N/A
M	12" random peg hole wall and tile glue	Heater closet	ND	Yes	100 sq. ft	None detected	N/A
M	Carpet glue	Room 7	ND	No	900 sq. ft	None detected	N/A
M	Brown floor tile and mastic	Room 7 under carpet	ND	No	900 sq. ft	5% Chrysotile (tile) 2% Chrysotile	8
M	12"x12" gray speckled floor tile	Office 1 and 2	ND	No	700 sq. ft	None detected	N/A
M	12"x12 light green floor tile and glue	Room 7	ND	No	250 sq. ft	Assumed 1	8

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building E

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
M	4 inch dark green cove base and glue	Library, office 1, 2 computer	ND	No	400 in. ft.	Assumed 1	8
M	HVAC duct tape	Heater closet	ND	No	2 sq. ft.	Assumed 1	8
M	2x4 fissured ceiling panel	Library, room 7	ND	Yes	3,000 sq. ft.	Assumed 1	8
M	Heater unit	Heater closet	ND	No	1 each	Assumed 1	8
M	4" black covebase and adhesive	Office 1	ND	No	100 in. ft.	Assumed 1	8
M	12" blue floor tile and adhesive	Comp. room, office 7	ND	No	700 sq. ft.	Assumed 1	8
M	Chalk board	Room 7	ND	No	1,400 sq. ft.	Assumed 1	8

(1) S: surfacing, TSI: thermal system insulation, M: miscellaneous

(2) ND: not damaged, D: damaged, SD: significantly damaged

(3) POS: previously identified as positive, NEG: previously identified as negative, ASSUMED 1 = new material, not sampled, assumed asbestos-containing; ASSUMED 2 = not enough samples collected, material is assumed asbestos-containing

(4) For response actions 1-8 refer to "Response Action Ratings Sheet"

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building F

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/ Response Action (4)
S	Stucco	Exterior walls	ND	No	2,200 sq. ft.	None detected	N/A
M	Rough plaster walls	Classrooms, janitors closet and mechanical room	ND	No	2,500 sq. ft.	None detected	N/A
M	Window putty	Exterior windows	ND	No	300 in. ft.	Positive	8
M	Smooth plaster ceiling	Boy's restrooms and girl's restrooms	ND	No	500 sq. ft.	None detected	N/A
S	Smooth plaster wall	Boy's and girl's walls	ND	No	950 sq. ft.	None detected	N/A
M	Brown floor tile and mastic	Rooms 9 and 10 under carpet	ND	No	1,600 sq. ft.	5% Chrysotile (tile and mastic)	8
M	12" straight peg hole ceiling and glue	Rooms 8, 9, 10	ND	No	700 sq. ft.	None detected	N/A
M	Drywall	Rooms 8, 9, 10	ND	No	700 sq. ft.	None detected	N/A
M	12x12 light green floor tile and glue	Rooms 8, 9, 10	ND	No	750 sq. ft.	Assumed 1	8
M	4 inch gray cove base and glue	Rooms 8, 9, 10 tiled area	ND	No	90 in. ft.	Assumed 1	8

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building F

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
M	HVAC duct tape	Mechanical room	ND	No	50 sq. ft.	Assumed 1	8
M	Carpet glue	Rooms 8, 9, 10	ND	No	2,700 sq. ft.	Assumed 1	8
M	2x4 fissured ceiling panel	Rooms 8, 9, 10	ND	Yes	3,400 sq. ft.	Assumed 1	8
M	Heater unit	Mechanical room	ND	No	1 each	Assumed	8
M	Chalk board	Rooms 8, 9, 10	ND	No	6 each	N/A	N/A

(1) S: surfacing, TSI: thermal system insulation, M: miscellaneous

(2) ND: not damaged, D: damaged, SD: significantly damaged

(3) POS: previously identified as positive, NEG: previously identified as negative, ASSUMED 1 = new material, not sampled, assumed asbestos-containing; ASSUMED 2 = not enough samples collected, material is assumed asbestos-containing

(4) For response actions 1-8 refer to "Response Action Ratings Sheet"

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building G

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
S	Stucco	Exterior walls	ND	No	4,500 sq. ft.	<1% Chrysotile	8
M	Window putty	Exterior window on west and south side	ND	No	300 ln. ft.	<1% Chrysotile	8
M	Gray with black dots floor sheeting	Kitchen	ND	No	1,200 sq. ft.	None detected	N/A
M	12" offwhite floor tile and mastic	Auditorium	ND	No	2,500 sq. ft.	Positive	8
M	9" dark tan floor tile and mastic	Janitors room	ND	No	80 sq. ft.	Positive	8
S	Rough plaster ceiling	Auditorium, kitchen, storage room, Teacher's work room, mechanical room	ND	Yes	1,900 sq. ft.	None detected	N/A
M	12" brown speckled floor tile and mastic	Auditorium east side	ND	No	300 sq. ft.	Assumed 1	8
M	4" blue covebase and glue	Auditorium	ND	No	50 ln. ft.	Assumed 1	8
S	Rough plaster walls	Storage room, mechanical room	ND	No	1,900 sq. ft.	None detected	N/A
S	Smooth plaster ceiling	Teacher's dining room and restrooms	ND	No	1,500 sq. ft.	None detected	N/A

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building G

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/ Response Action (4)
S	Stucco	Exterior walls	ND	No	4,500 sq. ft.	<1% Chrysotile	8
M	Window putty	Exterior window on wet and south side	ND	No	300 in. ft.	<1% Chrysotile	8
M	Gray with black dots floor sheeting	Kitchen	ND	No	1,200 sq. ft.	None detected	N/A
M	12" off white floor tile and mastic	Auditorium	ND	No	2,500 sq. ft.	Positive	8
M	9" dark tan floor tile and mastic	Jahitors room	ND	No	80 sq. ft.	Positive	8
S	Rough plaster ceiling	Auditorium, kitchen, storage room, Teacher's work room, mechanical room	ND	Yes	1,900 sq. ft.	None detected	N/A
M	12" brown speckled floor tile and mastic	Auditorium east side	ND	No	300 sq. ft.	Assumed 1	8
M	4" blue covebase and glue	Auditorium	ND	No	50 in. ft.	Assumed 1	8
S	Rough plaster walls	Storage room, mechanical room	ND	No	1,900 sq. ft.	None detected	N/A
S	Smooth plaster ceiling	Teacher's dining room and restrooms	ND	No	1,500 sq. ft.	None detected	N/A

Client: Santa Monica-Malibu Unified School District

Project No.: 110-0006

Project Name: AHERA 3-year re-inspection-Webster ES

Building G

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
S	Smooth plaster walls	Teacher's dining room, kitchen, teacher's work room, auditorium and restrooms, kiln room, stage area	ND	No	8,500 sq. ft.	None detected	N/A
M	Drywall	Storage area (no joint compound)	ND	No	60 sq. ft.	None detected	N/A
M	4 inch light gray cove base and glue	Dining room	ND	No	90 sq. ft.	None detected	N/A
M	12x12 pinkish with dark spots floor tile	Dining room	ND	No	700 sq. ft.	None detected	N/A
M	Hot brick	Kiln room, kiln unit	ND	No	30 sq. ft.	None detected	N/A
M	4 inch brown cove base and glue	Auditorium stage area	ND	No	170 ln. ft.	None detected	N/A
M	Heater unit	Mechanical room	ND	No	1 each	Assumed 1	8
M	Chalkboard mastic	All classrooms	ND	No	240 sq. ft.	Assumed 1	8

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building G

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
M	12" straight peghole ceiling tile and mastic	Kitchen, SE storage area, teacher's work area, kiln room	ND	No	3,000 sq. ft.	None detected	N/A
M	12" fissured ceiling tile and mastic	Auditorium	ND	Yes	1,900 sq. ft.	None detected	N/A
M	HVAC exhaust vent pipe joint tape	Boiler room	ND	No	20 sq. ft.	None detected	N/A
M	12" black speckled floor tile and mastic	Kiln room	ND	No	200 sq. ft.	Assumed 1	8
M	4" black covebase and glue	Kiln room	ND	Yes	30 ln. ft.	Assumed 1	8

(1) S: surfacing, TSI: thermal system insulation, M: miscellaneous

(2) ND: not damaged, D: damaged, SD: significantly damaged

(3) POS: previously identified as positive, NEG: previously identified as negative, ASSUMED 1 = new material, not sampled, assumed asbestos-containing; ASSUMED 2 = not enough samples collected, material is assumed asbestos-containing

(4) For response actions 1-8 refer to "Response Action Ratings Sheet"

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building H

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
S	Ext. wall stucco	Exterior walls	ND	No	4,000 sq. ft.	None detected	N/A
S	Rough plaster wall	Janitor's, electrical rooms	ND	No	800 sq. ft.	None detected	N/A
M	12" straight peg hole tile and mastic	Room 1-4	ND	Yes	800 sq. ft.	None detected	N/A
M	Window putty	Exterior windows	ND	No	2,800 in. ft.	2% Chrysotile	8
M	Drywall with joint compound	Heater closets and south side soffit rooms 1-4	ND	No	950 sq. ft.	None detected	N/A
M	Gypsum ceiling board	above ceiling panels in rooms 1-4 (no joint compound observed)	ND	No	3,500 sq. ft.	None detected	N/A
S	Smooth plaster	Classroom 1-4, boy's and girl's restrooms	ND	No	7,600 sq. ft.	None detected	N/A
M	Brown floor tile and mastic	Rooms 1-4 under carpet	ND	No	2,800 sq. ft.	7% Chrysotile (tile) 2% Chrysotile (mastic)	8
M	12x12 light green floor tile and glue	Rooms 1-4	ND	No	1,000 sq. ft.	Assumed 1	8
M	4 inch dark green cove base and glue	Rooms 1-4 carpet area	ND	No	280 in. ft.	Assumed 1	8
M	4 inch gray cove base and glue	Room 1-4 tiled area	ND	No	120 in. ft.	Assumed 1	8

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Building H

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
M	HVAC duct tape	Rooms 1-4 heater closet	ND	No	4 each	Assumed 1	8
M	Carpet glue	Room 1-4	ND	No	900 sq. ft.	Assumed 1	8
M	Heater unit	Heater rooms in room 1-4	ND	No	4 each	Assumed	8
M	Chalkboard (dry erase)	Room 1-4	ND	No	8 each	N/A-non suspect	N/A
M	Sink undercoating	Rooms 1-4	ND	No	4 each	Positive	8

(1) S: surfacing, TSI: thermal system insulation, M: miscellaneous

(2) ND: not damaged, D: damaged, SD: significantly damaged

(3) POS: previously identified as positive, NEG: previously identified as negative, ASSUMED 1 = new material, not sampled, assumed asbestos-containing; ASSUMED 2 = not enough samples collected, material is assumed asbestos-containing

(4) For response actions 1-8 refer to "Response Action Ratings Sheet"

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Portables 21, 22, 23

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendational/ Response Action (4)
M	Drywall	Portables 21, 22, 23 behind fiberboards	ND	No	3,600 sq. ft.	None detected	N/A
M	2x4 fissured ceiling	Portable 21	ND	No	900 sq. ft.	None detected	N/A
M	4 inch dark blue cove base and glue	Portables 21, 22, 23	ND	No	240 sq. ft.	None detected	N/A
M	Carpet glue	Portables 21, 22, 23	ND	No	3,400 sq. ft.	None detected	N/A
M	12x12 light blue speckled floor tile	Portable 22 at southwest and southeast sides	ND	No	30 sq. ft.	None detected	N/A

(1) S: surfacing, TSI: thermal system insulation, M: miscellaneous

(2) ND: not damaged, D: damaged, SD: significantly damaged

(3) POS: previously identified as positive, NEG: previously identified as negative, ASSUMED 1 = new material, not sampled, assumed asbestos-containing; ASSUMED 2 = not enough samples collected, material is assumed asbestos-containing

(4) For response actions 1-8 refer to "Response Action Ratings Sheet"

Client: Santa Monica-Malibu Unified School District
Project No.: 110-0006
Project Name: AHERA 3-year re-inspection-Webster ES

Walkways

Material Class (1)	Material	Material Location	Current Assessment (2)	Friable (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations/Response Action (4)
S	Walk way stucco ceiling	All walk ways	ND	No	4,800 sq. ft.	None detected	N/A

(1) S: surfacing, TSI: thermal system insulation, M: miscellaneous

(2) ND: not damaged, D: damaged, SD: significantly damaged

(3) POS: previously identified as positive, NEG: previously identified as negative, ASSUMED 1 = new material, not sampled, assumed asbestos-containing
ASSUMED 2 = not enough samples collected, material is assumed asbestos-containing

(4) For response actions 1-8 refer to "Response Action Ratings Sheet"

Appendix B

Previous Inspection Reports

**ASBESTOS SURVEY
PROJECT RECORD**

**Webster Elementary School
3602 Winter Canyon Road
Malibu, California**

Prepared for:

**Santa Monica-Malibu Unified School District
1651 16th Street
Santa Monica, California 90404**

Prepared by:

CTL Environmental Services
24404 South Vermont Avenue, Suite 307
Harbor City, California 90710
(310) 530-5006

March 27, 2008
CTL Project No. 107-0008

TABLE OF CONTENTS

EXECUTIVE SUMMARY

INVESTIGATION	1
METHODOLOGY	1
RESULTS	2
CONCLUSIONS AND RECOMMENDATIONS	5
ASSUMPTIONS AND LIMITATIONS	5

TABLES/APPENDICES

A. Material Inventory

Summary of Bulk Sample Analysis
Sample Identification
Sample Description
Estimated Quantities

B. Laboratory Analysis Report

C. Sample Locations

D. CTL Employee Certifications

E. Previous Survey Record

EXECUTIVE SUMMARY



CTL Environmental Services

24404 South Vermont Avenue, Suite 307 • Harbor City, CA 90710 • TEL: (310) 530-5006 • FAX: (310) 530-0792

REPORTED: March 27, 2008

CTL PROJECT NO.: 107-0008

CLIENT: Santa Monica-Malibu Unified School District
1651 16th Street
Santa Monica, California 90404

ATTENTION: Mr. Wally Berriman

REF: Asbestos Survey
Webster Elementary School
3602 Winter Canyon Road
Malibu, California

INVESTIGATION

On February 28, 2007, CTL Environmental Services (CTL) conducted an investigation for the presence of asbestos-containing materials (ACMs) at Webster Elementary School located in Malibu, California. The survey included the following:

- (a) An initial investigation to locate suspect ACMs
- (b) Physical assessment of suspect materials
- (c) The collection of bulk samples from suspect materials
- (d) Laboratory analysis of all collected samples

Santa Monica-Malibu Unified School District, located in Santa Monica, California, retained CTL for this investigation. Victor Sanchez, a Cal-OSHA Certified Site Surveillance Technician and EPA-accredited Building Inspector employed by CTL, conducted the sampling.

Prior sampling results of suspect materials, conducted by Cape Environmental, were submitted to CTL prior to the site visit. This report was reviewed, and conclusions based on that data were included in this report.

METHODOLOGY

The sampling was conducted using guidelines set forth in Federal Register *40 CFR Part 763*.

Based on the requirements of the United States Environmental Protection Agency (USEPA) as set forth in *40 CFR 763*, a homogeneous area is defined as "an area of surfacing material, thermal system insulation material, or miscellaneous material that is uniform in color and texture". Furthermore, the regulation requires that a minimum number of samples be collected from each

identified homogeneous area. If one sample in a homogeneous area is found to contain asbestos, the entire homogeneous area is considered to be asbestos-containing.

It is possible that one sample out of a set of samples collected from a homogeneous area can be positive for asbestos and the remaining samples in the homogeneous area are negative. However, the entire area must be considered as asbestos-containing.

Caution is advised in interpreting results provided herein.

Bulk samples collected from the subject site were subsequently analyzed by Polarized Light Microscopy (PLM) for asbestos content in accordance with the United States Environmental Protection Agency (EPA) *Determination of Asbestos in Bulk Building Materials: EPA/600/R-93/116, July 1993*, at AmeriSci Los Angeles, a NVLAP-accredited laboratory located in Carson, California.

RESULTS

The following materials were found to be asbestos-containing.

Building A

MATERIAL	SAMPLE NUMBER	MATERIAL LOCATION	ASBESTOS CONTENT
Stucco	7785-7788 & W2401	Exterior walls	None Detected- <1% Chrysotile
Gravel roof core	NA	Roof	Assumed
Roof mastic	NA	Roof penetrations	Assumed
Heater unit gasket	NA	Heater closets	Assumed

Building B

MATERIAL	SAMPLE NUMBER	MATERIAL LOCATION	ASBESTOS CONTENT
Gypsum walls with joint compound	W1002 & W1004	Classrooms, work rooms (dividing walls), toilets, and storage rooms in classrooms	None Detected- <1% Chrysotile
Drywall joint compound	7826-7828	Classrooms, work rooms (dividing walls), toilets, and storage rooms in classrooms	None Detected- 3% Chrysotile
9" gray floor tile with yellow steaks	W0701	Work room 2 and 1	5% Chrysotile (tile), 10% Chrysotile (mastic)
Drywall	7834-7837	Heater rooms	None Detected (drywall), None Detected-3% Chrysotile (drywall joint compound)
Gravel roof core	NA	Roof	Assumed
Roof mastic	NA	Roof penetrations	Assumed

Building C

MATERIAL	SAMPLE NUMBER	MATERIAL LOCATION	ASBESTOS CONTENT
12" gray floor tile with brown streaks and mastic	W0801	Under carpets in ESL room and classroom 15	5% Chrysotile (tile), 10% Chrysotile (mastic)
Window putty	7810	Exterior windows	<1% Chrysotile
Drywall joint compound	7815-7817	Room 13-16 dividing walls, room 16A walls and ceilings, boy's, girl's, electrical room and custodian room ceilings	2% Chrysotile
Drywall/Drywall joint compound	7818-7821	Heater closet 1-4	None Detected (drywall), 2% Chrysotile (drywall joint compound)
Chalk board	NA	Rooms 13, 14, 15, 16 and 16A (ESL)	Assumed
Heater unit gasket	NA	Rooms 13, 14, 15, 16 and 16A (ESL)	Assumed
Gravel roof core	NA	Roof	Assumed
Roof mastic	NA	Roof penetrations	Assumed

Building D, Administration

MATERIAL	SAMPLE NUMBER	MATERIAL LOCATION	ASBESTOS CONTENT
12" brown floor tile with peach specks with mastic	W0901	Room 19 and 20 under carpet	<1% Chrysotile (tile), 5% Chrysotile (mastic)
9" dark tan with brown floor tile and mastic	W0401, W0501	Electrical room 4	5% Chrysotile (tile), 3% Chrysotile (mastic)
Window putty	7898	Exterior windows	2% Chrysotile
Heater unit gasket	NA	Heater room	Assumed
Gravel roof core	N/A	Roof	Assumed
Roof mastic	NA	Roof penetration	Assumed

Building E

MATERIAL	SAMPLE NUMBER	MATERIAL LOCATION	ASBESTOS CONTENT
Window putty	W3001	Exterior windows	4% Chrysotile
12" random peg hole wall tile glue	W1203	Heater closet	Assumed
Brown floor tile and mastic	7855	Room 7 under carpet	5% Chrysotile (tile), 2% Chrysotile (mastic)
Heater unit gasket	NA	Heater closet	Assumed
Gravel roof core	NA	Roof	Assumed
Roof mastic	NA	Roof penetration	Assumed
Chalk board (new, dry erase)	NA	Room 7	Assumed

Building F

MATERIAL	SAMPLE NUMBER	MATERIAL LOCATION	ASBESTOS CONTENT
Window putty	W3003	Exterior windows	7% Chrysotile
Brown floor tile and mastic	7868	Rooms 9 and 10 under carpet	5% Chrysotile (tile), 5% Chrysotile (mastic)
Heater unit gasket	NA	Mechanical room	Assumed
Gravel roof core	NA	Roof	Assumed
Roof mastic	NA	Roof penetration	Assumed

Building G, Auditorium

MATERIAL	SAMPLE NUMBER	MATERIAL LOCATION	ASBESTOS CONTENT
Stucco	7905-7909 & W2406-W2607	Exterior walls	None Detected- <1% Chrysotile
Window putty	7910	Exterior window on wet and south side	<1% Chrysotile
12" off-white floor tile and mastic	W0301	Auditorium	5% Chrysotile (tile), None Detected (mastic)
9" tan floor tile and mastic	W0101	Kitchen	4% Chrysotile (tile), None Detected (mastic)
9" dark tan floor tile and mastic	W0201	Janitors room	5% Chrysotile (tile), 2% Chrysotile (mastic)
Gravel roof core	NA	Roof	Assumed
Roof mastic	NA	Roof penetration	Assumed
Heater unit gasket	NA	Mechanical room	Assumed
Chalkboard mastic	N/A	All classrooms	Assumed

Building H

MATERIAL	SAMPLE NUMBER	MATERIAL LOCATION	ASBESTOS CONTENT
Window putty	7876	Exterior windows	2% Chrysotile
Brown floor tile and mastic	7888	Rooms 1-4 under carpet	7% Chrysotile (tile) 2% Chrysotile (mastic)
Heater unit gasket	NA	Heater rooms in room 1-4	Assumed
Gravel roof core	NA	Roof	Assumed
Roof mastic	NA	Roof penetrations	Assumed
Chalkboard (dry erase)	NA	Room 1-4	Assumed
Sink undercoating	W2801-W2803	Rooms 1-4	10%-15% Chrysotile

Walkways

MATERIAL	SAMPLE NUMBER	MATERIAL LOCATION	ASBESTOS CONTENT
Gravel roof core	NA	Walk way roof	Assumed
Roof mastic	NA	Walk way roof electrical conduit supports	Assumed

The results for all other materials sampled were reported as "None Detected" based upon the limitations of the analytical method. Please refer to the attached Material Inventory for a complete listing of materials sampled, locations and material conditions.

If any materials are found to contain greater than one-tenth of one percent of asbestos by weight as determined by Polarized Light Microscopy (PLM) method of analysis, Cal-OSHA mandates that the material(s) be treated as an asbestos-containing construction material (ACCM) and are subject to regulation under *CCR Title 8, Section 1529*.

If any materials are found to contain more than one percent asbestos by weight as determined by Polarized Light Microscopy (PLM) method of analysis, U.S. EPA mandates that the material(s) be treated as asbestos-containing materials (ACM) and are subject to regulation under *40 CFR 61*.

The Occupational Safety and Health Administration (OSHA) considers sheetrock (drywall) and joint compound to be separate materials and therefore must be analyzed separately for asbestos content (OSHA Standards Interpretation and Compliance Letters 04/28/1997 – Sheetrock and Joint Compound).

All repair and/or removal work and subsequent disposal should be performed by a licensed asbestos abatement contractor prior to any disturbance of any materials determined to contain asbestos.

For the ACMs identified in this report, dry sawing, sanding, or drilling should be avoided. Additional suspect materials may be exposed during demolition and/or renovation activities; such materials should be sampled and analyzed prior to further disturbance.

CONCLUSIONS AND RECOMMENDATIONS

Any damaged asbestos materials should be removed, repaired, encapsulated, or enclosed. The EPA also recommends that all asbestos materials be removed prior to any renovation or demolition activities that may impact the material. The EPA recommends a pro-active, in-place management program be put in place whenever asbestos is discovered in a building. Asbestos materials that are not damaged may be managed in place with a good operations and maintenance program.

ASSUMPTIONS AND LIMITATIONS

This report has been prepared for the exclusive use of Santa Monica-Malibu Unified School District. In performing our professional services, we have applied present engineering and scientific judgment and used a level of effort consistent with the standard of practice measured on the date of work in the locale of the project site for similar type studies.

CTL has relied in good faith upon representations and information furnished by individuals with respect to operations and existing property conditions to the extent that they have not been contradicted by data obtained from other sources. Accordingly, CTL accepts no responsibility for any deficiencies, omissions, misrepresentations, or fraudulent acts of persons interviewed. In addition, CTL will not accept liability for any loss, injury, claim, or damage arising directly or indirectly from any use or reliance on this report. CTL makes no warranty, expressed or implied.

Material quantities are in some cases listed within this document. These quantities are not intended to be used for removal bidding purposes. Nor is this document intended as a contract manual. Work methods and sequence, coordination of participants, applicable codes, engineering controls, required submittals, and notifications should in all cases be addressed in a separate and independent bidding and contract document.

If you have any questions, please feel free to contact the undersigned at (310) 530-5006. We appreciate the opportunity to be of service to Santa Monica-Malibu Unified School District.

Respectfully submitted by,
CTL Environmental Services




Victor Sanchez, CEST
Cal-OSHA Cert. #01-2872

Reviewed by,
CTL Environmental Services



Marie Tullai, CIH
Director, Workplace Health & Safety
Certified Asbestos Consultant
Cal-OSHA Cert. #92-0218

MT/mrw

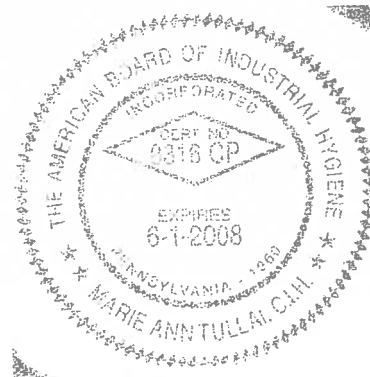

APPENDIX A

MATERIAL INVENTORY:

**SUMMARY OF BULK SAMPLE ANALYSIS
SAMPLE IDENTIFICATION
SAMPLE DESCRIPTION
ESTIMATED QUANTITIES**

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 1 of 2

Building A

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
Stucco	7783	<1% Chrysotile	Northeast	Exterior walls	3,000 sq. ft.	No	No
Stucco	7786	None detected	Northwest	Exterior walls	3,000 sq. ft.	No	No
Stucco	7787	None detected	Southwest	Exterior walls	3,000 sq. ft.	No	No
Stucco	7788	None detected	Southeast	Exterior walls	3,000 sq. ft.	No	No
Stucco	W2401	None detected	Previously sampled Cape Environmental 1993	Exterior walls	3,000 sq. ft.	No	No
Plaster	7789	None detected	Room 17, southeast	Room 17-20 and heater closets	3,500 sq. ft.	No	No
Plaster	7790	None detected	Room 18, northeast	Room 17-20 and heater closets	3,500 sq. ft.	No	No
Plaster	7791	None detected	Room 20, northeast	Room 17-20 and heater closets	3,500 sq. ft.	No	No
Plaster	7792	None detected	Heater closet 1, southwest	Room 17-20 and heater closets	3,500 sq. ft.	No	No
Plaster	7793	None detected	Heater closet 2, southwest	Room 17-20 and heater closets	3,500 sq. ft.	No	No
Drywall	7794	None detected	Room 20, northwest	Room 17, 18 and room 20 dividing walls	800 sq. ft.	No	No
Drywall joint compound	7795	None detected	Room 20, northwest	Room 17, 18 and room 20 dividing walls	800 sq. ft.	No	No
Drywall joint compound	7796	None detected	Room 17, southeast	Room 17, 18 and room 20 dividing walls	800 sq. ft.	No	No
Drywall joint compound	7797	None detected	Mechanical room, southeast	Room 17, 18 and room 20 dividing walls	800 sq. ft.	No	No
Carpet glue	7798	None detected	Room 20, center	Rooms 17-20	2,800 sq. ft.	No	No
12"x12" light green speckled floor tile and glue	7799	None detected	Room 17, northwest	Room 17, room 18 under carpet, room 20	2,200 sq. ft.	No	No
4 inch dark green cove base and glue	7800	None detected	Room 17, north center	Room 17, room 20, room 19	90 in. ft.	No	No
4 inch brown cove base and glue	7801	None detected	Room 18, southwest	Room 18	75 in. ft.	No	No
4 inch gray cove base and glue	7802	None detected	Room 20, southwest	Room 20, west end	30 in. ft.	No	No
2'x4' fissured ceiling panel	7803	None detected	Room 19, center	Rooms 17-20	3,200 sq. ft.	No	No
HVAC duct tape (gray)	7804	None detected	Heater closet #3, center	Heater closets 1, 2, 3, 4	20 sq. ft.	No	No
Gravel roof core	NA	Assumed	Not sampled to avoid damage	Roof	4,250 sq. ft.	No	No
Roof mastic	NA	Assumed	Not sampled to avoid damage	Roof penetrations	25 sq. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
 PROJECT NO: 107-0008
 PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Building A

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
Heater unit gasket	NA	Assumed	Not sampled to avoid damage	Heater closets	4 each	No	No
Window putty	7805	None detected	Northwest	Exterior windows	2,500 ln. ft.	No	No

Note: Flexible collars in heater closets consist of canvas material. Chalkboards are not the original, they are dry erase.

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 1 of 2

Building B

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
Stucco	7822	None detected	Southeast	Exterior walls	2,200 sq. ft.	No	No
Stucco	7823	None detected	Northeast	Exterior walls	2,200 sq. ft.	No	No
Stucco	7824	None detected	Northwest	Exterior walls	2,200 sq. ft.	No	No
Stucco	7825	None detected	Southwest	Exterior walls	2,200 sq. ft.	No	No
Stucco	W2402	None detected	Previously sampled Cape Environmental 1993	Exterior walls	2,200 sq. ft.	No	No
Gypsum walls with joint compound	W1002	None detected	Previously sampled Cape Environmental 1993	Classrooms, work rooms (dividing walls), toilets, and storage rooms in classrooms	1,600 sq. ft.	No	No
Gypsum walls with joint compound	W1004	<1% Chrysotile	Previously sampled Cape Environmental 1993	Classrooms, work rooms (dividing walls), toilets, and storage rooms in classrooms	1,600 sq. ft.	No	No
Drywall joint compound	7826	None detected	Room 11 storage room, southwest	Classrooms, work rooms (dividing walls), toilets, and storage rooms in classrooms	1,600 sq. ft.	No	No
Drywall joint compound	7827	3% Chrysotile	Room 12 storage room, southeast	Classrooms, work rooms (dividing walls), toilets, and storage rooms in classrooms	1,600 sq. ft.	No	No
Drywall joint compound	7828	None detected	Room 11 toilet, northwest	Classrooms, work rooms (dividing walls), toilets, and storage rooms in classrooms	1,600 sq. ft.	No	No
Window putty	7829	None detected	Northeast	Exterior walls	1,200 sq. ft.	No	No
Drywall	7830	None detected	Storage room, northeast	Storage room	750 sq. ft.	No	No
Drywall joint compound	7831	None detected	Storage room, northeast	Storage room	750 sq. ft.	No	No
Drywall joint compound	7832	None detected	Storage room, northwest	Storage room	750 sq. ft.	No	No
Drywall joint compound	7833	None detected	Storage room, southwest	Storage room	750 sq. ft.	No	No
9" gray floor tile with yellow streaks	W0701	5% Chrysotile (tile) 10% Chrysotile (mastic)	Previously sampled Cape Environmental 1993	Work room 2 and 1	80 sq. ft.	No	No
Drywall	7834	None detected	Heater room 1, southwest	Heater rooms	600 sq. ft.	No	No
Drywall joint compound	7835	None detected	Heater room 1, southwest	Heater rooms	600 sq. ft.	No	No
Drywall joint compound	7836	None detected	Heater room 2, southeast	Heater rooms	600 sq. ft.	No	No
Drywall joint compound	7837	3% Chrysotile	Heater room 2, southwest	Heater rooms	600 sq. ft.	No	No
12"x12" light green floor tile and glue	Same as #7999	None detected	Building A	Room 11 and 12	500 sq. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 2 of 2

Building B

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
4 inch dark green cove base and glue	Same as #7800	None detected	Building A	Room 11 and 12	180 sq. ft.	No	No
Carpet glue	Same as #7854	None detected	Building A	Room 11 and 12	1,800 sq. ft.	No	No
Carpet glue	Same as #7898	None detected	Building A	Room 11 and 12	1,800 sq. ft.	No	No
2'x4' fissured ceiling panel	Same as #7803	None detected	Building A	Room 11 and 12	2,300 sq. ft.	Yes	No
Heater unit gasket	Same as #7804	None detected	Building A	Heater closets	2 each	No	No
Gravel roof core	N/A	Assumed	Not sampled to avoid damage	Roof	2,600 sq. ft.	No	No
Roof mastic	N/A	Assumed	Not sampled to avoid damage	Roof penetrations	30 sq. ft.	No	No
Chalk boards	N/A	N/A	Dry erase type boards	Non-suspect ACM	N/A	N/A	N/A
12" brown floor tile with white streaks	N/A	None detected	Previously sampled Cape Environmental 1993	Not observed/Removed	N/A	N/A	N/A
12" random peg hole ceiling tile	N/A	None detected	Previously sampled Cape Environmental 1993	Removed with exception of minor amount along south side used for support conduits	10 sq. ft.	N/A	N/A

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 1 of 2

Building C

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
Stucco	7806	None detected	Southwest	Exterior walls	3,900 sq. ft.	No	No
Stucco	7807	None detected	Southeast	Exterior walls	3,900 sq. ft.	No	No
Stucco	7808	None detected	Northeast	Exterior walls	3,900 sq. ft.	No	No
Stucco	7809	None detected	Northwest	Exterior walls	3,900 sq. ft.	No	No
Stucco	W2403	None detected	Previously sampled Cape Environmental 1993	Exterior walls	3,900 sq. ft.	No	No
12" gray floor tile with brown streaks and mastic	W0801	5% Chrysotile (tile) 10% Chrysotile (mastic)	Previously sampled Cape Environmental 1993	Under carpets in ESL room and classroom 15	800 sq. ft.	No	No
Exterior stucco ceiling	W2501- W2505	None detected	Previously sampled Cape Environmental 1993	Overhang ceilings-entire campus	3,500 sq. ft.	No	No
Window putty	7810	<1% Chrysotile	Southwest	Exterior windows	2,600 sq. ft.	No	No
12" random pin hole ceiling tile glue	7811	None detected	ESL room	ESL room	600 sq. ft.	Yes	No
12" random pinhole ceiling tile (new)	W1201	None detected	Previously sampled Cape Environmental 1993	Replacement in ESL classroom	20 sq. ft.	Yes	No
12" random pinhole ceiling tile	W1301- W1303	None detected	Previously sampled Cape Environmental 1993	ESL classroom	560 sq. ft.	Yes	No
Rough plaster	7812	None detected	Custodian room, northwest	Boy's, Girl's, custodian room and electrical room	950 sq. ft.	No	No
Rough plaster	7813	None detected	Boy's, northwest	Boy's, Girl's, custodian room and electrical room	950 sq. ft.	No	No
Rough plaster	7814	None detected	Girl's, north center	Boy's, Girl's, custodian room and electrical room	950 sq. ft.	No	No
HVAC duct tape	Same as #7804	None detected	Building A	Heater closets	4 each	No	No
Drywall joint compound	7815	2% Chrysotile	Room 13, southwest	Room 13-16 dividing walls, room 16A walls and ceilings, boy's, girl's, electrical room and custodian room ceilings	3,100 sq. ft.	No	No
Drywall joint compound	7816	Not analyzed/positive stop	Room 15, southeast	Room 13-16 dividing walls, room 16A walls and ceilings, boy's, girl's, electrical room and custodian room ceilings	3,100 sq. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 2 of 2

Building C

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
Drywall joint compound	7817	Not analyzed/positive stop	Room 16, northwest	Room 13-16 dividing walls, room 16A walls and ceilings, boy's, girl's, electrical room and custodian room ceilings	3,100 sq. ft.	No	No
Drywall	7818	None detected	Heater closet 1, southwest	Heater closet 1-4	700 sq. ft.	No	No
Drywall joint compound	7819	2% Chrysotile	Heater closet 1, southwest	Heater closet 1-4	700 sq. ft.	No	No
Drywall joint compound	7820	Not analyzed/positive stop	Heater closet 2, southeast	Heater closet 1-4	700 sq. ft.	No	No
Drywall joint compound	7821	Not analyzed/positive stop	Heater closet 4, southwest	Heater closet 1-4	700 sq. ft.	No	No
12"x12" light speckled green floor tile and glue	Same as #7799	None detected	Building A	Rooms 13, 14, 15, 16	800 sq. ft.	No	No
4 inch dark green cove base and glue	Same as #7800	None detected	Building A	Rooms 13, 14, 15, 16	240 ln. ft.	No	No
4 inch gray cove base and glue	Same as #7802	None detected	Building A	ESL room (16A)	70 ln. ft.	No	No
2'x4' fissured ceiling panel	Same as #7803	None detected	Building A	Room 13-16	3,800 sq. ft.	Yes	No
Chalk board *	NA	Assumed	Not sampled to avoid damage	Rooms 13, 14, 15, 16 and 16A (ESL)	9 each	No	No
Heater unit gasket	NA	Assumed	Not sampled to avoid damage	Rooms 13, 14, 15, 16 and 16A (ESL)	5 each	No	No
Gravel roof core	NA	Assumed	Not sampled to avoid damage	Roof	4,750 sq. ft.	No	No
Roof mastic	NA	Assumed	Not sampled to avoid damage	Roof penetrations	50 sq. ft.	No	No

Note: Flexible collars in heater closets consist of vinyl materials (4 each).

* Not original chalkboards (dry erase boards).

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 1 of 2

Building D, Administration

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
Stucco	7889	None detected	Northeast	Exterior walls	2,950 sq. ft.	No	No
Stucco	7890	None detected	North center	Exterior walls	2,950 sq. ft.	No	No
Stucco	7891	None detected	Northwest	Exterior walls	2,950 sq. ft.	No	No
Stucco	7892	None detected	Southwest	Exterior walls	2,950 sq. ft.	No	No
Stucco	7893	None detected	Southeast	Exterior walls	2,950 sq. ft.	No	No
Exterior stucco overhang	W2501-W2505	None detected	Previously sampled Cape Environmental 1993	All exterior overhang ceilings	2,500 sq. ft.	No	No
12" brown floor tile with peach specks with mastic	W0901	<1% Chrysotile (file) 5% Chrysotile (mastic)	Previously sampled Cape Environmental 1993	Room 19 and 20 under carpet	600 sq. ft.	No	No
Rough plaster ceiling	7894	None detected	Heater closet, southeast	Heater closet and electrical room	700 sq. ft.	No	No
Rough plaster ceiling	7895	None detected	Electrical room, southeast	Heater closet and electrical room	700 sq. ft.	No	No
Rough plaster ceiling	7896	None detected	Electrical room, northeast	Heater closet and electrical room	700 sq. ft.	No	No
9" dark tan with brown floor tile and mastic	W0401, W0501	5% Chrysotile (file) 3% Chrysotile (mastic)	Previously sampled Cape Environmental 1993	Electrical room 4	40 sq. ft.	No	Yes
Smooth plaster	W3202, W3204	N/A	Previously sampled Cape Environmental 1993	Material not observed as stated in the previous survey	N/A	N/A	N/A
Smooth plaster ceiling	W2201, W2204	N/A	Previously sampled Cape Environmental 1993	Material not observed as stated in the previous survey	N/A	N/A	N/A
4 inch brown cove base with glue	7897	None detected	Electrical room, northeast	Electrical room	20 ln. ft.	No	Yes
Window putty	7898	2% Chrysotile	North center	Exterior windows	200 ln. ft.	No	Yes
Drywall	7899	None detected	Nurses office, northwest	All dividing walls, except electrical room and heater closets	3,800 sq. ft.	No	No
Drywall joint compound	7900	None detected	Nurses office, northwest	All dividing walls, except electrical room and heater closets	3,800 sq. ft.	No	No
Drywall joint compound	7901	None detected	Main office, southwest	All dividing walls, except electrical room and heater closets	3,800 sq. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 2 of 2

Building D, Administration

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
Drywall joint compound	7902	None detected	Hall, northeast	All dividing walls, except electrical room and heater closets	3,800 sq. ft.	No	No
Drywall joint compound	7903	None detected	Work room, southeast	All dividing walls, except electrical room and heater closets	3,800 sq. ft.	No	No
Drywall joint compound	7904	None detected	Work room restrooms entrance	All dividing walls, except electrical room and heater closets	3,800 sq. ft.	No	No
4 inch gray cove base and glue	Same as #7802	None detected	Building A	Nurses office, audio testing room, work room, principals office, main office and hall	280 ln. ft.	No	No
HVAC duct tape	Same as #7804	None detected	Building A	Heater room	5 sq. ft.	No	No
2'x4' fissured ceiling panel	Same as #7803	None detected	Building A	Nurses office, audio testing room, work room, main office, principals office and hall	1,800 sq. ft.	Yes	No
Heater unit gasket	NA	Assumed	Not sampled to avoid damage	Heater room	1 each	No	No
Gravel roof core	N/A	Assumed	Not sampled to avoid damage	Roof	1,800 sq. ft.	No	No
Roof mastic	NA	Assumed	Not sampled to avoid damage	Roof penetration	25 sq. ft.	No	No
12"x12" light green floor tile and glue	Same as #7799	None detected	Building A	Principal office, main office, nurses office, work room, hall	1,400 sq. ft.	No	No
12"x12" straight peg hole ceiling tile and mastic	W1502, W1603	None detected	Previously sampled Cape Environmental 1993	Not observed/Removed	N/A	N/A	N/A
Rough plaster ceiling	W2005	None detected	Previously sampled Cape Environmental 1993	Removed/Replaced with drywall	N/A	N/A	N/A
12" random peg hole ceiling tile (old)	W1701, W1702, W1703	None detected	Previously sampled Cape Environmental 1993	Not observed	N/A	N/A	N/A

MATERIAL INVENTORY **ASBESTOS**

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Building E

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
Stucco	7838	None detected	Northwest	Exterior walls	1,950 sq. ft	No	No
Stucco	7839	None detected	Northeast	Exterior walls	1,950 sq. ft	No	No
Stucco	7840	None detected	Entrance to computer room	Exterior walls	1,950 sq. ft	No	No
Stucco	7841	None detected	Southeast	Exterior walls	1,950 sq. ft	No	No
Stucco	7842	None detected	Southwest	Exterior walls	1,950 sq. ft	No	No
Exterior stucco ceiling	W2501-W2505	None detected	Previously sampled Cape Environmental 1993	Overhang ceilings-entire site	2,900 sq. ft	No	No
Gypsum wall with joint compound	W1005	None detected	Previously sampled Cape Environmental 1993	Office 2, east wall computer room walls	480 sq. ft	No	No
Drywall	7843	None detected	Office 2, east center	Office 2, east wall computer room walls	480 sq. ft	No	No
Drywall joint compound	7844	None detected	Office 2, east center	Office 2, east wall computer room walls	480 sq. ft	No	No
Drywall joint compound	7845	None detected	Computer room, southeast	Office 2, east wall computer room walls	480 sq. ft	No	No
Drywall joint compound	7846	None detected	Computer room, south center	Office 2, east wall computer room walls	480 sq. ft	No	No
Window putty	W3001	4% Chrysotile	Previously sampled Cape Environmental 1993	Exterior windows	800 ln. ft.	No	Yes
Rough plaster walls	W2104	None detected	Previously sampled Cape Environmental 1993	Library and room, east and west walls only (north and south walls are concrete)	2,950 sq. ft	No	No
Rough plaster walls	W2105	None detected	Previously sampled Cape Environmental 1993	Library and room, east and west walls only (north and south walls are concrete)	2,950 sq. ft	No	No
Rough plaster walls	7847	None detected	Library, northwest	Library and room, east and west walls only (north and south walls are concrete)	2,950 sq. ft	No	No
Rough plaster walls	7848	None detected	Room 7, west center	Library and room, east and west walls only (north and south walls are concrete)	2,950 sq. ft	No	No
Rough plaster walls	7849	None detected	Room 7, southeast	Library and room, east and west walls only (north and south walls are concrete)	2,950 sq. ft	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 2 of 2

Building E

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
Smooth plaster walls	W2301	None detected	Previously sampled Cape Environmental 1993	Office 1, 2 and heater closet	2,400 sq. ft	No	No
Smooth plaster walls	7850	None detected	Office 1, northeast	Office 1, 2 and heater closet	2,400 sq. ft	No	No
Smooth plaster walls	7851	None detected	Office 2, northwest	Office 1, 2 and heater closet	2,400 sq. ft	No	No
Smooth plaster walls	7852	None detected	Office 2, southeast	Office 1, 2 and heater closet	2,400 sq. ft	No	No
Smooth plaster walls	7853	None detected	Heater closet, southwest	Office 1, 2 and heater closet	2,400 sq. ft	No	No
12" random peg hole wall tile glue	W1203	Assumed	N/A	Heater closet	100 sq. ft	No	No
Carpet glue	7854	None detected	Room 7, center	Room 7	900 sq. ft	No	No
Brown floor tile and mastic	7855	5% Chrysotile (tile) 2% Chrysotile (mastic)	Room 7, center	Room 7 under carpet	900 sq. ft	No	No
12"x12" gray speckled floor tile	7856	None detected	Office 2, southwest	Office 1 and 2	700 sq. ft	No	No
12"x12" light green floor tile and glue	Same as #7999	None detected	Building A	Room 7	250 sq. ft	No	No
4 inch dark green cove base and glue	Same as #7800	None detected	Building A	Library, office 1, 2 computer room	400 ln. ft.	No	No
4 inch gray cove base and glue	Same as #7802	None detected	Building A	Room 7	80 ln. ft.	No	No
HVAC duct tape	Same as #7804	None detected	Building A	Heater closet	2 sq. ft	No	No
2'x4' fissured ceiling panel	Same as #7803	None detected	Building A	Library, room 7	3,000 sq. ft	Yes	No
Heater unit gasket	NA	Assumed	Not sampled to avoid damage	Heater closet	1 each	No	No
Gravel roof core	NA	Assumed	Not sampled to avoid damage	Roof	3,400 sq. ft	No	No
Roof mastic	NA	Assumed	Not sampled to avoid damage	Roof penetration	20 sq. ft	No	No
Chalk board (new, dry erase)	NA	Assumed	Not sampled to avoid damage	Room 7	2 each	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 1 of 2

Building F

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
Stucco	7857	None detected	Northeast	Exterior walls	2,200 sq. ft.	No	No
Stucco	7858	None detected	Southeast	Exterior walls	2,200 sq. ft.	No	No
Stucco	7859	None detected	Northwest	Exterior walls	2,200 sq. ft.	No	No
Stucco	7860	None detected	Southwest	Exterior walls	2,200 sq. ft.	No	No
Stucco	7861	None detected	West center	Exterior walls	2,200 sq. ft.	No	No
Rough plaster walls	W2102	None detected	Previously sampled Cape Environmental 1993	Classrooms, janitors closet and mechanical room	2,500 sq. ft.	No	No
Rough plaster walls	W2106	None detected	Previously sampled Cape Environmental 1993	Classrooms, janitors closet and mechanical room	2,500 sq. ft.	No	No
Rough plaster walls	W2107	None detected	Previously sampled Cape Environmental 1993	Classrooms, janitors closet and mechanical room	2,500 sq. ft.	No	No
Rough plaster walls	7866	None detected	Room 9, northwest	Classrooms, janitors closet and mechanical room	2,500 sq. ft.	No	No
Rough plaster walls	7867	None detected	Mechanical room, north center	Classrooms, janitors closet and mechanical room	2,500 sq. ft.	No	No
Window putty	W3003	7% Chrysotile	Previously sampled Cape Environmental 1993	Exterior windows	300 ln. ft.	No	No
Smooth plaster ceiling	W2203	None detected	Previously sampled Cape Environmental 1993	Boy's restrooms and girl's restrooms, ceilings	500 sq. ft.	No	No
Smooth plaster ceiling	7862	None detected	Boy's, northwest	Boy's restrooms and girl's restrooms, ceilings	500 sq. ft.	No	No
Smooth plaster ceiling	7863	None detected	Girl's, northwest	Boy's restrooms and girl's restrooms, ceilings	500 sq. ft.	No	No
Smooth plaster wall	W2303	None detected	Previously sampled Cape Environmental 1993	Boy's and girl's walls	950 sq. ft.	No	No
Smooth plaster wall	7864	None detected	Girl's, north center	Boy's and girl's walls	950 sq. ft.	No	No
Smooth plaster wall	7865	None detected	Boy's, southeast	Boy's and girl's walls	950 sq. ft.	No	No
Brown floor tile and mastic	7868	5% Chrysotile (tile) 5% Chrysotile (mastic)	Room 10, center	Rooms 9 and 10 under carpet	1,600 sq. ft.	No	No
12" straight peg hole ceiling and glue	7869	None detected	Room 9, south center	Rooms 8, 9, 10 north and south perimeter and residual ceiling tiles	700 sq. ft.	Yes	Yes
Drywall	7870	None detected	Room 9, center	Rooms 8, 9, 10 north and south perimeter and residual drywall	700 sq. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 2 of 2

Building F

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
12"x12" light green floor tile and glue	Same as #7999	None detected	Building A	Rooms 8, 9, 10	750 sq. ft.	No	No
4 inch dark green cove base and glue	Same as #7800	None detected	Building A	Rooms 8, 9, 10 carpeted area	240 ln. ft.	No	No
4 inch gray cove base and glue	Same as #7802	None detected	Building A	Rooms 8, 9, 10 tiled area	90 ln. ft.	No	No
HVAC duct tape	Same as #7804	None detected	Building A	Mechanical room	5 sq. ft.	No	No
Carpet glue	Same as #7854	None detected	Building E	Rooms 8, 9, 10	2,700 sq. ft.	No	No
Carpet glue	Same as #7798	None detected	Building A	Rooms 8, 9, 10	2,700 sq. ft.	No	No
2x4 fissured ceiling panel	Same as #7803	None detected	Building A	Rooms 8, 9, 10	3,400 sq. ft.	Yes	No
Heater unit gasket	NA	Assumed	Not sampled to avoid damage	Mechanical room	1 each	No	No
Gravel roof core	NA	Assumed	Not sampled to avoid damage	Roof	4,200 sq. ft.	No	No
Roof mastic	NA	Assumed	Not sampled to avoid damage	Roof penetration	200 sq. ft.	No	No
Chalk board	NA	Assumed	Non -suspect ACM (dry-erase)	Rooms 8, 9, 10	6 each	N/A	N/A
Ceiling tile	7869	None detected	Previously sampled Cape Environmental 1993	Not observed/Removed	N/A	N/A	N/A
Drywall	7870	None detected	Previously sampled Cape Environmental 1993	Not observed/Removed	N/A	N/A	N/A

MATERIAL INVENTORY **ASBESTOS**

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 1 of 4

Building G, Auditorium

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAG E
Stucco	7905	None detected	Northeast	Exterior walls	4,500 sq. ft.	No	No
Stucco	7906	None detected	Northwest	Exterior walls	4,500 sq. ft.	No	No
Stucco	7907	None detected	South center	Exterior walls	4,500 sq. ft.	No	No
Stucco	7908	None detected	Southeast	Exterior walls	4,500 sq. ft.	No	No
Stucco	7909	<1% Chrysotile	Southwest	Exterior walls	4,500 sq. ft.	No	No
Stucco	W2406-W2607	None detected	Previously sampled Cape Environmental 1993	Exterior walls	4,500 sq. ft.	No	No
Stucco	W2501-W2505	None detected	Previously sampled Cape Environmental 1993	Overhang ceilings	2,900 sq. ft.	No	No
Window putty	7910	<1% Chrysotile	Southwest	Exterior window on west and south sides	300 ln. ft.	No	Yes
Gray with black dots floor sheeting	7911	None detected	Kitchen, south center	Kitchen	1,200 sq. ft.	No	No
12" off-white floor tile and mastic	W0301	5% Chrysotile (tile) None detected (mastic)	Previously sampled Cape Environmental 1993	Auditorium	2,500 sq. ft.	No	No
9" tan floor tile and mastic	W0101	4% Chrysotile (tile) None detected (mastic)	Previously sampled Cape Environmental 1993	Kitchen	300 sq. ft.	No	No
9" dark tan floor tile and mastic	W0201	5% Chrysotile (tile) 2% Chrysotile (mastic)	Previously sampled Cape Environmental 1993	Janitors room	80 sq. ft.	No	Yes
Rough plaster ceiling	W2001	None detected	Previously sampled Cape Environmental 1993	Auditorium, kitchen, storage room, Teacher's work room, mechanical room	1,900 sq. ft.	No	No
Rough plaster ceiling	W2002	None detected	Previously sampled Cape Environmental 1993	Auditorium, kitchen, storage room, Teacher's work room, mechanical room	1,900 sq. ft.	No	No
Rough plaster ceiling	W2003	None detected	Previously sampled Cape Environmental 1993	Auditorium, kitchen, storage room, Teacher's work room, mechanical room	1,900 sq. ft.	No	No
Rough plaster ceiling	W2004	None detected	Previously sampled Cape Environmental 1993	Auditorium, kitchen, storage room, Teacher's work room, mechanical room	1,900 sq. ft.	No	No
Rough plaster ceiling	7912	None detected	Mechanical room, northwest	Auditorium, kitchen, storage room, Teacher's work room, mechanical room	1,900 sq. ft.	No	No

MATERIAL INVENTORY **ASBESTOS**

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 2 of 4

Building G, Auditorium

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
Rough plaster walls	W2103	None detected	Previously sampled Cape Environmental 1993	Storage room, mechanical room	1,900 sq. ft.	No	No
Rough plaster walls	7913	None detected	Mechanical room, north center	Storage room, mechanical room	1,900 sq. ft.	No	No
Rough plaster walls	7914	None detected	Mechanical room, southeast	Storage room, mechanical room	1,900 sq. ft.	No	No
Rough plaster walls	7915	None detected	Storage room, northwest	Storage room, mechanical room	1,900 sq. ft.	No	No
Rough plaster walls	7916	None detected	Storage room, southeast	Storage room, mechanical room	1,900 sq. ft.	No	No
Smooth plaster ceiling	W2202	None detected	Previously sampled Cape Environmental 1993	Teacher's dining room and restrooms	1,500 sq. ft.	No	No
Smooth plaster ceiling	W2205	None detected	Previously sampled Cape Environmental 1993	Teacher's dining room and restrooms	1,500 sq. ft.	No	No
Smooth plaster ceiling	7917	None detected	Teacher's dining room, northeast	Teacher's dining room and restrooms	1,500 sq. ft.	No	No
Smooth plaster ceiling	7918	None detected	Teacher's dining room, southwest	Teacher's dining room and restrooms	1,500 sq. ft.	No	No
Smooth plaster ceiling	7919	None detected	Boy's restroom, northwest	Teacher's dining room and restrooms	1,500 sq. ft.	No	No
Smooth plaster walls	7920	None detected	Teachers dining room, southwest	Teacher's dining room, kitchen, teacher's work room, auditorium and restrooms, kiln room, stage area	8,500 sq. ft.	No	No
Smooth plaster walls	7921	None detected	Kitchen, south center	Teacher's dining room, kitchen, teacher's work room, auditorium and restrooms, kiln room, stage area	8,500 sq. ft.	No	No
Smooth plaster walls	7922	None detected	Boy's restroom, southeast	Teacher's dining room, kitchen, teacher's work room, auditorium and restrooms, kiln room, stage area	8,500 sq. ft.	No	No
Smooth plaster walls	7923	None detected	Stage area, northwest	Teacher's dining room, kitchen, teacher's work room, auditorium and restrooms, kiln room, stage area	8,500 sq. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 3 of 4

Building G, Auditorium

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
Smooth plaster walls	7924	None detected	Auditorium, east center	Teacher's dining room, kitchen, teacher's work room, auditorium and restrooms, kiln room, stage area	8,500 sq. ft.	No	No
Smooth plaster walls	7925	None detected	Kiln room, northwest	Teacher's dining room, kitchen, teacher's work room, auditorium and restrooms, kiln room, stage area	8,500 sq. ft.	No	No
Smooth plaster walls	W2305	None detected	Previously sampled Cape Environmental 1993	Teacher's dining room, kitchen, teacher's work room, auditorium and restrooms, kiln room, stage area	8,500 sq. ft.	No	No
Drywall	7926	None detected	Storage area, center	Storage area (no joint compound)	60 sq. ft.	No	No
4 inch light gray cove base and glue	7927	None detected	Dining room, northeast	Dining room	90 ln. ft.	No	No
12"x12" pinkish with dark spots floor tile	7928	None detected	Dining room, east center	Dining room, 70	700 sq. ft.	No	No
Hot brick	7929	None detected	Kiln room, northeast	Kiln room, kiln unit	30 sq. ft.	No	No
4 inch brown cove base and glue	7930	None detected	Auditorium, west center	Auditorium	170 ln. ft.	No	No
Gravel roof core	NA	Assumed	Not sampled to avoid damage	Roof	4,900 sq. ft.	No	No
Roof mastic	NA	Assumed	Not sampled to avoid damage	Roof penetration	50 sq. ft.	No	No
Heater unit gasket	NA	Assumed	Not sampled to avoid damage	Mechanical room	1 each	No	No
Chalkboard mastic	N/A	Assumed	Not sampled to avoid damage	All classrooms	240 sq. ft.	No	No
12" straight peg hole ceiling tile and mastic	W1501, W1602	None detected	Previously sampled Cape Environmental 1993	Kitchen, SE storage area, teacher's work area, kiln room	3,000 sq. ft.	No	No
12" fissured ceiling tile	W1801-W1803	None detected	Previously sampled Cape Environmental 1993	Auditorium	1,900 sq. ft.	No	No
Mastic associated with 12" fissured ceiling tile	W1901-W1903	None detected	Previously sampled Cape Environmental 1993	Auditorium	1,900 sq. ft.	No	No
HVAC exhaust vent pipe joint tape	W3202	None detected	Previously sampled Cape Environmental 1993	Boiler room	20 sq. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
 PROJECT NO: 107-0008
 PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 4 of 4

Building G, Auditorium

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAG E
Pipe insulation	W3301	None detected	Previously sampled Cape Environmental 1993	Outside kitchen	<6 ln. ft.	No	No
Pipe fitting insulation	W3401	None detected	Previously sampled Cape Environmental 1993	Outside kitchen	<6 ln. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 1 of 2

Building H

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
Exterior wall stucco	W2404	None detected	Previously sampled Cape Environmental 1993	Exterior walls	4,000 sq. ft.	No	No
Exterior wall stucco	W2405	None detected	Previously sampled Cape Environmental 1993	Exterior walls	4,000 sq. ft.	No	No
Exterior wall stucco	7871	None detected	Northeast	Exterior walls	4,000 sq. ft.	No	No
Exterior wall stucco	7872	None detected	South center	Exterior walls	4,000 sq. ft.	No	No
Exterior wall stucco	7873	None detected	Northwest	Exterior walls	4,000 sq. ft.	No	No
Exterior ceiling stucco	W2501-W2505	None detected	Previously sampled Cape Environmental 1993	Overhang ceilings	2,900 sq. ft.	No	No
Rough plaster wall	W2101	<1% Chrysotile	Previously sampled Cape Environmental 1993	Janitor's, electrical rooms	200 sq. ft.	No	No
Rough plaster ceiling	W2006	None detected	Previously sampled Cape Environmental 1993	Janitor's, electrical rooms	800 sq. ft.	No	No
Rough plaster wall	7874	None detected	Custodian room, northeast	Janitor's, electrical rooms	800 sq. ft.	No	No
Rough plaster wall	7875	None detected	Electrical room, south center	Janitor's, electrical rooms	800 sq. ft.	No	No
12" straight peg hole tile and mastic	W1503	None detected	Previously sampled Cape Environmental 1993	Rooms 1-4 - above ceiling panels	800 sq. ft.	No	No
Window putty	7876	2% Chrysotile	North center	Exterior windows	2,800 in. ft.	No	Yes
Drywall	7877	None detected	Room 2, southwest	Heater closets and south side soffits rooms 1-4	950 sq. ft.	No	No
Drywall joint compound	7878	None detected	Room 2, southwest	Heater closets and south side soffits rooms 1-4	950 sq. ft.	No	No
Drywall joint compound	7879	None detected	Room 4, southwest	Heater closets and south side soffits rooms 1-4	950 sq. ft.	No	No
Drywall joint compound	7880	None detected	Room 1, southwest	Heater closets and south side soffits rooms 1-4	950 sq. ft.	No	No
Gypsum ceiling board	W1101	None detected	Previously sampled Cape Environmental 1993	Above ceiling panels in rooms 1-4 (no joint compound observed)	3,500 sq. ft.	No	No
Smooth plaster	7881	None detected	Room 4, northwest	Classrooms 1-4, boy's and girl's restrooms	7,600 sq. ft.	No	No
Smooth plaster	7882	None detected	Room 2, northeast	Classrooms 1-4, boy's and girl's restrooms	7,600 sq. ft.	No	No
Smooth plaster	7883	None detected	Room 1, south center	Classrooms 1-4, boy's and girl's restrooms	7,600 sq. ft.	No	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
PROJECT NO: 107-0008
PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 2 of 2

Building H

MATERIAL	SAMPLE ¹⁰¹ NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE DAMAGE
Smooth plaster	7884	None detected	Boy's restrooms, northeast	Classrooms 1-4, boy's and girl's restrooms	7,600 sq. ft.	No
Smooth plaster	7885	None detected	Girl's restrooms, southwest	Classrooms 1-4, boy's and girl's restrooms	7,600 sq. ft.	No
Smooth plaster	7886	None detected	Room 3, south center	Classrooms 1-4, boy's and girl's restrooms	7,600 sq. ft.	No
Smooth plaster	7887	None detected	Room 3, northwest	Classrooms 1-4, boy's and girl's restrooms	7,600 sq. ft.	No
Brown floor tile and mastic	7888	7% Chrysotile (tile) 2% Chrysotile (mastic)	Room 4, center	Rooms 1-4 under carpet	2,800 sq. ft.	No
12"x12" light green floor tile and glue	Same as #7999	None detected	Building A	Rooms 1-4	1,000 sq. ft.	No
4 inch dark green cove base and glue	Same as #7800	None detected	Building A	Rooms 1-4 carpet area	280 ln. ft.	No
4 inch gray cove base and glue	Same as #7802	None detected	Building A	Room 1-4 tiled area	120 ln. ft.	No
HVAC duct tape	Same as #7804	None detected	Building A	Rooms 1-4 heater closets	4 each	No
Carpet glue	Same as #7854	None detected	Building E	Rooms 1-4	2,700 sq. ft.	No
Carpet glue	Same as #7798	None detected	Building A	Rooms 1-4	900 sq. ft.	No
Heater unit	NA	Assumed	Not sampled to avoid damage	Heater rooms in rooms 1-4	4 each	No
Gravel roof core	NA	Assumed	Not sampled to avoid damage	Roof	5,200 sq. ft.	No
Roof mastic	NA	Assumed	Not sampled to avoid damage	Roof penetrations	40 ln. ft.	No
Chalkboard (dry erase)	NA	Assumed	Not sampled to avoid damage	Rooms 1-4	8 each	No
Sink undercoating	W2801 - W2803	10%-15% Chrysotile	Previously sampled Cape Environmental 1993	Rooms 1-4	4 each	No

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
 PROJECT NO: 107-0008
 PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Portables 21, 22, 23

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
Drywall	7931	None detected	Portable 23, northeast	Portables 21, 22, 23 behind fiberboards	3,600 sq. ft.	No	No
2'x4' fissured ceiling panel	7932	None detected	Portable 21, center	Portable 21	900 sq. ft.	Yes	No
4 inch dark blue cove base and glue	7933	None detected	Portable 23, southwest	Portables 21, 22, 23	240 ln. ft.	No	No
Carpet glue	7934	None detected	Portable 23, southwest	Portables 21, 22, 23	3,400 sq. ft.	No	No
12"x12" light blue speckled floor tile	7935	None detected	Portable 22, southwest	Portable 22 at southwest and southeast sides	30 sq. ft.	No	No

Note: Portables 22 and 23, 2'x4' ceiling panels consist of fiber glass. Exterior walls consist of wood, roof consists of metal sheeting

MATERIAL INVENTORY ASBESTOS

CLIENT: Santa Monica-Malibu Unified School District
 PROJECT NO: 107-0008
 PROJECT NAME: Webster Elementary School - 3602 Winter Canyon Road, Malibu, California

Page 1 of 1

Walkways

MATERIAL	SAMPLE NUMBER	ASBESTOS CONTENT	SAMPLE LOCATION	MATERIAL LOCATION	APPROX. QTY.	FRIABLE	DAMAGE
Walkway stucco ceiling	W2501	None Detected	Previously sampled Cape Environmental 1993	All walkways	4,800 sq. ft.	No	No
Walkway stucco ceiling	W2502	None Detected	Previously sampled Cape Environmental 1993	All walkways	4,800 sq. ft.	No	No
Walkway stucco ceiling	W2503	None Detected	Previously sampled Cape Environmental 1993	All walkways	4,800 sq. ft.	No	No
Walkway stucco ceiling	W2504	None Detected	Previously sampled Cape Environmental 1993	All walkways	4,800 sq. ft.	No	No
Walkway stucco ceiling	W2505	None Detected	Previously sampled Cape Environmental 1993	All walkways	4,800 sq. ft.	No	No
Gravel roof core	NA	Assumed	Not sampled to avoid damage	Walk way roof	5,000 sq. ft.	No	No
Roof mastic	NA	Assumed	Not sampled to avoid damage	Walk way roof electrical conduit supports	200 sq. ft.	No	No

APPENDIX B

LABORATORY ANALYSIS REPORT



AmeriSci Los Angeles

24416 SOUTH MAIN STREET • SUITE 308

CARSON, CA 90745

TEL: (310) 834-4868 • FAX: (310) 834-4772

March 8, 2007

CTL Environmental Services

Attn: Cesar Ruvalcaba

24404 S. Vermont Ave.

Suite 307

Harbor City, CA 90710

RE: CTL Environmental Services

Job Number 907031027

P.O. # 30918

107-0008; Webster E.S; SMMUSD

Dear Cesar Ruvalcaba:

Enclosed are the results for polarized light microscopy analysis (PLM) of the following CTL Environmental Services samples received at AmeriSci on Thursday, March 01, 2007, for a 5 day turnaround:

Sample ID 7785 through 7935

The 151 samples contained in Ziplock Bags were shipped to AmeriSci via Hand delivery. These samples were prepared and analyzed according to the EPA Interim Method (EPA 600/M4-82-020 per 40 CFR 763, subpt F, App. A). The samples were evaluated for homogeneity by low power stereomicroscopy. Asbestos fibers were identified by PLM and dispersion staining through the determination of the required optical properties including: morphology, color, pleochroism, refractive indices, birefringence, extinction and sign of elongation. The required analytical information, analysis results, analyst signature and laboratory identification is contained in the Analyst's Report.

This report relates ONLY to the sample analysis expressed as percent asbestos. AmeriSci assumes no responsibility for customer supplied data such as "sample type", "location", or "area sampled". This report must not be used to claim product endorsement by AmeriSci, NVLAP or any agency of the U. S. Government. The National Institute of Standards and Technology Accreditation requirements mandate that this report must not be reproduced, except in full without the written approval of the laboratory. This report may contain specific data not covered by NVLAP or ELAP accreditations respectively, if so identified in relevant footnotes.

AmeriSci appreciates this opportunity to serve your organization. Please contact us for any further assistance or with any questions.

Sincerely,

A handwritten signature in black ink, appearing to read "Mary S. David".

Mary S. David
Client Services Manager

**AmeriSci Los Angeles**

24416 S. Main Street, Ste 308
Carson, California 90745
TEL: (310) 834-4868 • FAX: (310) 834-4772

PLM Bulk Asbestos Report

CTL Environmental Services
Attn: Cesar Ruvalcaba
24404 S. Vermont Ave.
Suite 307
Harbor City, CA 90710

Date Received 03/01/07

Date Examined 03/08/07

AmeriSci Job No. 907031027

P.O. # 30918

Page 1 of 29

RE 107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7785 1	907031027-01 Location: Stucco	Yes	Trace (<1 %) (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige/Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Chrysotile <1. % Other Material: Non-fibrous 100 %			
7786 1	907031027-02 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7787 1	907031027-03 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige/Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7788 1	907031027-04 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7789 2	907031027-05 Location: Plaster	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7790 2	907031027-06 Location: Plaster	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
791 2	907031027-07 Location: Plaster	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7792 2	907031027-08 Location: Plaster	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7793 2	907031027-09 Location: Plaster	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7794	907031027-10 Location: Drywall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige/Brown, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 15 %, Non-fibrous 85 %			
7795 3	907031027-11 Location: Drywall Joint Comp.	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7796 3	907031027-12 Location: Drywall Joint Comp.	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7797 3	907031027-13 Location: Drywall Joint Comp.	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 10 %, Non-fibrous 90 %			
7798	907031027-14 Location: Carpet Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Cream, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Synthetic fibers 10 %, Non-fibrous 90 %			
7799	907031027-15L1 Location: 12X12 Light Green Speckled Flr Tile & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Homogeneous, Non-Fibrous, Floor Tile Asbestos Types: Other Material: Non-fibrous 100 %			
7799	907031027-15L2 Location: 12X12 Light Green Speckled Flr Tile & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Yellow, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Cellulose 3 %, Non-fibrous 97 %			
7800	907031027-16L1 Location: 4in Dark Green Covebase & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Blue, Homogeneous, Non-Fibrous, Cove Base Asbestos Types: Other Material: Non-fibrous 100 %			

See Reporting notes on last page

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7800	907031027-16.2 Location: 4in Dark Green Covebase & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Cream, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Non-fibrous 100 %			
7801	907031027-17L1 Location: 4in Brown Cove Base & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Black, Homogeneous, Non-Fibrous, Cove Base Asbestos Types: Other Material: Non-fibrous 100 %			
7801	907031027-17L2 Location: 4in Brown Cove Base & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Cream, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Non-fibrous 100 %			
7802	907031027-18L1 Location: 4in Gray Cove Bae & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Homogeneous, Non-Fibrous, Cove Base Asbestos Types: Other Material: Non-fibrous 100 %			
7802	907031027-18L2 Location: 4in Gray Cove Bae & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Cream, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Non-fibrous 100 %			
7803	907031027-19 Location: 2X4 Fissured Ceiling Panel	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 75 %, Fibrous glass 5 %, Non-fibrous 20 %			

See Reporting notes on last page

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7804	907031027-20 Location: HVAC Duct Tape Gray	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7805	907031027-21 Location: Window Putty	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7830	907031027-22 Location: Drywall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige/Brown, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 15 %, Non-fibrous 85 %			
7831 4	907031027-23 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7832 4	907031027-24 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 10 %, Non-fibrous 90 %			
7833 4	907031027-25 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7834	907031027-26	No	NAD
Location: Drywall			(by CVES)
Description: Beige, Heterogeneous, Fibrous, Bulk Material			by Raymundo Orozco
Asbestos Types:			on 03/08/07
Other Material: Cellulose 10 %, Non-fibrous 90 %			
7835	907031027-27	No	NAD
5	Location: Drywall Joint Compound		(by CVES)
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material			by Raymundo Orozco
Asbestos Types:			on 03/08/07
Other Material: Cellulose 5 %, Non-fibrous 95 %			
7836	907031027-28.1	No	NAD
5	Location: Drywall Joint Compound		(by CVES)
Description: Beige/Brown, Heterogeneous, Fibrous, Drywall			by Raymundo Orozco
Asbestos Types:			on 03/08/07
Other Material: Cellulose 15 %, Non-fibrous 85 %			
7836	907031027-28.2	No	NAD
5	Location: Drywall Joint Compound		(by CVES)
Description: Beige, Heterogeneous, Fibrous, Bulk Material			by Raymundo Orozco
Asbestos Types:			on 03/08/07
Other Material: Cellulose 5 %, Non-fibrous 95 %			
7837	907031027-29	Yes	3 %
5	Location: Drywall Joint Compound		(by CVES)
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material			by Raymundo Orozco
Asbestos Types: Chrysotile 3.0 %			on 03/08/07
Other Material: Non-fibrous 97 %			
7822	907031027-30	No	NAD
6	Location: Stucco		(by CVES)
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material			by Raymundo Orozco
Asbestos Types:			on 03/08/07
Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7823 6	907031027-31 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7824 6	907031027-32 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7825 6	907031027-33 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7826 7	907031027-34 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7827 7	907031027-35 Location: Drywall Joint Compound	Yes	3 % (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Chrysotile 3.0 % Other Material: Non-fibrous 97 %			
7828 7	907031027-36 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 10 %, Non-fibrous 90 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7829	907031027-37	No	NAD
Location: Window Putty			(by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Homogeneous, Non-Fibrous, Bulk Material			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
7806	907031027-38	No	NAD
8	Location: Stucco		(by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
7807	907031027-39	No	NAD
8	Location: Stucco		(by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
7808	907031027-40	No	NAD
8	Location: Stucco		(by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
7809	907031027-41	No	NAD
8	Location: Stucco		(by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
7810	907031027-42	Yes	Trace (<1 %)
Location: Window Putty			(by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Homogeneous, Non-Fibrous, Bulk Material			
Asbestos Types: Chrysotile <1. %			
Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7811	907031027-43	No	NAD
Location: 12" Random Pinhole Ceiling Tile Glue			(by CVES) by Raymundo Orozco on 03/08/07
Description: Beige/Brown, Heterogeneous, Fibrous, Bulk Material			
Asbestos Types:			
Other Material: Cellulose 10 %, Fibrous Talc 3 %, Non-fibrous 87 %			
7812	907031027-44	No	NAD
9	Location: Rough Plaster		(by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
7813	907031027-45	No	NAD
9	Location: Rough Plaster		(by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
7814	907031027-46	No	NAD
9	Location: Rough Plaster		(by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material			
Asbestos Types:			
Other Material: Non-fibrous 100 %			
7815	907031027-47	Yes	2 %
10	Location: Drywall Joint Compound		(by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material			
Asbestos Types: Chrysotile 2.0 %			
Other Material: Non-fibrous 98 %			
7816	907031027-48		NA/PS
10	Location: Drywall Joint Compound		
Description: Bulk Material			
Asbestos Types:			
Other Material:			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7817 10	907031027-49 Location: Drywall Joint Compound		NA/PS
Description: Bulk Material Asbestos Types: Other Material:			
7818	907031027-50 Location: Drywall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 10 %, Non-fibrous 90 %			
7819 11	907031027-51 Location: Drywall Joint Compound	Yes	2 % (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Chrysotile 2.0 % Other Material: Non-fibrous 98 %			
7820 11	907031027-52 Location: Drywall Joint Compound		NA/PS
Description: Bulk Material Asbestos Types: Other Material:			
7821 11	907031027-53 Location: Drywall Joint Compound		NA/PS
Description: Bulk Material Asbestos Types: Other Material:			
7889 12	907031027-54 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

See Reporting notes on last page

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7890 12	907031027-55 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7891 12	907031027-56 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7892 12	907031027-57 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7893 12	907031027-58 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7894 13	907031027-59 Location: Rough Plaster Ceiling	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7895 13	907031027-60 Location: Rough Plaster Ceiling	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7896 13	907031027-61 Location: Rough Plaster Ceiling	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7897	907031027-62L1 Location: 4in Brown Cove Base & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Cove Base Asbestos Types: Other Material: Non-fibrous 100 %			
7897	907031027-62L2 Location: 4in Brown Cove Base & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Brown, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Fibrous Talc 5 %, Non-fibrous 95 %			
7898	907031027-63 Location: Window Putty	Yes	2 % (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Chrysotile 2.0 % Other Material: Non-fibrous 98 %			
7899	907031027-64 Location: Drywall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 3 %, Non-fibrous 97 %			
7900 14	907031027-65 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 3 %, Non-fibrous 97 %			

See Reporting notes on last page

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7901 14	907031027-66 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7902 14	907031027-67 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7903 14	907031027-68 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7904 14	907031027-69 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7838 15	907031027-70 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7839 15	907031027-71 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Tan, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7840 15	907031027-72 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Tan, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7841 15	907031027-73 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7842 15	907031027-74 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Tan, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7843	907031027-75 Location: Drywall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 10 %, Non-fibrous 90 %			
7844 17	907031027-76 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7845 17	907031027-77 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7846 17	907031027-78 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7847 18	907031027-79 Location: Rough Plaster Wall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7848 18	907031027-80 Location: Rough Plaster Wall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7849 18	907031027-81 Location: Rough Plaster Wall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7850 19	907031027-82 Location: Smooth Plaster Wall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7851 19	907031027-83 Location: Smooth Plaster Wall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7852 19	907031027-84 Location: Smooth Plaster Wall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7853 19	907031027-85 Location: Smooth Plaster Wall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7854	907031027-86 Location: Carpet Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Yellow, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Synthetic fibers 15 %, Non-fibrous 85 %			
7855	907031027-87L1 Location: Brown Floor Tile & Mastic	Yes	5 % (by CVES) by Raymundo Orozco on 03/08/07
Description: Brown, Homogeneous, Non-Fibrous, Floor Tile Asbestos Types: Chrysotile 5.0 % Other Material: Non-fibrous 95 %			
7855	907031027-87L2 Location: Brown Floor Tile & Mastic	Yes	2 % (by CVES) by Raymundo Orozco on 03/08/07
Description: Black, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Chrysotile 2.0 % Other Material: Non-fibrous 98 %			
7856	907031027-88L1 Location: 12X12 Gray Speckled Flr. Tile	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Homogeneous, Non-Fibrous, Floor Tile Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7857 20	907031027-89 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7858 20	907031027-90 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7859 20	907031027-91 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7860 20	907031027-92 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7861 20	907031027-93 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7866 21	907031027-94 Location: Rough Plaster Walls	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7867 21	907031027-95 Location: Rough Plaster Walls	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7862 22	907031027-96 Location: Smooth Plaster Ceiling	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7863 22	907031027-97 Location: Smooth Plaster Ceiling	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7864 23	907031027-98 Location: Smooth Plaster Wall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7865 23	907031027-99 Location: Smooth Plaster Wall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7868	907031027-100L1 Location: Brown Floor Tile & Mastic	Yes	5 % (by CVES) by Raymundo Orozco on 03/08/07
Description: Brown, Homogeneous, Non-Fibrous, Floor Tile Asbestos Types: Chrysotile 5.0 % Other Material: Non-fibrous 95 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7868	907031027-100L2 Location: Brown Floor Tile & Mastic	Yes	5 % (by CVES) by Raymundo Orozco on 03/08/07
Description: Black, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Chrysotile 5.0 % Other Material: Non-fibrous 95 %			
7869	907031027-101 Location: 12" Peghole Ceiling Tile & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Brown, Heterogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 10 %, Non-fibrous 90 %			
7870	907031027-102 Location: Drywall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Brown/White, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 15 %, Non-fibrous 85 %			
7905 24	907031027-103 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7906 24	907031027-104 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7907 24	907031027-105 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7908 24	907031027-106 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7909 24	907031027-107 Location: Stucco	Yes	Trace (<1 %) (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Chrysotile <1. % Other Material: Non-fibrous 100 %			
7910	907031027-108 Location: Window Putty	Yes	Trace (<1 %) (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Chrysotile <1. % Other Material: Non-fibrous 100 %			
7911	907031027-109L1 Location: Gray With Black Dots Floor Sheeting	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Fibrous, Linoleum Asbestos Types: Other Material: Fibrous glass 2 %, Synthetic fibers 3 %, Non-fibrous 95 %			
7911	907031027-109L2 Location: Gray With Black Dots Floor Sheeting	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Yellow, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Cellulose 5 %, Non-fibrous 95 %			
7912	907031027-110 Location: Rough Plaster Ceiling	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7913 25	907031027-111 Location: Rough Plaster Walls	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7914 25	907031027-112 Location: Rough Plaster Walls	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7915 25	907031027-113 Location: Rough Plaster Walls	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7916 25	907031027-114 Location: Rough Plaster Walls	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7917 26	907031027-115 Location: Smooth Plaster Ceiling	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7918 26	907031027-116 Location: Smooth Plaster Ceiling	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7919 26	907031027-117 Location: Smooth Plaster Ceiling	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7920 27	907031027-118 Location: Smooth Plaster Wall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7921 27	907031027-119 Location: Smooth Plaster Wall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7922 27	907031027-120 Location: Smooth Plaster Wall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7923 27	907031027-121 Location: Smooth Plaster Wall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7924 27	907031027-122 Location: Smooth Plaster Wall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7925 27	907031027-123 Location: Smooth Plaster Wall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7926	907031027-124 Location: Drywall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Brown/White, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 15 %, Non-fibrous 85 %			
7927	907031027-125L1 Location: 4 In Light Green Cove Base & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Green, Homogeneous, Non-Fibrous, Cove Base Asbestos Types: Other Material: Non-fibrous 100 %			
7927	907031027-125L2 Location: 4 In Light Green Cove Base & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Cream, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Non-fibrous 100 %			
7928	907031027-126 Location: 12X12 Finnish For Tile With Dark Spots	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7929	907031027-127 Location: Hot Brich	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7930	907031027-128L1 Location: 4 In Brown Cove Base & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Black, Homogeneous, Non-Fibrous, Cove Base Asbestos Types: Other Material: Non-fibrous 100 %			
7930	907031027-128L2 Location: 4 In Brown Cove Base & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Brown, Heterogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Wollastonite 5 %, Non-fibrous 95 %			
7877	907031027-129.1 Location: Drywall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Brown/White, Heterogeneous, Fibrous, Drywall Asbestos Types: Other Material: Cellulose 15 %, Non-fibrous 85 %			
7877	907031027-129.2 Location: Drywall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Joint Compound Asbestos Types: Other Material: Non-fibrous 100 %			
7878 28	907031027-130 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7879 28	907031027-131 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7880 28	907031027-132 Location: Drywall Joint Compound	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7881 29	907031027-133 Location: Smooth Plaster	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7882 29	907031027-134 Location: Smooth Plaster	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7883 29	907031027-135 Location: Smooth Plaster	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7884 29	907031027-136 Location: Smooth Plaster	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7885 29	907031027-137 Location: Smooth Plaster	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7886 29	907031027-138 Location: Smooth Plaster	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7887 29	907031027-139 Location: Smooth Plaster	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7888	907031027-140L1 Location: Brown Floor Tile & Mastic	Yes	7 % (by CVES) by Raymundo Orozco on 03/08/07
Description: Brown, Homogeneous, Non-Fibrous, Floor Tile Asbestos Types: Chrysotile 7.0 % Other Material: Non-fibrous 93 %			
7888	907031027-140L2 Location: Brown Floor Tile & Mastic	Yes	2 % (by CVES) by Raymundo Orozco on 03/08/07
Description: Black, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Chrysotile 2.0 % Other Material: Non-fibrous 98 %			
7871 30	907031027-141 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7872 30	907031027-142 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Greeny, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7873 30	907031027-143 Location: Stucco	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7874 31	907031027-144 Location: Rough Plaster Ceiling	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7875 31	907031027-145 Location: Rough Plaster Ceiling	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Heterogeneous, Non-Fibrous, Cementitious, Bulk Material Asbestos Types: Other Material: Non-fibrous 100 %			
7876	907031027-146 Location: Window Putty	Yes	2 % (by CVES) by Raymundo Orozco on 03/08/07
Description: Beige, Homogeneous, Non-Fibrous, Bulk Material Asbestos Types: Chrysotile 2.0 % Other Material: Non-fibrous 98 %			
7931	907031027-147 Location: Drywall	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Brown/White, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 15 %, Non-fibrous 85 %			
7932	907031027-148 Location: 2X4 Fissured Ceiling Panel	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Heterogeneous, Fibrous, Bulk Material Asbestos Types: Other Material: Cellulose 75 %, Fibrous glass 5 %, Non-fibrous 20 %			

PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7933	907031027-149L1 Location: 4 In Dark Blue Cove Base & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Blue, Homogeneous, Non-Fibrous, Cove Base Asbestos Types: Other Material: Non-fibrous 100 %			
7933	907031027-149L2 Location: 4 In Dark Blue Cove Base & Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Cream, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Non-fibrous 100 %			
7934	907031027-150L1 Location: Carpet Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Blue, Heterogeneous, Fibrous, Carpet Asbestos Types: Other Material: Synthetic fibers 90 %, Non-fibrous 10 %			
7934	907031027-150L2 Location: Carpet Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Cream, Homogeneous, Non-Fibrous, Mastic Asbestos Types: Other Material: Synthetic fibers 5 %, Non-fibrous 95 %			
7934	907031027-150L3 Location: Carpet Glue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Brown, Heterogeneous, Fibrous, Flooring Asbestos Types: Other Material: Cellulose 95 %, Non-fibrous 5 %			
7935	907031027-151L1 Location: 12X12 Light Blue	No	NAD (by CVES) by Raymundo Orozco on 03/08/07
Description: Grey, Homogeneous, Non-Fibrous, Floor Tile Asbestos Types: Other Material: Non-fibrous 100 %			


PLM Bulk Asbestos Report

107-0008; Webster E.S; SMMUSD

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
7935	907031027-151L2	No	NAD
Location: 12X12 Light Blue			(by CVES)
Description: Yellow, Homogeneous, Non-Fibrous, Mastic			by Raymundo Orozco
Asbestos Types:			on 03/08/07
Other Material: Cellulose 2 %, Non-fibrous 98 %			

Reporting Notes:

Analyzed By: Raymundo Orozco ; Date Analyzed: 3/8/2007 3/8/07
*NAD = no asbestos detected; Detection Limit <1%; Reporting Limits: CVES = 1%, 400 Pt Ct = 0.25%, 1000 Pt Ct = 0.1%; NA = not analyzed; NA/PS = not analyzed / positive stop; PLM (polarized light microscopy) Bulk Asbestos Analysis by EPA 600/M4-82-020 per 40 CFR 763 (NVLAP Lab #200346-0, CA ELAP Lab #2322); Note: PLM is not consistently reliable in detecting asbestos in floor coverings and similar NOB materials. TEM is currently the only method that can be used to determine if this material can be considered or treated as non-asbestos-containing in New York State (also see EPA Advisory for floor tile, FR 59, 146, 38970, 8/1/94). NIST Accreditation requirements mandate that this report must not be reproduced except in full with the approval of the laboratory. This PLM report relates ONLY to the items tested.

Reviewed By:  3/8/2007

Asbestos Analysis Chain of Custody

AMERISCI JOB #: **907031027**

AMERISCI LOS ANGELES
24416 S Main St. Suite 308
Carson, CA 90745
Phone (310) 834-4868
Fax (310) 834-4772

COMPANY: CTL		ADDRESS:					P.O.#: 30918	
PROJECT INFORMATION		ANALYSIS TYPE	TURNAROUND TIME					AIR FILTER INFORMATION:
			RUSH	24 HR	48 HR	72 HR	5 DAY	
JOB NAME: WEBSTER E.S.		TEM AHERA						MCE
		TEM EPA LEVEL II						PC
JOB NUMBER: 107-0008		TEM DUST MICROVAC						25 mm
		TEM BULK						37 mm
JOB MANAGER: Cesar Ruvalcaba.		PCM						0.45 um
		PLM BULK						0.80 um
JOB DESCRIPTION: SMUSD		PLM 1000 P. C.						TEMP:
		OTHER:						OTHER:

INITIAL RESULTS DELIVERY: ☐ FAX ☐ EMAIL ☐ VERBAL ☐ MAIL ONLY		RETURN SAMPLES YES ☐ NO ☐	
REPORTS TO:		PHONE:	
INVOICE TO:		FAX:	
COMMENTS:		EMAIL:	
		PAGER/CELL:	

SAMPLE ID	SAMPLE LOCATION	START TIME	STOP TIME	TOTAL TIME X LITERS /MIN. = TOTAL VOLUME	DATE COLLECTED
7785	STUCCO			1%	
86					
87					
88					
89	PLASTER				
90					
91					
92					
93					
94	DRYWALL				
95	DRYWALL JOINTS comp.			1%	
96					
97					
98	CARPET GLUE				
99	12X12 LIGHT GREEN SPECKLED FLY TIE & GLUE				
7800	4 in. DARK GREEN COVE BASE & GLUE				
7861	4 in. BROWN COVE BASE & GLUE				
02	4 in. GRAY COVE BASE & GLUE				
03	2X4 FISSIONED W/ 1/4" PANEL				
04	HVAC DUCT TAPE GRAY.				

SAMPLED BY: Victor Sanchez	DATE/TIME:	RECEIVED BY:	DATE/TIME:
RELINQUISHED BY:	DATE/TIME: 3-1-07	RECEIVED BY: [Signature]	DATE/TIME: 3/1/07
RELINQUISHED BY:	DATE/TIME:	RECEIVED IN LAB BY:	DATE/TIME:

Asbestos Analysis Chain of Custody

AMERISCI JOB #:

907031027

AMERISCI LOS ANGELES

24416 S Main St. Suite 308

Carson, CA 90745

Phone (310) 834-4868

Fax (310) 834-4772

COMPANY: CTL		ADDRESS:						P.O.#: 30918		
PROJECT INFORMATION		ANALYSIS TYPE		TURNAROUND TIME					AIR FILTER INFORMATION:	
				RUSH	24 HR	48 HR	72 HR	5 DAY	OTHER	
JOB NAME: Webster ES.		TEM AHERA								MCE
		TEM EPA LEVEL II								PC
JOB NUMBER: 107-0008		TEM DUST MICROVAC								25 mm
		TEM BULK								37 mm
JOB MANAGER: Cesun Kukuluba		PCM								0.45 um
		PLM BULK								0.80 um
JOB DESCRIPTION: SAMUSD		PLM 1000 P. C.								TEMP:
		OTHER:								OTHER:

INITIAL RESULTS DELIVERY: ☐ FAX ☐ EMAIL ☐ VERBAL ☐ MAIL ONLY		RETURN SAMPLES YES ☐ NO ☐	
REPORTS TO:		PHONE:	
INVOICE TO:		FAX:	
COMMENTS:		EMAIL:	
		PAGER/CELL:	

SAMPLE ID	SAMPLE LOCATION	START TIME	STOP TIME	TOTAL TIME X LITERS /MIN.	TOTAL VOLUME	DATE COLLECTED
7805	WINDOW PUTTY					
7830	Drywall					
7831	Drywall JOINT compound	STOP	FIRST POS	1%		
7832						
7833						
7834	Drywall					
7835	Drywall JOINT compound	STOP	1ST POS.	1%		
7836						
7837						
7822	STULLO					
7823						
7824						
7825						
7826	Drywall JOINT compound					
7827						
7828						
7829	WINDOW PUTTY					

SAMPLED BY: VILTON SCHER		DATE/TIME:		RECEIVED BY:		DATE/TIME:	
RELINQUISHED BY:		DATE/TIME:		RECEIVED BY:		DATE/TIME:	
		3-1-07		DM 3/1/07 1305			
RELINQUISHED BY:		DATE/TIME:		RECEIVED IN LAB BY:		DATE/TIME:	

Asbestos Analysis Chain of Custody

AMERISCI JOB #:

907031027

AMERISCI LOS ANGELES
24416 S Main St. Suite 308
Carson, CA 90745
Phone (310) 834-4868
Fax (310) 834-4772

COMPANY:		ADDRESS:					P.O.#: 30918		
PROJECT INFORMATION		ANALYSIS TYPE	TURNAROUND TIME					AIR FILTER INFORMATION:	
			RUSH	24 HR	48 HR	72 HR	5 DAY		OTHER
JOB NAME: WEBSTER. E.S.		TEM AHERA							MCE
		TEM EPA LEVEL II							PC
JOB NUMBER: 107-0008		TEM DUST MICROVAC							25 mm
		TEM BULK							37 mm
JOB MANAGER: Cesar Ruvalcaba		PCM							0.45 um
		PLM BULK					✓		0.80 um
JOB DESCRIPTION: SMMUSD		PLM 1000 P.C.							TEMP:
		OTHER:							OTHER:
INITIAL RESULTS DELIVERY: ☐ FAX ☐ EMAIL ☐ VERBAL ☐ MAIL ONLY							RETURN SAMPLES Yes ☐ No ☐		
REPORTS TO:							PHONE:		
INVOICE TO:							FAX:		
COMMENTS:							EMAIL:		
							PAGER/CELL:		
SAMPLE ID	SAMPLE LOCATION	START TIME	STOP TIME	TOTAL TIME X	LITERS /MIN.	TOTAL VOLUME	DATE COLLECTED		
7806	STUCCO STOP 1ST POS.			1%					
7807									
7808									
7809									
7810	WINDOW PUTTY								
7811	12" random pinhole ceiling tile glue.								
7812	ROUGH PLASTER STOP 1ST POS.			1%					
7813									
7814									
7815	drywall JOINT compound STOP 1ST POS.			1%					
7816									
7817									
7818	drywall								
7819	drywall JOINT compound STOP 1ST POS.			1%					
7820									
7821									
SAMPLED BY: Victor Sanchez		DATE/TIME:	RECEIVED BY:		DATE/TIME:				
RELINQUISHED BY: [Signature]		DATE/TIME: 3-1-07	RECEIVED BY: [Signature]		DATE/TIME: 3/1/07 1305				
RELINQUISHED BY:		DATE/TIME:	RECEIVED IN LAB BY:		DATE/TIME:				

Asbestos Analysis Chain of Custody

AMERISCI JOB #:

907081027

AMERISCI LOS ANGELES

24416 S Main St. Suite 308

Carson, CA 90745

Phone (310) 834-4868

Fax (310) 834-4772

COMPANY:		ADDRESS:						P.O.#: 30918	
PROJECT INFORMATION		ANALYSIS TYPE	TURNAROUND TIME						AIR FILTER INFORMATION:
			RUSH	24 HR	48 HR	72 HR	5 DAY	OTHER	
JOB NAME: CTL		TEM AHERA							MCE
		TEM EPA LEVEL II							PC
JOB NUMBER: 107-0008		TEM DUST MICROVAC							25 mm
		TEM BULK							37 mm
JOB MANAGER: Cesar Revulcaba		PCM							0.45 um
		PLM BULK							0.80 um
JOB DESCRIPTION: SAMUSD		PLM 1000 P. C.							TEMP:
		OTHER:							OTHER:

INITIAL RESULTS DELIVERY: ☐ FAX ☐ EMAIL ☐ VERBAL ☐ MAIL ONLY		RETURN SAMPLES Yes ☐ No ☐	
REPORTS TO:		PHONE:	
INVOICE TO:		FAX:	
COMMENTS:		EMAIL:	
		PAGER/CELL:	

SAMPLE ID	SAMPLE LOCATION	START TIME	STOP TIME	TOTAL TIME X LITERS / MIN. = TOTAL VOLUME	DATE COLLECTED
7838	STULL	STOP 1ST POS.		1%	
7839					
7840					
7841					
7842					
7843	drywall				
7844	drywall joint compound	STOP 1ST POS.		1%	
7845					
7846					
7847	20064 PLASTER wall	STOP 1ST POS.		1%	
7848					
7849					
7850	SMOOTH PLASTER WALL				
7851					
7852					
7853					
7854	CARPET GLUE				
7855	BROWN FLOOR TILE & MASTIC				
7856	12 X 12 Gray speckled Por tile.				

SAMPLED BY: Victor Sanchez	DATE/TIME:	RECEIVED BY:	DATE/TIME:
RELINQUISHED BY:	DATE/TIME: 3-1-07	RECEIVED BY: ON 1305 3/1/07	DATE/TIME:
RELINQUISHED BY:	DATE/TIME:	RECEIVED IN LAB BY:	DATE/TIME:

Asbestos Analysis Chain of Custody

AMERISCI JOB #:

907031027

AMERISCI LOS ANGELES

24416 S Main St. Suite 308

Carson, CA 90745

Phone (310) 834-4868

Fax (310) 834-4772

COMPANY: <i>CTL</i>		ADDRESS:				P.O.#: <i>30918</i>					
PROJECT INFORMATION		ANALYSIS TYPE		TURNAROUND TIME					AIR FILTER INFORMATION:		
				RUSH	24 HR	48 HR	72 HR	5 DAY			OTHER
JOB NAME: <i>Webster ES.</i>		TEM AHERA								MCE	
		TEM EPA LEVEL II								PC	
JOB NUMBER: <i>107-0008</i>		TEM DUST MICROVAC								25 mm	
		TEM BULK								37 mm	
JOB MANAGER: <i>Cesar Rualaba</i>		PCM								0.45 um	
		PLM BULK								0.80 um	
JOB DESCRIPTION: <i>SMMUSD</i>		PLM 1000 P. C.								TEMP:	
		OTHER:								OTHER:	
INITIAL RESULTS DELIVERY: ☐ FAX ☐ EMAIL ☐ VERBAL ☐ MAIL ONLY						RETURN SAMPLES YES ☐ NO ☐					
REPORTS TO:						PHONE:					
INVOICE TO:						FAX:					
COMMENTS:						EMAIL:					
						PAGER/CELL:					
SAMPLE ID	SAMPLE LOCATION	START TIME	STOP TIME	TOTAL TIME X	LITERS /MIN.	TOTAL VOLUME	DATE COLLECTED				
7857	STUCCO STOP 1ST.	POS.	7	1%							
7858											
7859											
7860											
7861											
7866	ROUGH PLASTER walls										
7867											
7862	SMOOTH PLASTER ceiling										
7863											
7864	SMOOTH PLASTER wall										
7865											
7868	Brown Floor tile & Mastic										
7869	12" peghole ceiling tile & glue.										
7870	drywall.										
7905	STUCCO STOP 1ST POS.			7	1%						
7906											
7907											
7908											
7909											
7910	window PUTTY.										
SAMPLED BY: <i>VICTOR Sanchez</i>		DATE/TIME:		RECEIVED BY:		DATE/TIME:					
RELINQUISHED BY: <i>[Signature]</i>		DATE/TIME: <i>3-1-07</i>		RECEIVED BY: <i>[Signature]</i>		DATE/TIME: <i>3/1/07</i>					
RELINQUISHED BY:		DATE/TIME:		RECEIVED IN LAB BY:		DATE/TIME:					

Asbestos Analysis Chain of Custody

AMERISCI JOB #:

907031027

AMERISCI LOS ANGELES

24416 S Main St. Suite 308

Carson, CA 90745

Phone (310) 834-4868

Fax (310) 834-4772

COMPANY:		ADDRESS:						P.O.#: 30918	
PROJECT INFORMATION		ANALYSIS TYPE	TURNAROUND TIME					AIR FILTER INFORMATION:	
			RUSH	24 HR	48 HR	72 HR	5 DAY		
JOB NAME:		TEM AHERA							MCE
		TEM EPA LEVEL II							PC
JOB NUMBER:		TEM DUST MICROVAC							25 mm
		TEM BULK							37 mm
JOB MANAGER:		PCM							0.45 um
		PLM BULK					✓		0.80 um
JOB DESCRIPTION:		PLM 1000 P. C.							TEMP:
		OTHER:							OTHER:

INITIAL RESULTS DELIVERY: ☐ FAX ☐ EMAIL ☐ VERBAL ☐ MAIL ONLY		RETURN SAMPLES Yes ☐ No ☐	
REPORTS TO:		PHONE:	
INVOICE TO:		FAX:	
COMMENTS:		EMAIL:	
		PAGER/CELL:	

SAMPLE ID	SAMPLE LOCATION	START TIME	STOP TIME	TOTAL TIME X LITERS /MIN. = TOTAL VOLUME	DATE COLLECTED
7911	gray with black dots. Floor & ceiling				
7912	ROUGH PLASTER ceiling				
7913	ROUGH PLASTER walls	STOP 1ST	POS. 2	1%	
7914					
7915					
7916					
7917	SMOOTH PLASTER. ceiling ceiling	STOP 1ST	POS. 2	1%	
7918					
7919					
7920	SMOOTH PLASTER WALL				
7921					
7922					
7923					
7924					
7925					
7926	drywall				
7927	4in light green concrete aggregate				
7928	12x12 pinkish floor tile with dark spots				
7929	1405 brick				
7930	4in. brown concrete aggregate				

SAMPLED BY: Victor Sanchez	DATE/TIME:	RECEIVED BY:	DATE/TIME:
RELINQUISHED BY: <i>[Signature]</i>	DATE/TIME: 3-1-07	RECEIVED BY: <i>[Signature]</i>	DATE/TIME: 3/1/07
RELINQUISHED BY:	DATE/TIME:	RECEIVED IN LAB BY:	DATE/TIME:

Asbestos Analysis Chain of Custody

AMERISCI JOB #:

907031027

AMERISCI LOS ANGELES

24416 S Main St. Suite 308

Carson, CA 90745

Phone (310) 834-4868

Fax (310) 834-4772

COMPANY: <i>CTL</i>		ADDRESS:					P.O.#: <i>30918</i>		
PROJECT INFORMATION		ANALYSIS TYPE	TURNAROUND TIME					AIR FILTER INFORMATION:	
			RUSH	24 HR	48 HR	72 HR	5 DAY		OTHER
JOB NAME: <i>Webster E.S.</i>		TEM AHERA							MCE
		TEM EPA LEVEL II							PC
JOB NUMBER: <i>107-0008</i>		TEM DUST MICROVAC							25 mm
		TEM BULK							37 mm
JOB MANAGER: <i>Desaun Rabelaba</i>		PCM							0.45 um
		PLM BULK							0.80 um
JOB DESCRIPTION: <i>BMMUSD</i>		PLM 1000 P. C.							TEMP:
		OTHER:							OTHER:

INITIAL RESULTS DELIVERY: ☐ FAX ☐ EMAIL ☐ VERBAL ☐ MAIL ONLY

RETURN SAMPLES YES ☐ NO ☐

REPORTS TO:

PHONE:

INVOICE TO:

FAX:

COMMENTS:

EMAIL:

PAGER/CELL:

SAMPLE ID	SAMPLE LOCATION	START TIME	STOP TIME	TOTAL TIME X LITERS /MIN. = TOTAL VOLUME	DATE COLLECTED
7877	drywall				
7878	drywall joint compound				
7879					
7880					
7881	smooth PLASTER				
7882					
7883					
7884					
7885					
7886					
7887					
7888	brown floor tile & mortar				
7871	STUCCO				
7872					
7873					
7874	ROUGH PLASTER ceiling				
7875					
7876	window putty				

SAMPLED BY: <i>Victor Sander</i>	DATE/TIME:	RECEIVED BY: <i>[Signature]</i>	DATE/TIME:
RELINQUISHED BY: <i>[Signature]</i>	DATE/TIME: <i>3-1-07</i>	RECEIVED BY: <i>[Signature]</i>	DATE/TIME: <i>3-1-07</i>
RELINQUISHED BY:	DATE/TIME:	RECEIVED IN LAB BY:	DATE/TIME:

FIELD BULK SAMPLE LIST

CLIENT: SHMUSD

PROJECT NO.: 107-0008

PROJECT NAME: weeps for E.S.

Technician: N. Sauer

Date: 2-28-07

Page: 2 of 3

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	12x12 light green flur tiles & glue	7999	Bldg A	RMS 1-4	1000 sq. ft	N	N
	4 in dark green concrete & glue	7800		RMS 1-4 carpeted area	280 sq. ft	N	N
	4 in gray concrete & glue	7802		RMS 1-4 tiled area	120 sq. ft	N	N
	INAC DUCT TAPS	7804		RMS 1-4 htr closets	4 ea	N	N
	carpet glue	7854	Bldg E				
	htr unit	7798	Bldg A				
	Gravel roof core			htr RMS in RMS 1-4	4 ea	N	N
	roof mastil			roof	5200 sq. ft	N	N
	chalk board (dry erase)			roof penetration	40 sq. ft	N	N
				RMS 1-4	8 ea	N	N

[Handwritten signature]

Simple Reinspection Form 1. Original AHERA Inspection Information Abstracted from the Management Plan

school Webster B.S. Building A Date(s) of Original AHERA Inspection _____

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
W2901	12" brown floor tile with pebble stripe white mesh	TSI Surf. Misc.	Assumed Yes ☒ No ☐	F NF X		Observed in rm 20 under carpet. Observed in rm 19 through wall 1600 sq ft	RM 19 tile is in & extreme poor condition and also buckling
W2401	Exterior walls	TSI Surf. Misc.	Assumed Yes ☐ No ☐	F NF X			
W2501 Term W2505	Exterior Stucco Ceiling	TSI Surf. Misc.	Assumed Yes ☐ No ☒	F NF X		Overhang ceiling on garage site	
W2602 W2604	Canvas wrap duct insulation	TSI Surf. Misc.	Assumed Yes ☐ No ☒	F NF X		HVAC room	
W2704	Canvas wrap duct insulation	TSI Surf. Misc.	Assumed Yes ☐ No ☒	F NF X			
W3101	Floor canisters	TSI Surf. Misc.	Assumed Yes ☐ No ☐	F NF X			

Inspector: _____ Date _____
Information abstracted by: _____

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)
AHERA assessment category: 1 = Damaged or significantly damaged friable miscellaneous ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided

In original inspection:
Note to 1-specifier: Floor tile abatement in rooms 17, 18, 19, 20
Water pipe abatement 17, 18, 19, 20
Water room 17, 18, 19, 20 - not abated - not checked for asbestos. Check for fire doors joint type - floor coverings - as built

School Webster E.S.Building A

Date(s) of Original AHERA Inspection _____

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
7785	2x4x6	TSI Surf. Misc.	Assumed Yes No	F NF X		EXT. walls	n/e
7786						3000 sq. ft	n/w
7787							s/w
7788		TSI Surf. Misc.	Assumed Yes No	F NF X		I	sg
7789	Plaster	TSI Surf. Misc.	Assumed Yes No	F NF X		RMS 17-20 AND 17th ceiling	RM 17 S/E
7790						3500 sq. ft	RM 18 n/e
7791							RM 20 n/e
7792		TSI Surf. Misc.	Assumed Yes No	F NF X		I	HTRC 1 S/W
7793							HTRC 2 S/W
7794	Drywall	TSI Surf. Misc.	Assumed Yes No	F NF X		RM 17 18 & RM 20 dividing walls 800 sq. ft	RM 20 n/w
7795	Drywall J. comp.	TSI Surf. Misc.	Assumed Yes No	F NF X		I	RM 20 n/w
7796							RM 17 S/E
7797							Reckling S/E

Information abstracted by V. SanderDate 2-27-07

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)

AHERA assessment category: 1 = Damaged or significantly damaged TSI ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

School

Webster. ES

Building

A

Date(s) of Original AHERA Inspection

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
7798	carpet glue	TSI Surf. Misc.	Assumed Yes No	F NF X		RMS 17-20 2800 sq. ft.	Rm 20 ctr.
7799	12x12 light green speckled per tile glue	TSI Surf. Misc.	Assumed Yes No	F NF X		RMS 17, 18, 20 under carpet Rm 20 2200 sq. ft.	Rm 17 n/w.
7800	4 in Dark green concrete glue	TSI Surf. Misc.	Assumed Yes No	F NF X		Rm 17 20 Li. FT. Rm 20 Rm 19	Rm 17 No. ctr
7801	4 in brown concrete glue	TSI Surf. Misc.	Assumed Yes No	F NF X		Rm 18 75 Li. FT.	Rm 18 s/w.
7802	4 in gray concrete glue	TSI Surf. Misc.	Assumed Yes No	F NF X		Rm 20 30 Li. FT. (no core end)	Rm 20 s/w
7803	2x4 Fissured ceiling panel	TSI Surf. Misc.	Assumed Yes No	F NF X		RMS 17-20 3200 sq. ft.	Rm 19 ctr

Information abstracted by Victor Sanchez

Date

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)

AHERA assessment category: 1 = Damaged or significantly damaged TSI ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

School Webster E.S.Building 17

Date(s) of Original AHERA Inspection _____

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
7804	HVAC DUCT Tape (gray)	TSI Surf. Misc.	Assumed Yes No	F NF X		HTR closet 1, 2, 3, 4 20 sq. ft.	HTR closet HS CRN
Assumed	Gravel roof core.	TSI Surf. Misc.	Assumed Yes No	F NF X		4,200 sq. ft. roof	
Assumed	ROOF Mastic	TSI Surf. Misc.	Assumed Yes No	F NF X		roof material 25 sq. ft.	
Assumed	chuck boards	TSI Surf. Misc.	Assumed Yes No	F NF X		rows 17-20 12 each	chuck boards are not the originals they are dry/erase
Assumed	HTR units	TSI Surf. Misc.	Assumed Yes No	F NF X		HTR closets 4 ea	
7805	window putty.	TSI Surf. Misc.	Assumed Yes No	F NF X		Exterior windows 2500 L.F.T.	n/w.

Information abstracted by _____

Date _____

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)

AHERA assessment category: 1 = Damaged or significantly damaged TSI ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

Flexible collars in HTR closets consist of canvas material

CTL ENVIRONMENTAL SERVICES FIELD BULK SAMPLE LIST

CLIENT: Sumus D Technician: V. Sachz
 PROJECT NO.: 107-0008 Date: 2-28-07
 PROJECT NAME: Webster ES Bldg B Page: 1 of

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	stucco	7822	S/E	exterior walls	2200 sq. ft.	N	N
		7823	N/E				
		7824	N/W				
		7825	S/W				
	w 2402	w 2402					
	Gypsum w/ J.C. 1002 w 1004	w 1004	Gypsum w/ J.C. ↓	CLASSROOMS & WORK Rms. (dividing walls)	1600 sq. ft.	N	N
	w 1104	w 1104	Gypsum/drywall	TOILETS & STORAGE Rms. in CLASSROOMS.	1600 sq. ft.	N	N
	drywall J.C.	7826	Rm 11 storage rm S/W				
		7827	Rm 12 storage rm S/E				
		7828	Rm 11 Toilet N/W				
	windows Putty	7829	N/E	ext. walls	1200 sq. ft.	N	

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: SHMUSD Technician: N. Sandoz
 PROJECT NO.: 107-0008 Date: 2-28-07
 PROJECT NAME: Webster E.S. Bldg B Page: 2 of 2

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	drywall	7830	storage rm N/E	storage rm	750 sq. ft.	N	N
	drywall J.C.	7831	N/E	storage rm			
		7832	N/W				
		7833	S/W				
	9" gray brick w/ yellow streaks	7834	POS.	work rm 2 & 1	80 sq. ft.	N	N
	drywall	7835	HTRM 2 S/W	HTR ROOMS	600 sq. ft.	N	N
		7836	HTRM 2 S/E				
		7837	S/W				

Technician: N. Sauer
Date: 2-28-07
Page: 3 of

6/1/5 B

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	12x12 Light green particle glue	7999	Bldg A	Rm 11, 12	1800 sq. ft.	N	N
	4m dark green concrete glue	7800			180 sq. ft.	N	N
	car pet glue	7854 7798			1800 sq. ft.	N	N
	2x4 insured ceiling panel HTR UNIT.	7803		HTR CLOSETS	2300 sq. ft.	N	N
	Gravel roof core.	Assumed		Roof	2 ea	N	N
	Roof mastic	Assumed		Roof penetrations	2600 sq. ft.	N	N
	chick boards,	Assumed	not original (dry/cruse new)	Dues 11 & 2	30 sq. ft.	N	N
					4 ea		

Sample Reinspection Form 1. Original AHERA Inspection Information Abstracted from the Management Plan

School Webster E.S Building 13 Date(s) of Original AHERA Inspection

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
W0601	12" brown floor tile w/ white walls & shower	TSI Surf. <u>Misc</u>	Assumed <u>Yes</u> No	F NF X		Independent classroom removed.	
W0701	9" grey floor tile w/ yellow & white walls & shower	TSI Surf. <u>Misc</u>	Assumed <u>Yes</u> No	F NF X		Work room 1 & 2 still on site	
W1002 W1004	Gypsum walls w/ joint compound	TSI Surf. <u>Misc</u>	Assumed <u>Yes</u> No	F NF X			
W1104	Gypsum ceiling	TSI Surf. <u>Misc</u>	Assumed <u>Yes</u> No	F NF X			
W1202	12" random pattern ceiling tile	TSI Surf. <u>Misc</u>	Assumed <u>Yes</u> No	F NF X		Most of it removed. Left a row on south side to hold. else conduit.	
W2402	Exterior Sheetrock walls	TSI Surf. <u>Misc</u>	Assumed <u>Yes</u> No	F NF X			

Date

Inspected by
Information abstracted by

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)
 AHERA assessment category: 1 = Damaged or significantly damaged friable miscellaneous ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for significant damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

Sample Reinspection Form 1. Original AHERA Inspection Information Abstracted from the Management Plan

School Wobster C.S. Building B Date(s) of Original AHERA Inspection

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
W2501 W2502 W2503 W2504 W2505	Basement space ceiling	TSI (Surf.) Misc.	Assumed Yes (No)	F NF X		Over Long ceiling - on fire S.H.E.	
W2503 W2504	HVAC exhaust vent pipe joint type	TSI (Surf.) Misc.	Assumed Yes (Yes) No	F NF X		Boiler room, not observed	
		TSI Surf. Misc.	Assumed Yes No	F NF X			
		TSI Surf. Misc.	Assumed Yes No	F NF X			
		TSI Surf. Misc.	Assumed Yes No	F NF X			
		TSI Surf. Misc.	Assumed Yes No	F NF X			
		TSI Surf. Misc.	Assumed Yes No	F NF X			

Date

Inspected by
Information abstracted by

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)

AHERA assessment category: 1 = Damaged or significantly damaged friable surfacing ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for significant damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

School Webster ES Building C.Date(s) of Original AHERA Inspection

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
7806	stucco	TSI Surf. Misc.	Assumed Yes No	F NF X		Ext. walls	s/w
7807							s/e
7808						3900 sq. ft.	n/g
7809							n/w.
W2403							
7810	window putty	TSI Surf. Misc.	Assumed Yes No	F NF X		Ext. windows 2600 L1. FT.	s/w.
7811	12" peg random pin hole c. t. glue	TSI Surf. Misc.	Assumed Yes No	F NF X		ESL. Rm 600 sq. ft.	ESL. CR12
7812	Rough plaster	TSI Surf. Misc.	Assumed Yes No	F NF X		Boys, girls, custodian rm	custodian rm n/w
7813						elec. rm	Boys n/w.
7814						950 sq. ft.	girls n.o. crn.
7804	gum Huac duct tape	TSI Surf. Misc.	Assumed Yes No	F NF X		1712 closets	
2624						4 ea.	

Information abstracted by Date

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)

AHERA assessment category: 1 = Damaged or significantly damaged TSI ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

School Webster E.S.Building CDate(s) of Original AHERA Inspection 2.27.07

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
7815	Drywall joint	TSI	Assumed	F	See summary	Room 13-16 dividing walls, rm 16A walls	RM 13 S/W.
7816		Surf.	Yes	NF	W1001	Recessings	RM 15 S/E
7817		Misc.	No	X	W1003	elec. rm & rest rm	RM 16 N/W.
7818	Drywall	TSI	Assumed	F	W1101	Room 13-16 dividing walls, rm 16A walls	HTR closet 1
7819	Drywall (S.C.)	TSI	Assumed	F		1-4	Att: S/W
7820		Surf.	Yes	NF		700 sq. ft.	HTR closet 1 S/W
7821		Misc.	No	X			HTR closet 2 S/E
7799	12x12 light green tile & blue	TSI	Assumed	F			HTR closet 4 S/W
7800	4 in dark green core base & glue	TSI	Assumed	F		13, 14, 15, 16	
7802	4 in gray concrete & glue	TSI	Assumed	F		800 sq. ft.	
7803	2x4x8 plaster	TSI	Assumed	F		Rms 13, 14, 15, 16	
7804	2x4x8 plaster	TSI	Assumed	F		240' L	
7805	2x4x8 plaster	TSI	Assumed	F		Esc rm (16A)	
7806	2x4x8 plaster	TSI	Assumed	F		70' L	
7807	2x4x8 plaster	TSI	Assumed	F		Rms 13-16	
7808	2x4x8 plaster	TSI	Assumed	F		3800 sq. ft.	

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)

AHERA assessment category: 1 = Damaged or significantly damaged TSI ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

Flexible collars in HTR closets consist of vinyl material (4 ea)

Simple Reinspection Form 1. Original AHERA Inspection Information Abstracted from the Management Plan

school Wobster E.S. Building C Date(s) of Original AHERA inspection _____

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
W0801	12" grey floor tile w/ brown speckles, misc	TSI Surf. (Misc)	Assumed Yes (No)	F NF X		E.S.L. Classroom observed under carpet. 600 sq. ft.	Also observed under carpet in room 15 800 sq. ft.
W1001	Gypsum wall joint compound	TSI Surf. (Misc)	Assumed Yes (No)	F NF X			
W1103	Take one sample	TSI Surf. (Misc)	Assumed Yes (No)	F NF X			
W1105	Gypsum ceiling	TSI Surf. (Misc)	Assumed Yes (No)	F NF X			
W1201	check for asbestos 12" random polyfoam ceiling tile (New)	TSI Surf. (Misc)	Assumed Yes (No)	F NF X		Replacement in E.S.L. Classroom 20 sq. ft.	
W1301	check for asbestos 12" random polyfoam ceiling tile	TSI Surf. (Misc)	Assumed Yes (No)	F NF X		E.S.L. Classroom 560 sq. ft.	
W1302	check for asbestos Mastic associated w/ polyfoam ceiling tile	TSI Surf. (Misc)	Assumed Yes (No)	F NF X		E.S.L. Classroom 560 sq. ft.	
W1303	check for asbestos Mastic associated w/ polyfoam ceiling tile	TSI Surf. (Misc)	Assumed Yes (No)	F NF X		E.S.L. Classroom 560 sq. ft.	

Inspector _____ Date _____
Information abstracted by _____

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)
 AHERA assessment category: 1 = Damaged or significantly damaged friable miscellaneous ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable significantly damaged friable miscellaneous ACBM or nonfriable surfacing or miscellaneous material, None = No assessment category provided
 In original inspection.

Sample Reinspection Form 1. Original AHERA Inspection Information Abstracted from the Management Plan

Building C Date(s) of Original AHERA Inspection _____

School Webster E.S. Building C Date _____

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
W2403	exterior stucco wall	TSI Surf. Misc.	Assumed Yes No	F NF X			
W2501 from W2505	exterior stucco ceiling <i>Sample add. accordingly</i>	TSI Surf. Misc.	Assumed Yes No	F NF X		overhang ceiling for test s. to 3 SDD SL	
assumed	ceiling boards	TSI Surf. Misc.	Assumed Yes No	F NF X		rooms 13, 14, 15, 16 & 16A (ESC) (9 ea)	was original chert boards (sty/erasc boards)
assumed	HTR units	TSI Surf. Misc.	Assumed Yes No	F NF X		rooms 13, 14, 15 16, & 16A ESC w 5 ea.	
assumed	gravel roof core	TSI Surf. Misc.	Assumed Yes No	F NF X		roof w 750.55 ft	
assumed	roof plastic	TSI Surf. Misc.	Assumed Yes No	F NF X		roof penetrations 5059 ft w 750.55 ft	

Inspected by: _____ Date: _____
 Information abstracted by: _____
 Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)
 AHERA assessment category: 1 = Damaged or significantly damaged TSI ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

CTL ENVIRONMENTAL SERVICES FIELD BULK SAMPLE LIST

CLIENT: SMKUSD (Admin) Technician: V. Sanchez
 PROJECT NO.: 107-0008 Date: 2-28-07
 PROJECT NAME: Webster E-7 Page: 1 of 2
Bldg D

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	STUCCO	7889	N/E	ext. wall	2950 sq. ft	N	N
		7890	No. CTR.				
		7891	N/W				
		7892	S/W				
		7893	S/E				
	rough plaster ceiling	7894	rough HTR closet S/E	HTR closet & elec. rm	700 sq. ft	N	N
		7895	elec rm S/E				
		7896	elec rm N/E				
	9" dark tan w/ brown putty like filler	w0401 w0501	POS.	elec rm 4	40 sq. ft	N	N
	Smooth plaster	w2302 w2304 w2201 w2204	rough				
	4" brown couching & glue	7897	elec rm NE	elec. rm 20 L Ft	20 L Ft	N	N

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: SHMUSD Technician: V. Sanchez
 PROJECT NO.: 1070008 Date: 2-28-07
 PROJECT NAME: Webster ES Page: 2 of 2

(ndm)
 Bldg D

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	Window putty	7898	DOOR CASE	Ext windows	200 LI. FT	N	Y.
	Dryway	7899	nurses office NW	All dividing walls except elec. rm & HTR unit	3800 sq. ft	N	N
	Drywall Joint comp	7900					
		7901	main office SW				
		7902	Hall N/E				
		7903	work rm S/E				
		7904	work rm R/S entrance				
	4 in gips core base coat	7802	Bldg A	nurses office, radio testing rm, work rm, principal office, main office & Hall	280 LI. FT	N	N
	HYDRA PORE TAPE	7804	Bldg A.	HTR RM	5 sq. ft	N	N
	2.24 Fibrated cement panel	7803	Bldg A	nurses office, radio testing rm, work rm, main office, principal office, Hall	1800 sq. ft	Y	N
	HTR unit	7805		HTR RM	1 ea	N	N
	Gravel roof cone	7806		roof	1800 sq. ft	N	N
	Roof membrane	7807		roof penetration	25 sq. ft	N	N

CTL ENVIRONMENTAL SERVICES

CLIENT: SMU3D

PROJECT NO.: 107 0008

PROJECT NAME: Webster E.S.

Admin Technician: V. Sanchez

Date: 2-28-07

Page: 3 of 3[illegible]

Sample Reinspection Form 1. Original AHERA Inspection Information Abstracted from the Management Plan

school Webster N.S. Building D Date(s) of Original AHERA Inspection _____

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
W1502 W1603	12" straight dogholes ceiling tiles in MC57c	TSI Surf. Misc.	Assumed Yes <u>No</u>	F NF X		Removed.	
W1701 W1702 W1703	12" random dogholes ceiling tiles (old) check for asbestos	TSI Surf. Misc.	Assumed Yes <u>No</u>	F NF X		Copier room non-observed through bldg.	
W2005	Rough plaster ceiling sample accordingly	TSI Surf. Misc.	Assumed Yes No	F NF X		Boiler room Removed replaced with drywall	
W2201 W2204	Smooth plaster ceiling sample accordingly	TSI Surf. Misc.	Assumed Yes No	F NF X		Boiler room Removed replaced with drywall.	
W2202 W2501 W2505	Smooth plaster exterior siding overhang	TSI Surf. Misc.	Assumed Yes <u>No</u>	F NF X		All exterior overhangs	
		TSI Surf. Misc.	Assumed Yes No	F NF X			

Inspector: _____
Information abstracted by: _____

Date _____

Information abstracted by: _____
Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)
AHERA assessment category: 1 = Damaged or significantly damaged TSI ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for significant damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

Simple Reinspection Form 1: Original AHERA Inspection Information Abstracted from the Management Plan

Sample Reinspection Form 1: Original AHERA Inspection Information Abstracted from the Management Plan

Date(s) of Original AHERA Inspection

D

Building

Webster B.S.

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
W0401	9" dk. tan w/ brown streaks floor tile a N=5% C	TSI Surf. (Misc.)	Assumed (Yes) No	F NF X		Teacher work room, Removal	
W0501	9" tan w/ brown streaks floor tile w/ 5% C	TSI Surf. (Misc.)	Assumed (Yes) No	F NF X		Copier room, Removal	
W1102	gypsum ceiling check for J.T. and sample for asbestos	TSI Surf. (Misc.)	Assumed Yes No	F NF X		Copier room removed	
W2005	rough plaster ceiling sample accordingly	TSI Surf. (Misc.)	Assumed Yes No	F NF X		removed	
W2204	smooth plaster ceiling sample accordingly	TSI Surf. (Misc.)	Assumed Yes No	F NF X			
W2302	smooth plaster walls sample accordingly	TSI Surf. (Misc.)	Assumed Yes No	F NF X		13c to room	

Date

145 pec for
Information abstracted by

Fraility: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)

AHERA assessment category: 1 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable significantly damaged friable miscellaneous material, None = No assessment category provided ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided

In original inspection.

Simple Reinspection Form 1. Original AHERA Inspection Information Abstracted from the Management Plan

School: Webster E.S. Building: D Date(s) of Original AHERA Inspection: _____

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
W2304	smoote plaster walls <i>✓ Sample secondarily</i>	TSI <u>Surf.</u> Misc.	Assumed Yes No	F NF X		removed	
W2901 W2903	HVAC duct insulation <i>Sample main if necessary</i>	TSI Surf. <u>Misc.</u>	Assumed Yes <u>No</u>	F NF X		closet, nurse's office check removed.	
W28201	HVAC exhaust vent pipe joint tape	<u>(TSI)</u> Surf. Misc.	Assumed <u>Yes</u> No	F NF X		HVAC room, check removed	
		TSI Surf. Misc.	Assumed Yes No	F NF X			
		TSI Surf. Misc.	Assumed Yes No	F NF X			
		TSI Surf. Misc.	Assumed Yes No	F NF X			

Info Rec for: _____ Date: _____
Information abstracted by: _____

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)
 AHERA assessment category: 1 = Damaged or significantly damaged TSI ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

FIELD BULK SAMPLE LIST

CLIENT: SHMUS D Technician: N. Sanchez
 PROJECT NO.: 107-0008 Date: 2-28-01
 PROJECT NAME: Webster ES Page: 1 of 3

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	stucco	7838	p/w	ext. walls	1950	N	N
		7839	N/E		sg. fm	N	
		7840	entrance to comp. rm.				
		7841	S/E				
		7842	S/W				
	gypsum wall joint comp.	7843	comp.	office 2 east wall comp. rm. walls	480	N	N
	drywall	7844	office 2. east ctr.		sg. fm		
	drywall J.C.	7845	comp. rm. S/E				
		7846	comp. rm. so. ctr.				
	woodwork	pos. w3001		ext. windows	800	N	N

CTL ENVIRONMENTAL SERVICES FIELD BULK SAMPLE LIST

CLIENT: SMHUSD Technician: N. Sanchez
 PROJECT NO.: 107-0008 Date: 2-28-03
 PROJECT NAME: webster ES Page: 2 of 3
Bldg E

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	Rough Plaster w/ walls	72104	Library w/w	Library & rm. East & west walls only (north & south walls are concrete)	2950	N	N
		72105			39.71	N	
		7847	Library w/w				
		7848	Rm 7 West. CTR				
		7849	Rm 7 S/E				
	Smooth Plaster wall	W2301	Office 1	Office 1, 2 & HTR closet	2400	N	N
		7850	Office 1 w/w		39.71	N	
		7851	Office 2 w/w				
		7852	Office 2 S/E				
		7853	HTR closet S/w.				
	12" random peg hole wall	W2355		HTR closet	100	N	N
	Grout glue			note: this tile is same as ceiling tile	39.71	N	

CTL ENVIRONMENTAL SERVICES FIELD BULK SAMPLE LIST

CLIENT: SUN (VSD) Technician: Vr-Saunder
 PROJECT NO.: 107-0008 Date: 2-28-07
 PROJECT NAME: Waste for ESD Page: 3 of 3
Bldg E

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	carpet glue	7854	rm 7 ctn.	rm 7.	200 39.75	N	N
	Brown floor tile & mass tile	7855	rm 7 ctn	rm 7 under carpet.	200 39.75	N	N
	12'x12 grey recycled floor tile	7856	office 2 2/w.	office 1 & 2	200 39.75	N	N
	12'x12 light green recycled floor tile	7859	bldg A	rm 7	250 39.75	N	N
	4 in dark green concrete tile	7800	bldg A	Library, office 1, 2, computer rm	400 21.75	N	N
	4 in grey concrete tile	7802	bldg A	rm 7	80 20.40	N	N
	Hvac duct tape	7804	bldg A	HTR closet	250.75	N	N
	2x4 assured ceiling panel	7803	bldg A	library rm 7	3000 39.75	N	N
	14" x 14" vinyl	Assured		HTR closet	1 ea	N	N
	concrete roof core	Assured		roof	3400 39.75	N	N
	roof insulation	Assured		roof insulation	20 39.75	N	N
	chase board.	Assured	(new kind dry erase)	rm 7	2 ea	N	N

Sample Reinspection Form 1. Original AHERA Inspection Information Abstracted from the Management Plan

School Webster ES. Building E Date(s) of Original AHERA Inspection

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
W1065 ✓	Gypsum wall / Joint compound Sample accordingly	TSI Surf. Misc.	Assumed Yes No	F NF X			
W1203	12" random patch on ceiling tile Check for residue	TSI Surf. Misc.	Assumed Yes No	F NF X		Library office 1 & 2 & computer room and HTR crst. (uncovered is needed on)	Library room & RMT Whose ceiling removed.
W2104 ✓ W2105	Rough plaster Bells Sample accordingly	TSI Surf. Misc.	Assumed Yes No	F NF X			
W2301 ✓	Smooth plaster wall Sample accordingly	TSI Surf. Misc.	Assumed Yes No	F NF X			
W2501 ✓ W2505	Entire stucco ceiling	TSI Surf. Misc.	Assumed Yes No	F NF X		Overhang ceilings entire site	
W3001 ✓ W3001	Window pntly	TSI Surf. Misc.	Assumed Yes No	F NF X			

Inspected by
 Information abstracted by

Date

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)

AHERA assessment category: 1 = Damaged or significantly damaged friable miscellaneous ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: SMUSD
 PROJECT NO.: 107-0002
 PROJECT NAME: Webster E.S.

Bldg F

Technician: N. Sanchez
 Date: 2-28-07
 Page: 1 of 3

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	stucco	7857	N/E	exterior walls	2200 59.75	N	N
		7858	S/E				
		7859	N/W				
		7860	S/W				
		7861	west ctr.				
	Rough Plaster walls	w2102 w2106	(ceiling samples)	classrooms, Teachers closet & mechanical rm.	2500 59.75	N	N
		w2107				N	N
		7866	rm 9 N/W			N	N
		7867	mech rm. N.C. CTN			N	N
	Window Rusty	POS. w3003		ext. windows			
	Smooth Plaster ceiling	w2203 w2204		Boys RR's & Girls RR's ceilings	500 59.75	N	N
		7862	Boys N/W				
		7863	girls N/W				

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: SHMUSD Technician: N. Sanchez
 PROJECT NO.: 107-0008 Date: 2-28-07
 PROJECT NAME: Webster E-S Page: 2 of 3
Bldg F

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	Smooth plaster wall	7830B		Boys & Girl Rm's walls	750 39.71	N	N
		7864	Girls NO. CTN				
		7865	Boys. S/E				
	Brown floor tile & mastic	7868	Rm 10 CTN	Room 9 & 10 under carpet	1600 59.75		
	12" brown & grey tile & glue	7869	Rm 9 SO. CTN.	Rm 8, 9, 10 north & south perimeter and residual ceiling tile	700 37.71	X	X
	drywall	7870	Rm 9 CTN.	Rm 8, 9, 10, 11 north & south perimeter ceiling and residual drywall	700 39.75	N	N
	NOTE: ceiling tiles & drywall were removed previously separated remaining materials located above. ceiling panels (2x4 removed)						
	12x12 Light green Particleboard	7899	Bldg A	Rms 8, 9, 10	750 37.70	N	N
	4in. dark green core board glue	7800	Bldg A	Rms 8, 9, 10 carpet area.	240 21.50	N	N
	4in gray concrete glue	7802	Bldg A	Rm 8, 9, 10 Tiled area	240 20.45	N	N
	HVAC duct tape	784	Bldg A	under rm	5 59.75	N	N

Technician: N. Savellov
Date: 2-28-07
Page: 3 of 3

Technician: N. Savellov
Date: 2-28-07
Page: 3 of 3

Date: 2-28-07

Page: 3 of 3

Bldg F

PROJECT NO.: 1007-008

PROJECT NAME: webster E.S.

[illegible]

Sample Reinspection Form 1. Original AHERA Inspection Information Abstracted from the Management Plan

School: Webster SS Building: F Date(s) of Original AHERA Inspection: _____

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
W2102	Rough plaster walls	TSI Surf. Misc.	Assumed Yes No	F NF X		Boiler room Jan room & corridors.	
W2106	Sample wall in hallway	TSI Surf. Misc.	Assumed Yes No	F NF X		Boys AR	
W2203	Smooth plaster ceiling	TSI Surf. Misc.	Assumed Yes No	F NF X		Boys AR	
W2303	Smooth plaster wall	TSI Surf. Misc.	Assumed Yes No	F NF X			
W3003	Window putty	TSI Surf. Misc.	Assumed Yes No	F NF X			
		TSI Surf. Misc.	Assumed Yes No	F NF X			
		TSI Surf. Misc.	Assumed Yes No	F NF X			

Inspector: _____ Date: _____

Information abstracted by: _____

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)

AHERA assessment category: 1 = Damaged or significantly damaged TSI ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for significant damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

In original inspection.

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: SUMUSD

PROJECT NO.: 1070008

PROJECT NAME: Webster E.S.

Auditorium

Technician: N. Sanchez

Date: 2-28-07

Page: 2 of 4

Bldg 6

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	Rough Plaster ceiling	W2001		Auditorium, kitchen, storage room, teachers work rm, kitchen.			
		W2002					
		W2003					
		W2004					
		7912	kitchen w/w.				
	Rough plaster walls	W2103		storage rm, kitchen rm	1800 79.75	N	N
		7913	kitchen w.o.c.n.				
		7914	kitchen s/e				
		7915	storage rm w/w				
		7916	storage rm s/e				
	Sandwich plaster ceiling	W2202		teachers dining rm, & R.R.'s	1500 79.75	N	N
		W2205					
		7917	teachers dining rm w/e				
		7918	teachers dining rm s/w.				
		7919	Boys rm's w/w.				

CTL ENVIRONMENTAL SERVICES FIELD BULK SAMPLE LIST

CLIENT: S. MMUSD
 PROJECT NO.: 1070008
 PROJECT NAME: webster es

Technician: V-Sanchez
 Date: 2-23-07
 Page: 2 of 4

(Add.)
 Bldg C

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	stucco	7905	N/E	ext. walls	500 2200	N	N
		7906	N/W				
		7907	SO. CTN				
		7908	S/E				
		7909	S/W				
	windown putty	7910	S/W	ext. window. on west & south sides	300 4.175	N	N
	gray with black dots floor shading	7911	kitchen so. ctn	kitchen	1200 39.77	N	N
	off white ply tile ceramic	0301	PDS.	auditorium	2500 39.77	N	N
	gr dark tan. Per like paint	W201	—PDS.	terraces run	80 59.75	N	Yes

FIELD BULK SAMPLE LIST

CLIENT: SMUSD And. Technician: V. Sankar
 PROJECT NO.: 107-0006 Date: 2-28-02
 PROJECT NAME: Webster E-S Page: 3 of 4

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	small Plaster walls	7920	teacher dining rm 3/w.	teacher's dining rm kitchen teacher's working, auditorium, R215	8500 59.79	N	N
		7921	kitchen. 30.07m	kitchen. stage area			
		7922	boys R215 S/E				
		7923	stage area n/w				
		7924	auditorium, entrance				
		7925	kitchen n/w				
		72305					
	dry wood	7926	storage area entr.	storage area (no food wrapped)	60 59.75	N	N
	4 in. light green concrete & glass	7927	dining rm N/E	dining rm	80 21.5	N	N
	12x12 Pinkish with dark spots (for tiles)	7928	dining rm east entrance	dining rm, 70	700 59.77	N	N
	hot bricks	7929	kitchen n/w	kitchen kitchen	30 59.77	N	N

CTL ENVIRONMENTAL SERVICES

CLIENT: SUMUSD

PROJECT NO.: 107-0068

PROJECT NAME: webster

Technician: V-Sawker

Date: 2-28-07

Page: 4 of 4

9 Apr 8

[illegible]

Simple Reinspection Form 1. Original AHERA Inspection Information Abstracted from the Management Plan

school Webster D.S. Building 5 Date(s) of Original AHERA Inspection 3/27/84

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
W0101	9" tan floor tile - Mastic	TSI Surf. Misc.	Assumed <u>Yes</u> No	F NF X		Kitchen - 300' sq ft	
W0201	Mastic - Negative 9" dark tan floor tile - Mastic	TSI Surf. Misc.	Assumed <u>Yes</u> No	F NF X		Storage Jan closet 80.33 sq ft	
W0301	12" off white floor tile Mastic = NP	TSI Surf. Misc.	Assumed <u>Yes</u> No	F NF X		Auditorium	
W1501	12" straight porcelain ceiling tile - Mastic	TSI Surf. Misc.	Assumed <u>Yes</u> No	F NF X		Kitchen 3/4 storage area in linen.	
W1602	12" fissured ceiling tile - Mastic	TSI Surf. Misc.	Assumed <u>Yes</u> No	F NF X		Auditorium	
W1801 W1802 W1803 W1804 W1805	12" Mastic associated 12" fissured ceiling tile	TSI Surf. Misc.	Assumed <u>Yes</u> No	F NF X		Auditorium	
W1901 W1902 W1903	12" Mastic associated 12" fissured ceiling tile	TSI Surf. Misc.	Assumed <u>Yes</u> No	F NF X		Auditorium	

Date

Inspector for:
Information abstracted by:

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)
 AHERA assessment category: 1 = Damaged or significantly damaged friable miscellaneous ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for significant damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

Abstract—Abstracted from the Management Plan

Sample Reinspection Form 1. Original AHERA Inspection Information

Building	11/15/21
11/15/21	

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
W2001 W2002 W2003 W2004	Rough plaster ceiling Plaster	TSI (Surf) Misc.	Assumed Yes No	F NF X	1	Antenna: kitchen storage room teaching area	in room needs
W2403	Rough plaster walls Plaster	TSI (Surf) Misc.	Assumed Yes No	F NF X	4	storage room kitchen.	
W2202 W2205	Smooth plaster ceiling Plaster	TSI (Surf) Misc.	Assumed Yes No	F NF X	3	teachers dining room RRS	
W2805	Smooth plaster walls Plaster	TSI Surf. Misc.	Assumed Yes No	F NF X	6	teachers dining room kitchen; teachers wash room RRS, made furniture kitchen	
W2406 W2407	Plaster ceiling Plaster wall Sheetrock	TSI (Surf) Misc.	Assumed Yes No	F NF X			
W2501 W2502 W2503 W2504 W2505	Plaster 1 wall Plaster Sheetrock overhangs	TSI (Surf) Misc.	Assumed Yes No	F NF X		overhang ceiling in all R.F.	

Date _____

145 Dec 72.

Information abstracted by _____

Information abstracted by _____

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)

ACBM assessment category: 1 = Damaged or significantly damaged TSI ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged miscellaneous ACBM, 5 = ACBM with potential for damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable significantly damaged friable surfacing or miscellaneous material, None = No assessment category provided

In original inspection.

Simple Reinspection Form 1. Original AHERA Inspection Information Abstracted from the Management Plan

School Webster E.S. Building 6 Date(s) of Original AHERA Inspection _____

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
W3202	HVAC exhaust vent pipe joint tape	(TSI) Surf. Misc.	Assumed Yes (No)	F NF X		Boiler room ✓	
W3301	pipe insulation	(TSI) Surf. Misc.	Assumed Yes (No)	F NF X		Outside kitchen ✓	
W3401	pipe fitting insulation	(TSI) Surf. Misc.	Assumed Yes (No)	F NF X		outside kitchen ✓	
		TSI Surf. Misc.	Assumed Yes No	F NF X			
		TSI Surf. Misc.	Assumed Yes No	F NF X			
		TSI Surf. Misc.	Assumed Yes No	F NF X			

Inspected by: _____ Date: _____

Information abstracted by: _____ Date: _____

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)
 AHERA assessment category: 1 = Damaged or significantly damaged friable miscellaneous ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

CTL ENVIRONMENTAL SERVICES

FIELD BULK SAMPLE LIST

CLIENT: SHMUSD Technician: V. Sanchez
 PROJECT NO: 1070008 Date: 2-28-07
 PROJECT NAME: Webster ES Page: 1 of

Bldg H

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	stucco	w2404	13th	exterior walls	4000 sq. ft.	N	N
		w2405					
		7871	N.O. EAST				
		7872	SO. CTN				
		7873	ref.				
	Rough Plaster wall	POS. w2101		Jamiron's, electrical rm,	200 sq. ft.	N	N
	Rough Plaster ceiling.	w2001		Jamiron's & electrical rm,	800 sq. ft.	N	N
		7874	CUSTOMER RM N/E				
		7875	Elec. rm. SO. CTN				
	12" STNAIL #7 Peghole LEXEMAR	w1503					
	window putty	7876	W on th. CTN.	ext window	2800 sq. ft.	N	Y

CTL ENVIRONMENTAL SERVICES FIELD BULK SAMPLE LIST

CLIENT: SMUSD Technician: N. Sumner
 PROJECT NO.: 1070008 Date: 2-28-02
 PROJECT NAME: Webster ES Page: 2 of 2

Bldg H.

PHOTO #	MATERIAL	SAMPLE #	SAMPLE LOCATION	MATERIAL LOCATION	EST. QTY.	F	D
	drywall	7877	Rm 2 S/W	HTL closets & south side soffits	956	N	N
	drywall	7878		rooms 1-4	39.75		
		7879	Rm 4 S/W				
		7880	Rm 1 S/W				
	smooth plaster	7881	Rm 4 N/W	classroom	7600	N	N
		7882	Rm 2 N/E	girls riser	54.72		
		7883	Rm 1 S. CN				
		7884	Boys riser N/E				
		7885	girls riser S/W				
		7886	Rm 3 SO. CN				
		7887	Rm 3 N/W				
	Brown Floor tile & Mastic	7888	Rm 4 CTR	rooms 1-4 under carpet.	2800		N
				2800 sq. ft	54.72		

Simple Reinspection Form 1. Original AHERA Inspection Information Abstracted from the Management Plan

School: Webster E.S. Building: H Date(s) of Original AHERA Inspection: _____

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
W1101 ✓	Gypsum ceiling Chadron High Sch.	TSI (Surf.) Misc.	Assumed Yes No	F NF X		Above ceiling panels RMS, 1-4 NO JOINT compound.	
W1503 ✓	12" straight doghole ceiling tile & Mastic	TSI Surf. (Misc.)	Assumed Yes (No)	F NF X		Above ceiling RMS 1-4	
W2006 ✓	Rough plaster ceiling Sample accordingly	TSI (Surf.) Misc.	Assumed Yes No	F NF X			
W2101 ✓	Rough Plaster Doll	TSI (Surf.) Misc.	Assumed (Yes) No 4170	F NF X			
W2404 W2405 ✓	Exterior Stucco Wall Sample accordingly	TSI (Surf.) Misc.	Assumed Yes No	F NF X			
W2501 thru W2505 ✓	Exterior ceiling Stucco	TSI (Surf.) Misc.	Assumed Yes (No)	F NF X		Overhang ceilings on side	

Date: _____

Inspected by: _____
Information abstracted by: _____

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)

AHERA assessment category: 1 = Damaged or significantly damaged friable surfacing ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for significant damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

Sample Reinspection Form 1. Original AHERA Inspection Information Abstracted from the Management Plan

Sample Reinspection Form 1. Original AHERA Inspection Information Abstracted from the Management Plan

Date(s) of Original AHERA Inspection

H

Webster E.S.

Building

School

Homogeneous sampling areas		Material category	Asbestos content	Friability	AHERA assessment category (1-7, X, None)	Recorded locations of material for each assessment category	Response actions taken/renovations/other comments
ID number	Material description						
W2801	Sub Undercoating	TSI	Assumed	F		classroom 4 DMS 2-4 original sinks 4 ea	
W2802		Surf.	Yes	NF			
W2803		Misc.	No	X			
		TSI	Assumed	F			
		Surf.	Yes	NF			
		Misc.	No	X			
		TSI	Assumed	F			
		Surf.	Yes	NF			
		Misc.	No	X			
		TSI	Assumed	F			
		Surf.	Yes	NF			
		Misc.	No	X			
		TSI	Assumed	F			
		Surf.	Yes	NF			
		Misc.	No	X			
		TSI	Assumed	F			
		Surf.	Yes	NF			
		Misc.	No	X			

Date

Inspected by

Information abstracted by

Friability: F = friable, NF = nonfriable, X = not applicable (material is non-ACBM)

AHERA assessment category: 1 = Damaged or significantly damaged TSI ACBM, 2 = Damaged friable surfacing ACBM, 3 = Significantly damaged friable surfacing ACBM, 4 = Damaged or significantly damaged friable miscellaneous ACBM, 5 = ACBM with potential for significant damage, 6 = ACBM with potential for significant damage, 7 = Any remaining friable ACBM or friable suspected ACBM, X = not applicable (material is non-ACBM or nonfriable surfacing or miscellaneous material), None = No assessment category provided in original inspection.

Technician: V. S. Anderson
Date: 2-28-03
Page: 1 of 1

CLIENT: SMHUSD.
PROJECT NO.: 1070008
PROJECT NAME: webster. es.

[illegible]

CTL ENVIRONMENTAL SERVICES FIELD BULK SAMPLE LIST

CLIENT: SHMUSD
PROJECT NO.: 107-0006
PROJECT NAME: Webster, E.S.
Technician: V. Sander
Date: 2-28-07
Page: 1 of 1
webkways

[illegible]

APPENDIX C

SAMPLE LOCATIONS

APPENDIX D

CTL EMPLOYEE CERTIFICATIONS

**State of California
Division of Occupational Safety and Health
Certified Site Surveillance Technician**

Victor M Sanchez

Name

Certification No. 08-4347

Expires on 03/20/09



**This certification was issued by the Division of
Occupational Safety and Health as authorized by
Sections 7160 et seq. of the Business and
Professions Code.**

Certificate Of Completion **Victor Sanchez**


Has attended and completed the training course entitled:

Asbestos Contractor/Supervisor Refresher Course

DOSH Course # CA-015-04

Certificate # AASR061507004N

Training Director: **Alan D. Dages**

Signature: 

Start Date: 06/15/07

Course End Date: 06/15/2007

Expiration Date: 06/14/08

Instructor: Orville Allan

This course satisfies the education requirements for Asbestos accreditation under the Toxic Substances Control Act, Title II. This course has been approved by the Department of Industrial Relations, Division of Occupational Safety and Health of the State of California

NATEC INTERNATIONAL

1100 Technology Circle - Suite A, Anaheim, CA 92805

www.natecintl.com 714/678-2750 800/969-3228 (FAX) 714/678-2757

Certificate Of Completion **Victor Sanchez**

Has attendaea and completed the training course entitled:

Asbestos Building Inspector Refresher Course

DOSH Course # CA-015-06

Certificate # BIRC083107005N

Training Director: **Alan D. Dages**

Signature: 

Start Date: 08/31/07

Course End Date: 08/31/2007

Expiration Date: 08/30/08

Instructor: John Vreeland

This course satisfies the education requirements for Asbestos accreditation under the Toxic Substances Control Act, Title II. This course has been approved by the Department of Industrial Relations, Division of Occupational Safety and Health of the State of California


NATEC INTERNATIONAL

1100 Technology Circle – Suite A, Anaheim, CA 92805

www.natecintl.com 714/678-2750 800/969-3228 (FAX) 714/678-2757

APPENDIX E

PREVIOUS SURVEY RECORD



KEY PLAN



- NOTES:**
1. ASSIGNED ASBESTOS CONTAINING CHAIR-BOARDS LOCATED IN CLASSROOMS.
 2. ASBESTOS CONTAINING WINDOW PUTTY LOCATED ON EXTENSION WINDOW FRAMES.
 3. ASBESTOS CONTAINING CHWAS/1 PLUG JOINT TAPE LOCATED IN MECHANICAL ROOMS.
 4. ASSIGNED ASBESTOS CONTAINING FLEXIBLE CONNECTORS LOCATED IN MECHANICAL ROOMS.
 5. ASSIGNED ASBESTOS CONTAINING FIRE DOORS LOCATED IN MECHANICAL ROOMS.

LEGEND

- | | |
|---|--|
|  | ASBESTOS-CONTAINING 12" x 12" FLOOR TILE AND MASTIC. |
|  | ASBESTOS-CONTAINING 9" x 9" FLOOR TILE AND MASTIC. |

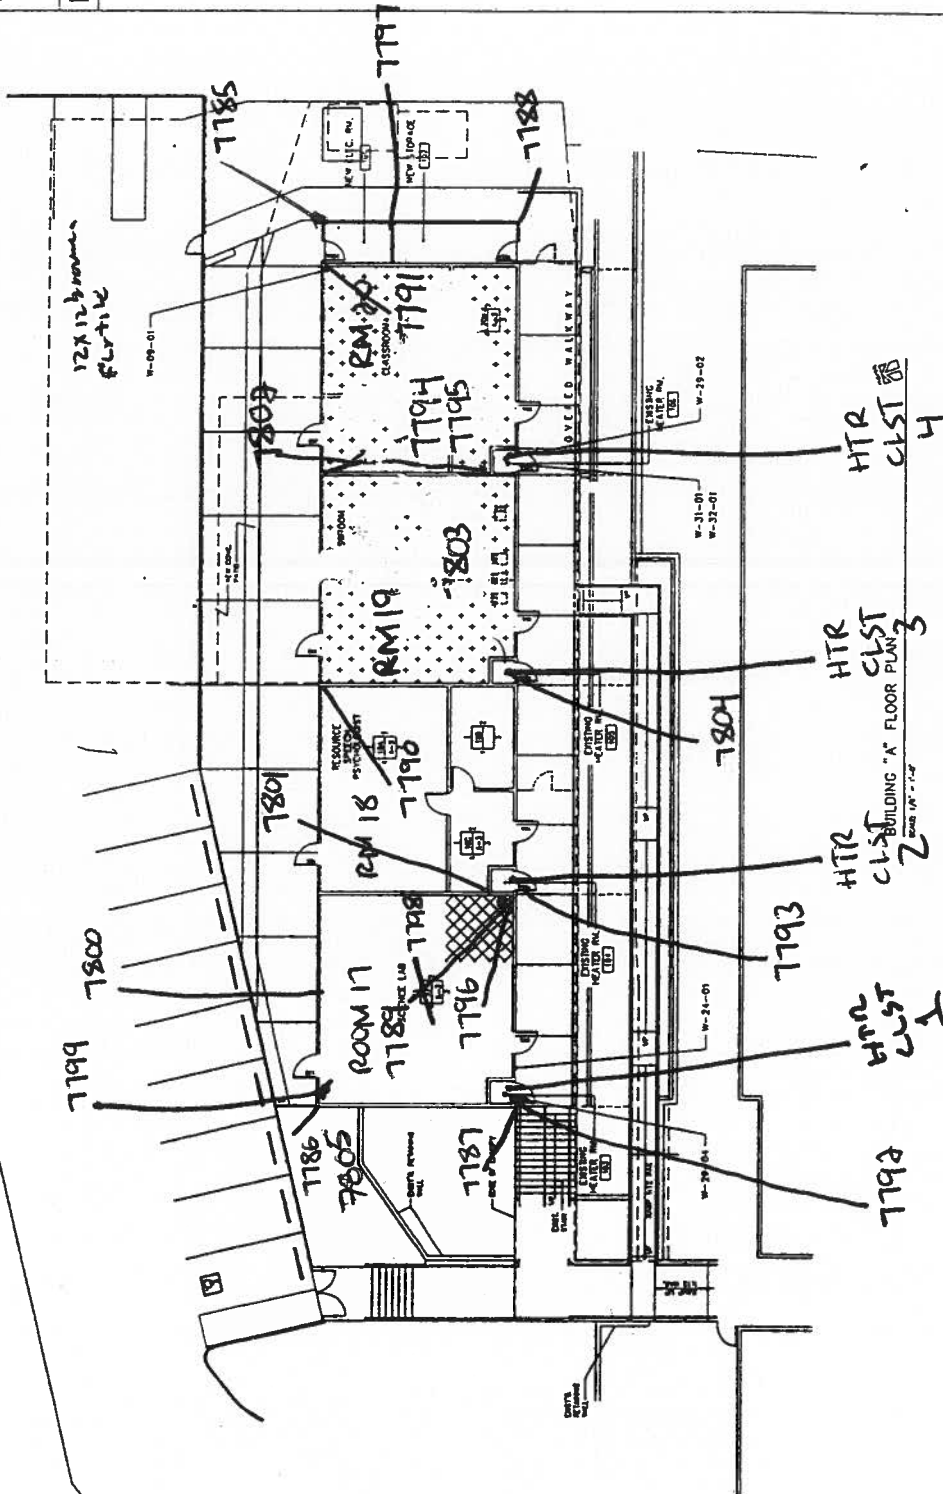



Fig 1A

[illegible]

PROJECT NAME: WEBSTER
ELEMENTARY SCHOOL
SANTA ANITA - UNCLAY
UNCLAY SCHOOL DISTRICT

SHEET NO.:
BUILDING 9
FLOOR PLAN


[illegible]

KEY PLAN

- WISCONSIN
1. ASSUMED ASBESTOS CONTAINING CHAIRBOARDS LOCATED IN CLASSROOMS.
 2. ASBESTOS CONTAINING WINDOW PUTTY LOCATED ON ELEVATOR WINDOW FRAMES.
 3. ASBESTOS CONTAINING EXHAUST FUME SWIFT TAPE LOCATED IN BUILDING.
 4. ASSUMED ASBESTOS CONTAINING FLYING LEAD CONDITIONS LOCATED IN MECHANICAL ROOMS.
 5. ASSUMED ASBESTOS CONTAINING FIRE DOORS LOCATED IN MECHANICAL ROOMS.

LEGEND

- | | |
|---|--|
|  | ASBESTOS-CONTAINING 12' X 12' FLOOR TILE AND MASTIC. |
|  | ASBESTOS-CONTAINING 9' X 9' FLOOR TILE AND MASTIC |

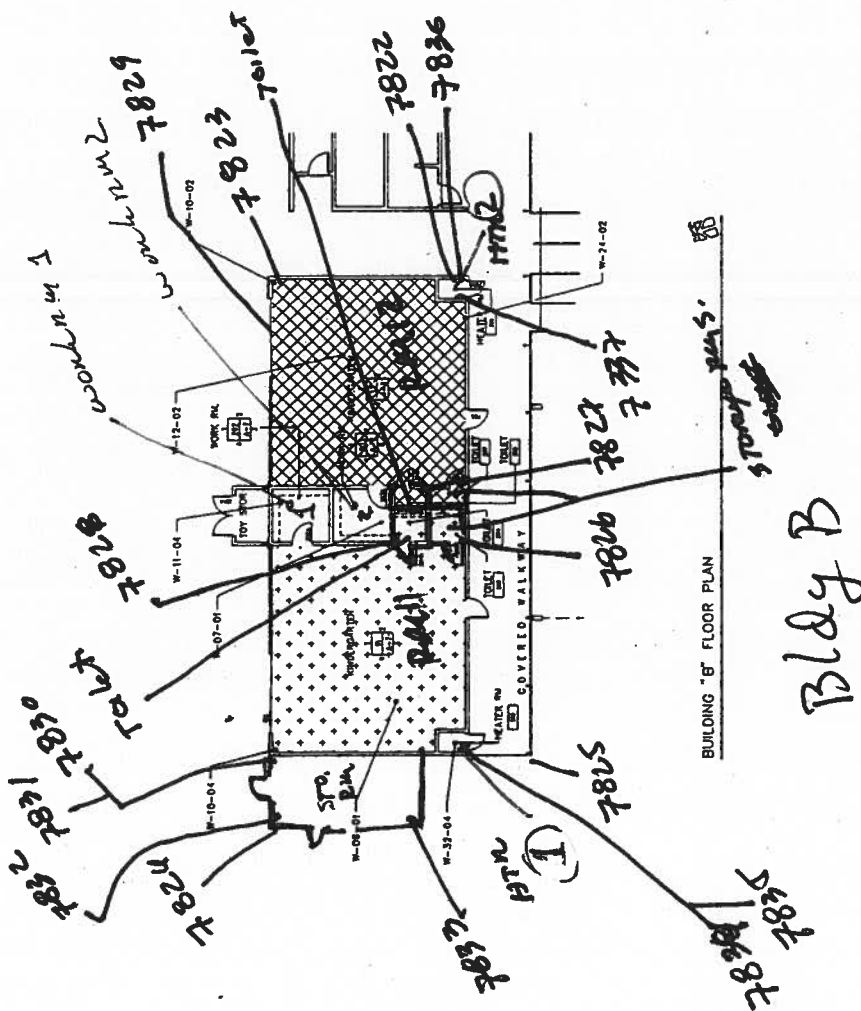

BUILDING "B" FLOOR PLAN

Bldg B


[illegible]

PROJECT NAME: WEBSTER ELEMENTARY SCHOOL

BUILDING C
FLOOR PLAN
SHEET TITLE

1017.28

ASB-03	P. MCKINZIE
	K. GATES



KEY PLAN

NOTES:

1. ASSUMED ASBESTOS CONTAINING CHALKBOARDS LOCATED IN CLASSROOMS.
2. ASBESTOS CONTAINING WINDOW PUTTY LOCATED ON EXTERIOR WINDOW FRAMES.
3. ASSUMED ASBESTOS CONTAINING FLEXIBLE CONNECTORS LOCATED IN MECHANICAL ROOMS.
4. ASSUMED ASBESTOS CONTAINING TIE ROOMS LOCATED IN MECHANICAL ROOMS.

LEGEND



ASBESTOS-CONTAINING 9" x 9"
FLOOR TILE AND MASTIC



1	1
---	---

BUILDING "C"

BUILDING "C" FLOOR PLAN

1980


3/29/20

[illegible]


PROJECT NAME: WEBSTER
ELEMENTARY SCHOOL

SHEET NO.:
BUILDING D
FLOOR PLAN

41017-M					
ASB-04	P. MCKINNON K. GATES	OCT. 92			
WBLDO-D					



KEY PLAN




- NOTES:
1. ASBESTOS CONTAINING WINDOW PUTTY LOCATED ON EXTERIOR WINDOW FRAMES.
 2. ASBESTOS CONTAINING CHALKSTY PLUE JOINT TAPE LOCATED IN MECHANICAL ROOMS.
 3. ASSUMED ASBESTOS CONTAINING FLESHLY CONNECTIONS LOCATED IN MECHANICAL ROOMS.
 4. ASSUMED ASBESTOS CONTAINING FIRE DOORS LOCATED IN MECHANICAL ROOMS.

LEGEND



ASBESTOS-CONTAINING 9" x 9"
FLOOR TILE AND MASTIC

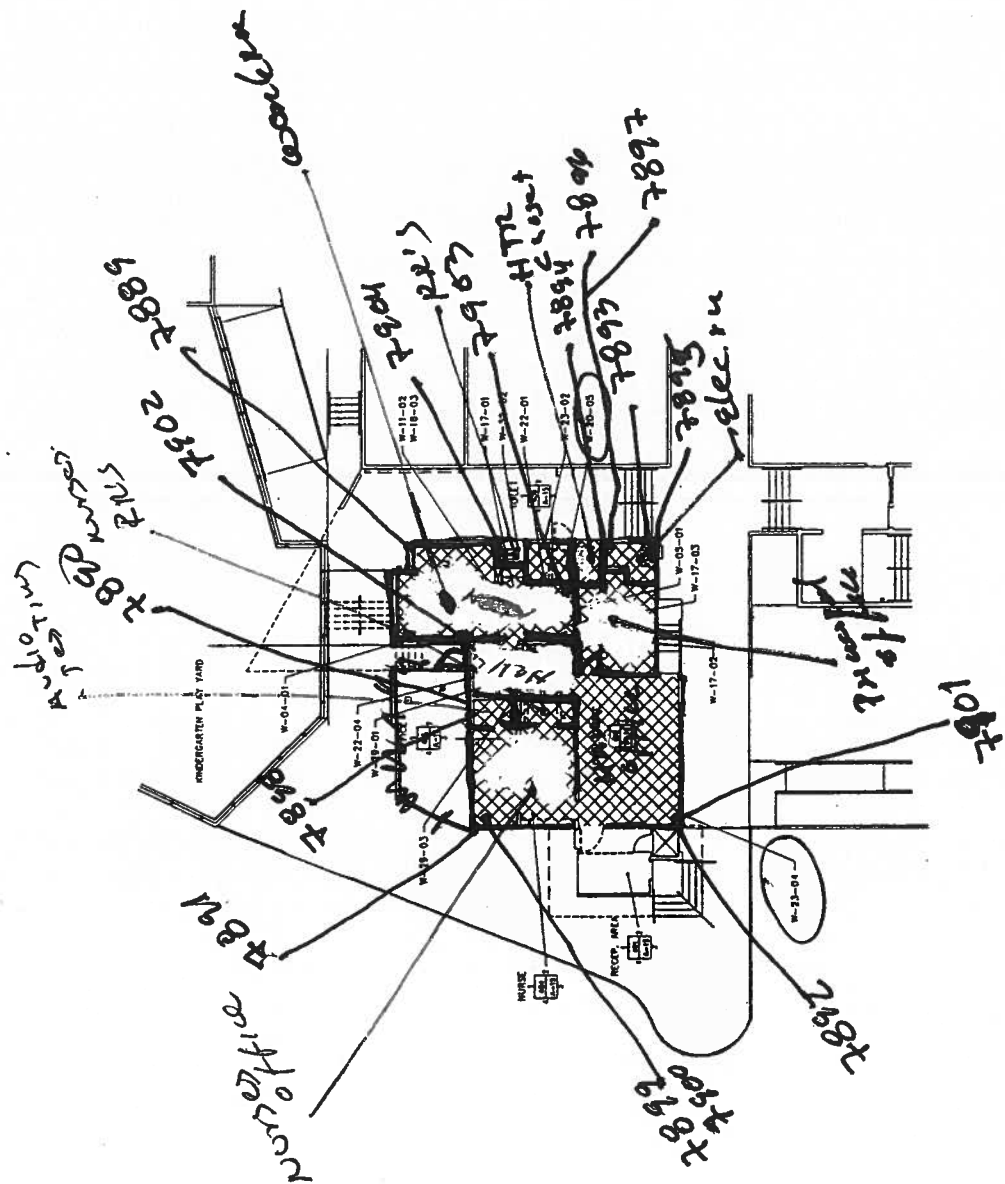

BUILDING "D" FLOOR PLAN
SCALE: 1/8" = 1'-0"

SCALE: 1/8" = 1'-0"




PROJECT
MONTH

BUILDING "D"

10-11-01

1




KEY PLAN

NOTES:

1. ASBESTOS CONTAINING CHALKBOARDS LOCATED IN CLASSROOMS.
2. ASBESTOS CONTAINING WINDOW PUTTY LOCATED ON EXTERIOR WINDOW FRAMES.

LEGEND

ASBESTOS-CONTAINING P.B. P.
FLOOR TILE AND MASTIC

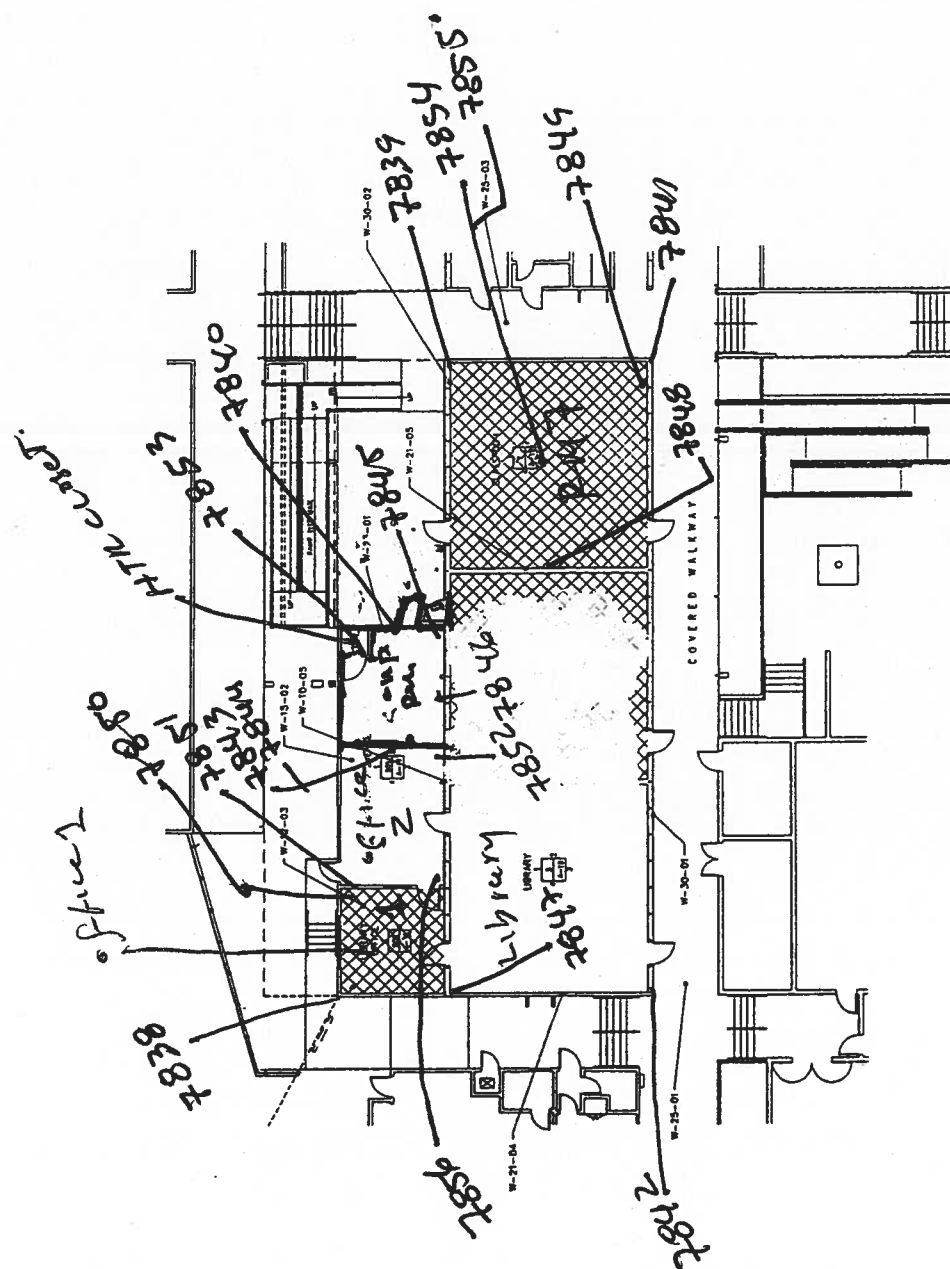

BUILDING "E" FLOOR PLAN

Bldg E

[illegible]


PROJECT NAME: WEBSITE
ELEMENTARY SCHOOL: [redacted]

BUILDING -
FLOOR PLAN
JUL. 1975

.....

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

1-207B
156




KEY PLAN

- NOTES:
1. ASSUMED ASBESTOS CONTAINING CHAL. BOARDS LOCATED IN CLASSROOMS.
 2. ASBESTOS CONTAINING WINDOW BRITLY LOCATED ON EXTERIOR WINDOW FRAMES.
 3. ASSUMED ASBESTOS CONTAINING FLESH CONNECTIONS LOCATED IN MECHANICAL ROOMS.
 4. ASSUMED ASBESTOS CONTAINING FIRE DOORS LOCATED IN MECHANICAL ROOMS.

LEGEND

ASBESTOS-CONTAINING 9" x 9"
FLOOR TILE AND MASTIC

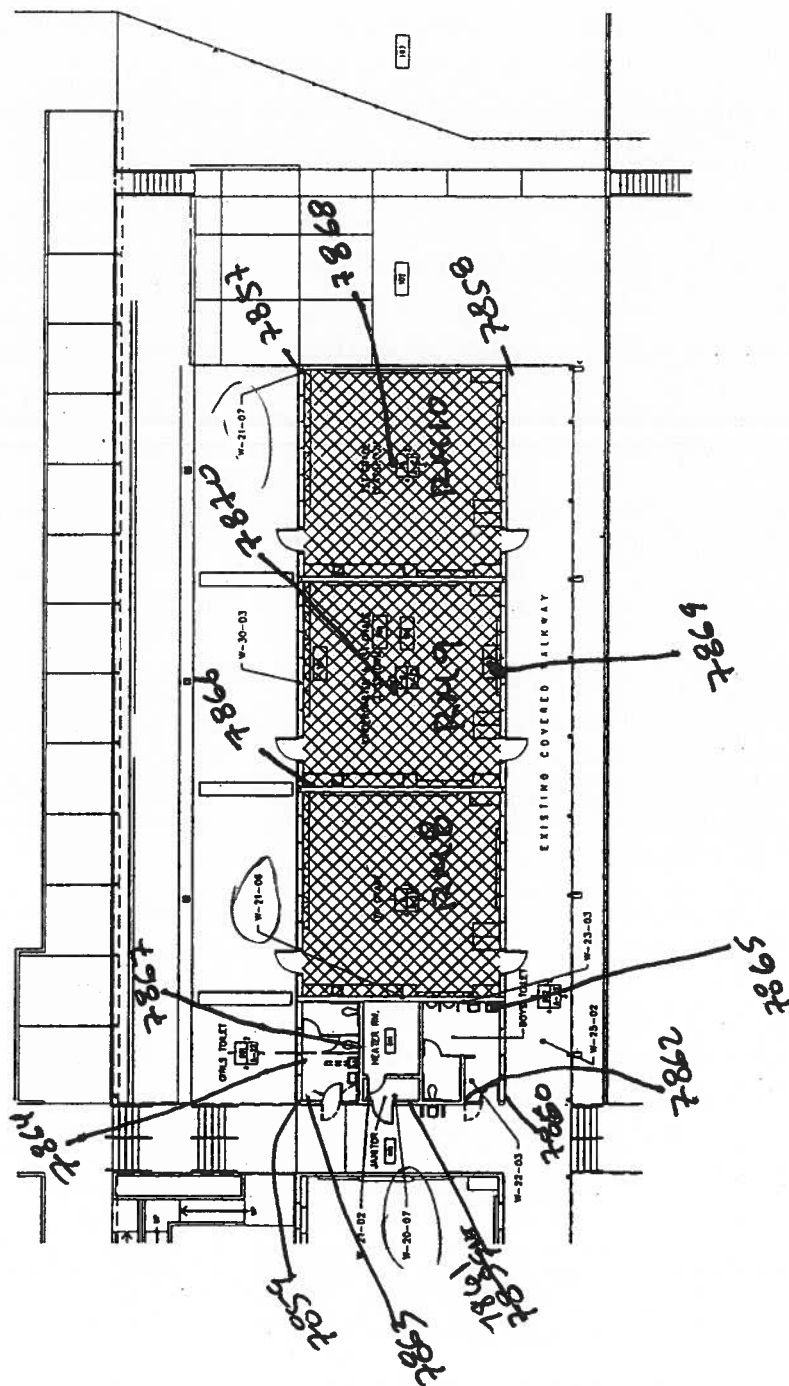

BUILDING "F" FLOOR PLAN

Equation (1)


Bldg F




PROJECT

1	1/8" x 1" - 8"
---	----------------

BUILDING "F"



KEY PLAN

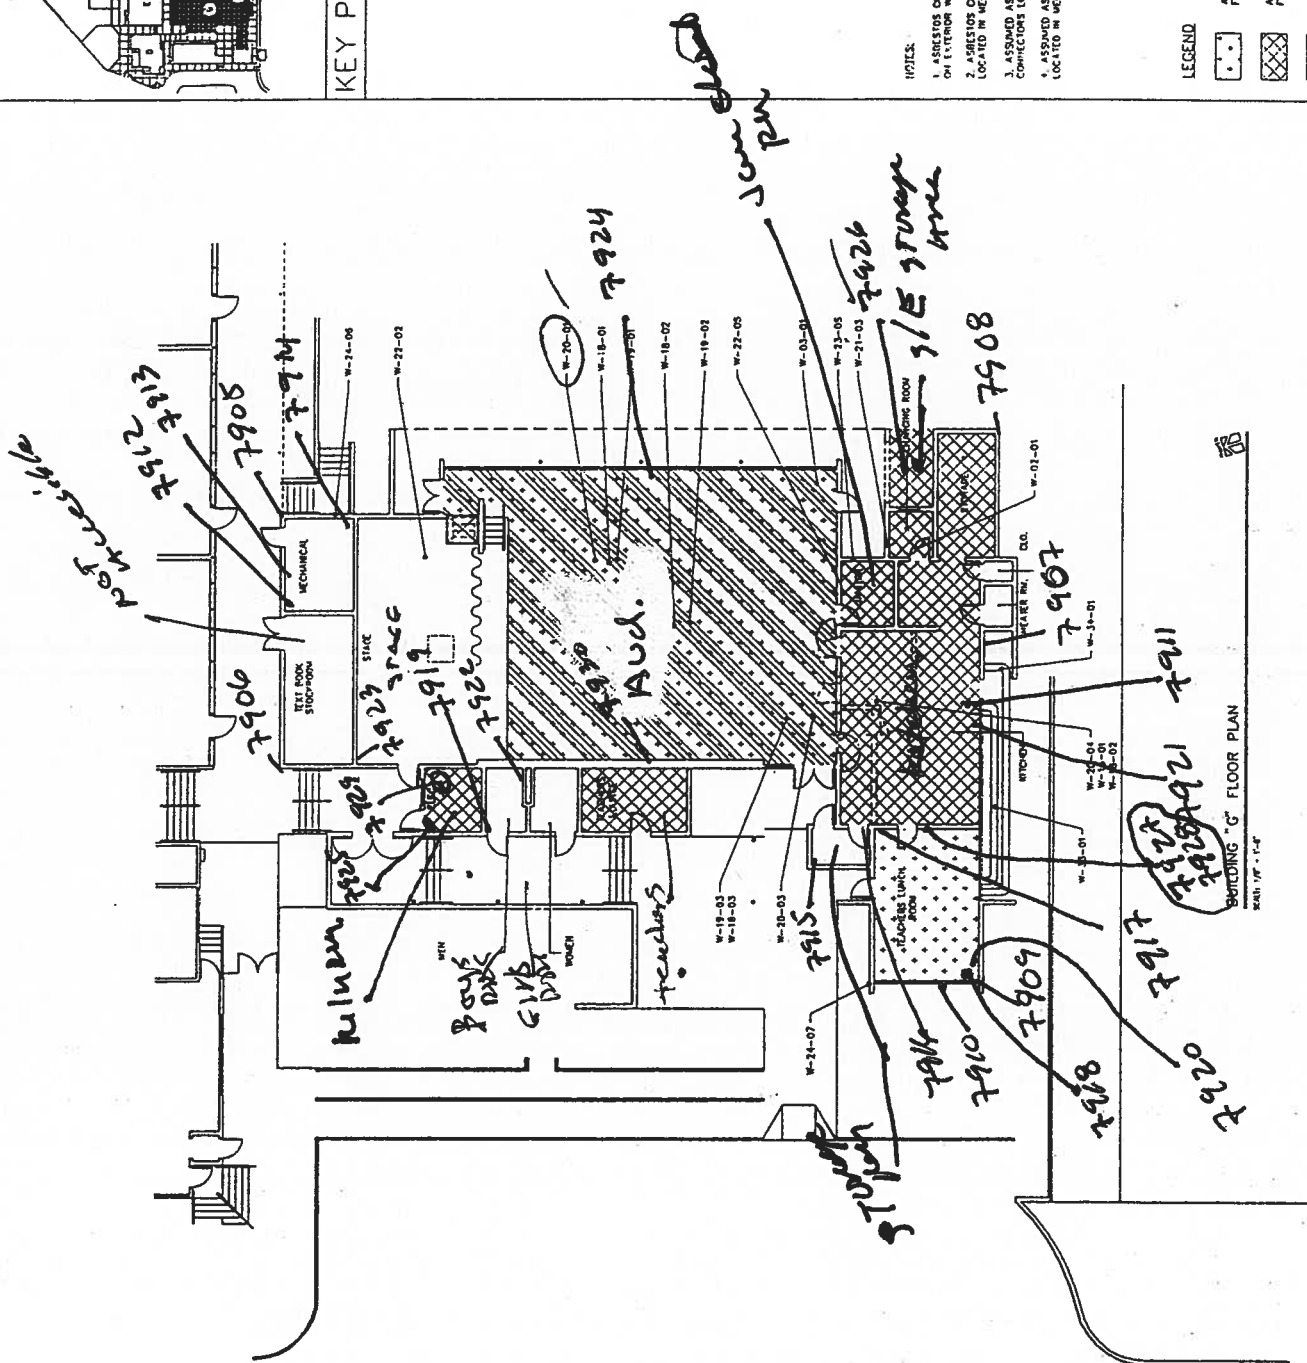

NOTES:

1. ASBESTOS CONTAINING WINDOW PUTTY LOCATED ON EXTERIOR WINDOW FRAMES.
2. ASBESTOS CONTAINING EXHAUST FLOW JOINT TAPE LOCATED IN MECHANICAL ROOMS.
3. ASSUMED ASBESTOS CONTAINING FLEXIBLE CONNECTORS LOCATED IN MECHANICAL ROOMS.
4. ASSUMED ASBESTOS CONTAINING FIRE DOORS LOCATED IN MECHANICAL ROOMS.

LEGEND

ASBESTOS-CONTAINING 12"X 12"
FLOOR TILE AND MASTIC.

ASBESTOS-CONTAINING 9" x 9"
FLOOR TILE AND MASTIC

ASBESTOS--CONTAINING MASTIC UNDER
TIX 1' FISSURED CEILING TILE



PROJECT
NORTH

~~BUILDING "G"~~

$1/2^{\circ} \cdot 1^{\circ} \cdot 0^{\circ}$	1
---	---


20280 3 Vermont Ave
Suite 250
Torrance, CA 90503
(310) 632-4600

QUESTIONS:	Ans.	Ques.	Ans.
1. What is the difference between a simple and a compound sentence?	A simple sentence contains only one clause, while a compound sentence contains two or more clauses joined by a conjunction.	2. What is the difference between a subject and a predicate?	The subject is the person or thing that is doing the action, while the predicate is the action itself.
3. What is the difference between a noun and a verb?	A noun is a word that names a person, place, or thing, while a verb is a word that expresses an action or state of being.	4. What is the difference between an adjective and an adverb?	An adjective is a word that describes a noun, while an adverb is a word that describes a verb.
5. What is the difference between a preposition and a conjunction?	A preposition is a word that shows the relationship between a noun and another word in a sentence, while a conjunction is a word that joins two or more words or sentences.	6. What is the difference between a pronoun and a demonstrative?	A pronoun is a word that replaces a noun, while a demonstrative is a word that points to a specific noun.
7. What is the difference between a participle and a gerund?	A participle is a word that functions as an adjective or a verb, while a gerund is a word that functions as a noun.	8. What is the difference between a clause and a sentence?	A clause is a group of words that contains a subject and a predicate, while a sentence is a group of words that expresses a complete thought.
9. What is the difference between a phrase and a clause?	A phrase is a group of words that does not contain a subject and a predicate, while a clause does.	10. What is the difference between a fragment and a sentence?	A fragment is a group of words that does not express a complete thought, while a sentence does.

PROJECT NAME: WERSIER
ELEMENTARY SCHOOL
12-1501 TOWNSHIP RD
POTOMAC - VA 20854

SHEET TITLE:
BUILDING H
FLOOR PLAN

40	41017.55	ASB-OR	PLACEMINE	K. GATES	OCT. 92
----	----------	--------	-----------	----------	---------




KEY PLAN

- NOTES**
1. ASSUMED ASBESTOS CONTAINING CHALKBOARDS LOCATED IN CLASSROOMS.
 2. ASBESTOS CONTAINING WINDOW PUTTY LOCATED ON EXTERIOR WINDOW FRAMES
 3. ASBESTOS CONTAINING SINK UNDERCOATING LOCATED ON SINKS IN CLASSROOMS.
 4. ASSUMED ASBESTOS CONTAINING FIRE DOORS LOCATED IN MECHANICAL ROOMS.

LEGEND

- ASBESTOS-CONTAINING 9" x 8" FLOOR TILE AND MASTIC
- ASBESTOS-CONTAINING INTERIOR WALL PLASTER

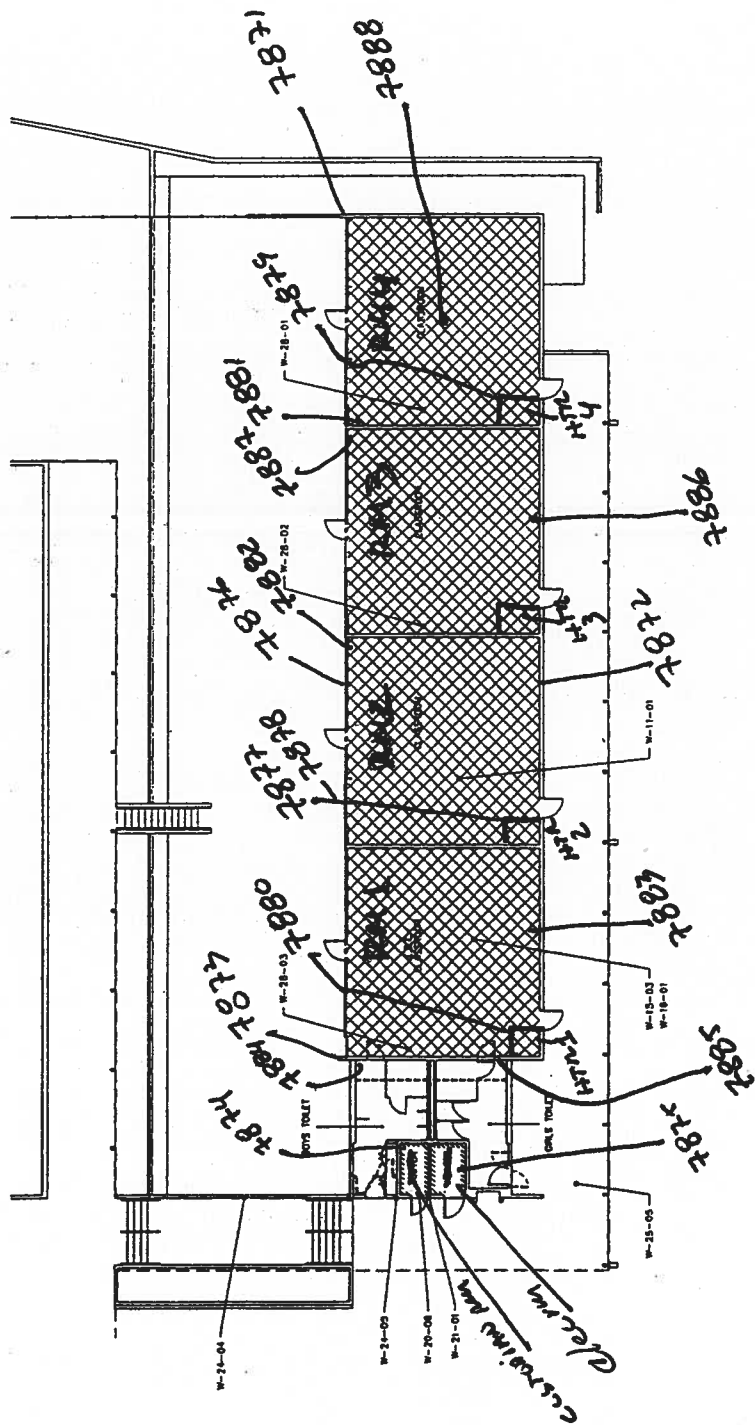

BUILDING "H" FLOOR PLAN



APPENDIX A

TABLE 2.2

**SUMMARY OF QUALITY CONTROL SUSPECT ASBESTOS-CONTAINING MATERIAL
BULK SAMPLE LABORATORY ANALYSIS RESULTS
WEBSTER ELEMENTARY SCHOOL**

<u>SAMPLE NUMBER</u>	<u>MATERIAL DESCRIPTION</u>	<u>PRIMARY LABORATORY</u>	<u>QUALITY CONTROL</u>
QC-W-01-01	9"x 9" tan floor tile	4% chrysotile	2% chrysotile
QC-W-01-01	9"x 9" tan floor tile mastic	NAD	2% chrysotile
QC-W-02-01	9"x 9" dark tan floor tile	5% chrysotile	4% chrysotile
QC-W-02-01	9"x 9" dark tan floor tile mastic	2% chrysotile	2% chrysotile
QC-W-11-01	Gypsum ceiling	NAD	NAD
QC-W-15-01	1'x 1' straight peghole ceiling tile	NAD	NAD
QC-W-19-01	1'x 1' fissured ceiling tile	NAD	NAD
QC-W-22-01	Smooth plaster ceiling	NAD	NAD
QC-W-28-01	Sink undercoating	10% chrysotile	10% chrysotile
QC-W-30-01	Window putty	4% chrysotile	3% chrysotile
NAD	= No Asbestos Detected		

TABLE 2.1

**SUMMARY OF SUSPECT ASBESTOS-CONTAINING MATERIAL
BULK SAMPLE LABORATORY ANALYSIS RESULTS
WEBSTER ELEMENTARY SCHOOL**

<u>SAMPLE NUMBER</u>	<u>MATERIAL DESCRIPTION/LOCATION</u>	<u>LABORATORY ANALYSIS RESULTS</u>
W-01-01	9"x 9" tan floor tile-Building G, kitchen	4% chrysotile
W-01-01	9"x 9" tan floor tile mastic-Building G kitchen	NAD
W-02-01	9"x 9" dark tan floor tile-Building G, storage room	5% chrysotile
W-02-01	9"x 9" dark tan floor tile mastic-Building G, storage room	2% chrysotile
W-03-01	12"x 12" off white floor tile-Building G, auditorium	5% chrysotile
W-03-01	12"x 12" off white floor tile mastic-Building G, auditorium	NAD
W-04-01	9"x 9" dark tan with brown streaks floor tile-Building D, Teachers work room	5% chrysotile
W-04-01	9"x 9" dark tan with brown streaks floor tile mastic-Building D, Teachers work room	3% chrysotile
W-05-01	9"x 9" tan with brown streaks floor tile-Building D, copier room	7% chrysotile
W-05-01	9"x 9" tan with brown streaks floor tile mastic-Building D copier room	10% chrysotile
W-06-01	12"x 12" brown floor tile with white streaks-Building B, kindergarten	3% chrysotile
W-06-01	12"x 12" brown floor tile with white streaks mastic-Building B classroom	5% chrysotile
W-07-01	9"x 9" gray floor tile with yellow streaks-Building B, workroom	5% chrysotile
W-07-01	9"x 9" gray floor tile with yellow streaks mastic-Building B, workroom	10% chrysotile
W-08-01	12"x 12" grey floor tile with brown streaks-Building C, E.S.L. classroom	5% chrysotile
W-08-01	12"x 12" gray floor tile with brown streaks mastic-Building C E.S.L. classroom	10% chrysotile
W-09-01	12"x 12" brown floor tile with peach streaks-Building A classroom #	<1% chrysotile
W-09-01	12"x 12" brown floor tile with peach streaks mastic-Building A classroom #	5% chrysotile
W-10-01	Gypsum walls/joint compound-Building C, E.S.L. classroom	NAD
W-10-02	Gypsum walls/joint compound-Building B, classroom #12	NAD
W-10-03	Gypsum walls/joint compound-Building C, classroom #15	NAD
W-10-04	Gypsum walls/joint compound-Building B, kindergarten classroom	<1% chrysotile
W-10-05	Gypsum walls/joint compound-Building E, library ref. room	NAD
W-11-01	Gypsum ceilings-Building H, classroom #2	NAD
W-11-02	Gypsum ceilings-Building D, copier room	NAD
W-11-03	Gypsum ceilings-Building C, E.S.L. classroom	NAD
W-11-04	Gypsum ceilings-Building B, kindergarten classroom	NAD
W-11-05	Gypsum ceilings-Building C, classroom #15	NAD
W-12-01	1'x 1' random peghole ceiling tile (new)-Building C, classroom #14	NAD
W-12-02	1'x 1' random peghole ceiling tile-Building B, classroom #12	NAD
W-12-03	1'x 1' random peghole ceiling tile-Building E, library office	NAD
W-13-01	1'x 1' random pin hole ceiling tile-Building C, E.S.L. classroom	NAD
W-13-02	1'x 1' random pin hole ceiling tile-Building C, E.S.L. classroom	NAD
W-13-03	1'x 1' random pin hole ceiling tile-Building C, E.S.L. classroom	NAD

TABLE 2.1 (cont)

<u>SAMPLE NUMBER</u>	<u>MATERIAL DESCRIPTION/LOCATION</u>	<u>LABORATORY ANALYSIS RESULTS</u>
W-14-01	1'x 1' random pin hole ceiling tile mastic-Building C, E.S.L. classroom	NAD
W-14-02	1'x 1' random pin hole ceiling tile mastic-Building C, E.S.L. classroom	NAD
W-14-03	1'x 1' random pin hole ceiling tile mastic-Building C, E.S.L. classroom	NAD
W-15-01	1'x 1' straight peghole ceiling tile-Building G, kitchen	NAD
W-15-02	1'x 1' straight peghole ceiling tile-Building D, library reference room	NAD
W-15-03	1'x 1' straight peghole ceiling tile-Building H, classroom #	NAD
W-16-01	1'x 1' straight peghole ceiling tile mastic-Building H, classroom #1	NAD
W-16-02	1'x 1' straight peghole ceiling tile mastic-Building G, kitchen	NAD
W-16-03	1'x 1' straight peghole ceiling tile mastic-Building D, copier room	NAD
W-17-01	1'x 1' random peghole ceiling tile (old)-Building D, copier room	NAD
W-17-02	1'x 1' random peghole ceiling tile (old)-Building D, copier room	NAD
W-17-03	1'x 1' random peghole ceiling tile (old)-Building D, copier room	NAD
W-18-01	1'x 1' fissured ceiling tile-Building G, auditorium	NAD
W-18-02	1'x 1' fissured ceiling tile-Building G, auditorium	NAD
W-18-03	1'x 1' fissured ceiling tile-Building G, auditorium	NAD
W-19-01	1'x 1' fissured ceiling tile mastic-Building G, auditorium	NAD
W-19-02	1'x 1' fissured ceiling tile mastic-Building G, auditorium	3% chrysotile
W-19-03	1'x 1' fissured ceiling tile mastic-Building G, auditorium	NAD
W-20-01	Rough plaster ceilings-Building G, auditorium	NAD
W-20-02	Rough plaster ceilings-Building G, auditorium	NAD
W-20-03	Rough plaster ceilings-Building G, auditorium	NAD
W-20-04	Rough plaster ceilings-Building G, kitchen	NAD
W-20-05	Rough plaster ceilings-Building D, bathroom	NAD
W-20-06	Rough plaster ceilings-Building H, heater room	NAD
W-20-07	Rough plaster ceilings-Building F, heater room	NAD
W-21-01	Rough plaster walls-Building H, heater room	<1% chrysotile
W-21-02	Rough plaster walls-Building F, heater room	NAD
W-21-03	Rough plaster walls-Building G, outside janitor's room	NAD
W-21-04	Rough plaster walls-Building E, library	NAD
W-21-05	Rough plaster walls-Building E, classroom	NAD
W-21-06	Rough plaster walls-Building F, 4th grade classroom	NAD
W-21-07	Rough plaster walls-Building F, 1st grade classroom	NAD
W-22-01	Smooth plaster ceilings-Building D, bathroom	NAD
W-22-02	Smooth plaster ceilings-Building G, stage	NAD
W-22-03	Smooth plaster ceilings-Building F, boys bathroom	NAD
W-22-04	Smooth plaster ceilings-Building D, HVAC closet	NAD
W-22-05	Smooth plaster ceilings-Building G, janitor's room	NAD
W-23-01	Smooth plaster walls-Building E, library reference room	NAD
W-23-02	Smooth plaster walls-Building D, bathroom	NAD
W-23-03	Smooth plaster walls-Building F, boys bathroom	NAD
W-23-04	Smooth plaster walls-Building D, administration office	NAD
W-23-05	Smooth plaster walls-Building G, outside janitor's room	NAD
W-24-01	Exterior stucco walls-Building A, outside room #17	NAD
W-24-02	Exterior stucco walls-Building B, outside classroom #12	NAD
W-24-03	Exterior stucco walls-Building C, classroom #14	NAD

TABLE 2.1 (cont)

<u>SAMPLE NUMBER</u>	<u>MATERIAL DESCRIPTION/LOCATION</u>	<u>LABORATORY ANALYSIS RESULTS</u>
W-24-04	Exterior stucco walls-Building H, breeze way north west of Building H	NAD
W-24-05	Exterior stucco walls-Building H, west side	NAD
W-24-06	Exterior stucco walls-Building G, outside mechanical room	NAD
W-24-07	Exterior stucco walls-Building G, outside teachers lunch room	NAD
W-25-01	Exterior stucco overhang-Building E & G, breeze way between	NAD
W-25-02	Exterior stucco overhang-Building F, west end of walkway	NAD
W-25-03	Exterior stucco overhang-Building E & F	NAD
W-25-04	Exterior stucco overhang-Building B & C, breeze way between	NAD
W-25-05	Exterior stucco overhang-Building H, walkway	NAD
W-28-01	Sink undercoating-Building H, classroom #4	10% chrysotile
W-28-02	Sink undercoating-Building H, classroom #3	15% chrysotile
W-28-03	Sink undercoating-Building H, classroom #1	15% chrysotile
W-29-01	HVAC duct insulation-Building D, closet	NAD
W-29-02	Canvas wrap duct insulation-Building A, HVAC room	NAD
W-29-03	Canvas wrap duct insulation-Building D, nurse's office	NAD
W-29-04	Canvas wrap duct insulation-Building A-HVAC room	NAD
W-30-01	Window putty-Building E, library	4% chrysotile
W-30-02	Window putty-Building E, classroom	7% chrysotile
W-30-03	Window putty-Building F, outside kindergarten & 1st grade classroom	7% chrysotile
W-31-01	Flex connectors-HVAC room, Building A	Assumed
W-32-01	HVAC exhaust vent pipe joint tape-Building D, HVAC room	70% chrysotile
W-32-02	HVAC exhaust vent pipe joint tape-Building G, Boiler room	NAD
W-32-03	HVAC exhaust vent pipe joint tape-Building B, Boiler room	70% chrysotile
W-32-04	HVAC exhaust vent pipe joint tape-Building B, Boiler room	60% chrysotile
W-33-01	Pipe insulation-Building G, Outside kitchen	NAD
W-34-01	Pipe fittings insulation-Building G, Outside kitchen	NAD
W-36-01	Chalkboards-Throughout school	Assumed

APPENDIX D

APPENDIX E

INSERT DOCUMENTATION FROM SUBSEQUENT ASBESTOS ABATEMENT PROJECTS

BUILDING INSPECTION REPORT AND ASBESTOS MANAGEMENT PLAN

BUILDING NUMBER : Bldg B

ASBESTOS-CONTAINING MATERIAL DESCRIPTION : 12"X12" BROWN w/white streaks FT w/mas

HOMOGENEOUS AREA # : 6

FUNCTIONAL AREA : kindergarten class Room

TYPE OF MATERIAL : SURFACING _____ THERMAL SYSTEM INSULATION _____ MISC. ☒

APPROXIMATE QUANTITY : 900 sq ft

FRIABILITY : NON-FRIABLE ☒
MODERATELY FRIABLE _____
FRIABLE _____

MATERIAL LOCATIONS : Bldg B Kindergarten Classroom # 11

SAMPLE #SAMPLE LOCATIONANALYSIS RESULTSCONDITION OF ACM OR ACE:

Percent Distributed damage: None

Type of damage: No Damage

Overall rating: Good Condition (3)

POTENTIAL FOR DISTURBANCE OF ACM OR ACE:

Potential for contact:

Influence of vibration:

Potential for air erosion:

LOW			HIGH	
1	2	3	4	5
—	—	✓	—	—
—	✓	—	—	—
—	✓	—	—	—

IS MATERIAL ACCESSIBLE?:

Yes

IS MATERIAL LOCATED IN AN AIR PLENUM?:

NO

MANAGEMENT PLANNER'S HAZARD ASSESSMENT: Good Condition with potential for damageMANAGEMENT PLANNER'S RECOMMENDED RESPONSE ACTION: Take steps to reduce potential for disturbanceINSPECTOR'S COMMENTS:

Intact

Continue

O & M

BUILDING INSPECTION REPORT AND ASBESTOS MANAGEMENT PLAN

BUILDING NUMBER : Bldg. B

ASBESTOS-CONTAINING MATERIAL DESCRIPTION : 9'x9' Gray w/ yellow streaks ~~PT~~ w/ mass

HOMOGENEOUS AREA # : 7

FUNCTIONAL AREA : Work Room

TYPE OF MATERIAL : SURFACING _____ THERMAL SYSTEM INSULATION _____ MISC. ☒

APPROXIMATE QUANTITY : 900 SF

FRIABILITY : NON-FRIABLE ☒
MODERATELY FRIABLE _____
FRIABLE _____

MATERIAL LOCATIONS : Bldg B Work Room room 12

<u>SAMPLE #</u>	<u>SAMPLE LOCATION</u>	<u>ANALYSIS RESULTS</u>
-----------------	------------------------	-------------------------

CONDITION OF ACM OR ACE:

Percent Distributed damage:
Type of damage:
Overall rating:

None

No Damage

Good Condition

(3)

POTENTIAL FOR DISTURBANCE OF ACM OR ACE:

Potential for contact:
Influence of vibration:
Potential for air erosion:

LOW			HIGH	
1	2	3	4	5
—	—	✓	—	—
—	✓	—	—	—
—	✓	—	—	—

IS MATERIAL ACCESSIBLE?:

Yes

IS MATERIAL LOCATED IN AN AIR PLENUM?:

No

MANAGEMENT PLANNER'S HAZARD ASSESSMENT: Good condition with potential for damageMANAGEMENT PLANNER'S RECOMMENDED RESPONSE ACTION: O&M, reduce potential for disturbanceINSPECTOR'S COMMENTS:

Intact Continue O&M

WEBSTER ELEM

BUILDING INSPECTION REPORT AND ASBESTOS MANAGEMENT PLAN

BUILDING NUMBER : B, D

ASBESTOS-CONTAINING MATERIAL DESCRIPTION : HVAC Exhaust Vent Pipe Joint Tape

HOMOGENEOUS AREA # : 32

FUNCTIONAL AREA : HVAC Room, Boiler Rm.

TYPE OF MATERIAL : SURFACING _____ THERMAL SYSTEM INSULATION _____ MISC. ☒

APPROXIMATE QUANTITY : 1

FRIABILITY :
NON-FRIABLE ☒
MODERATELY FRIABLE _____
FRIABLE _____

MATERIAL LOCATIONS : Bldg B, D HVAC, Boiler Rm.

SAMPLE # SAMPLE LOCATION ANALYSIS RESULTS

CONDITION OF ACM OR ACE:

Percent Distributed damage:

Type of damage:

Overall rating:

None Damage

No Damage

Good Condition

(3)

POTENTIAL FOR DISTURBANCE OF ACM OR ACE:

Potential for contact:

Influence of vibration:

Potential for air erosion:

LOW					HIGH
1	2	3	4	5	
—	✓	—	—	—	
—	✓	—	—	—	
—	✓	—	—	—	

IS MATERIAL ACCESSIBLE?:

Yes

IS MATERIAL LOCATED IN AN AIR PLENUM?:

Yes

MANAGEMENT PLANNER'S HAZARD ASSESSMENT:

Good condition with potential for damage

MANAGEMENT PLANNER'S RECOMMENDED RESPONSE ACTION: Continue O & M

INSPECTOR'S COMMENTS:

Intact Continue O & M

BUILDING INSPECTION REPORT AND ASBESTOS MANAGEMENT PLAN

BUILDING NUMBER : B?

ASBESTOS-CONTAINING MATERIAL DESCRIPTION : Gypsum wall/joint compound

HOMOGENEOUS AREA # : 10

FUNCTIONAL AREA : Classroom #12, Kindergarten

TYPE OF MATERIAL : SURFACING _____ THERMAL SYSTEM INSULATION _____ MISC. ☒

APPROXIMATE QUANTITY : _____

FRIABILITY :
NON-FRIABLE ☒
MODERATELY FRIABLE ☒
FRIABLE _____

MATERIAL LOCATIONS : Bldg B Classroom #12, Kindergarten

<u>SAMPLE #</u>	<u>SAMPLE LOCATION</u>	<u>ANALYSIS RESULTS</u>
-----------------	------------------------	-------------------------

CONDITION OF ACM OR ACE:

Percent Distributed damage:

Type of damage:

Overall rating:

None
No Damage
Good Condition (2)

POTENTIAL FOR DISTURBANCE OF ACM OR ACE:

Potential for contact:

Influence of vibration:

Potential for air erosion:

LOW			HIGH	
1	2	3	4	5
—	—	✓	—	—
—	—	✓	—	—
—	✓	—	—	—

IS MATERIAL ACCESSIBLE?:

yes

IS MATERIAL LOCATED IN AN AIR PLENUM?:

No

MANAGEMENT PLANNER'S HAZARD ASSESSMENT: Good condition with potential for damageMANAGEMENT PLANNER'S RECOMMENDED RESPONSE ACTION: Continue O&M, reduce potential for disturbanceINSPECTOR'S COMMENTS:

Continue O&M

WEBSTER KLM.

BUILDING INSPECTION REPORT AND ASBESTOS MANAGEMENT PLAN

BUILDING NUMBER : Bldg C

ASBESTOS-CONTAINING MATERIAL DESCRIPTION : 12"X12" Grey w/BROWN STREAKS FT w/MASTIC

HOMOGENEOUS AREA # : 8

FUNCTIONAL AREA : ESL Class Rooms

TYPE OF MATERIAL : SURFACING _____ THERMAL SYSTEM INSULATION _____ MISC. ☒

APPROXIMATE QUANTITY : 5000SF

FRIABILITY :
NON-FRIABLE ☒
MODERATELY FRIABLE _____
FRIABLE _____

MATERIAL LOCATIONS : Bldg C ESL Class Rooms 13-16, 16A

SAMPLE # SAMPLE LOCATION ANALYSIS RESULTS

CONDITION OF ACM OR ACE:

Percent Distributed damage:

None

Type of damage:

No Damage

Overall rating:

Good Condition

(3)

POTENTIAL FOR DISTURBANCE OF ACM OR ACE:

Potential for contact:

Influence of vibration:

Potential for air erosion:

LOW			HIGH		
1	2	3	4	5	
—	—	—	—	—	
—	✓	—	—	—	
—	✓	—	—	—	

IS MATERIAL ACCESSIBLE?:

Yes

IS MATERIAL LOCATED IN AN AIR PLENUM?:

No

MANAGEMENT PLANNER'S HAZARD ASSESSMENT:

Good Condition with potential for damage

MANAGEMENT PLANNER'S RECOMMENDED RESPONSE ACTION:

Reduce potential for disturbance

INSPECTOR'S COMMENTS:

Intact Continue O & M

Webster

BUILDING INSPECTION REPORT AND ASBESTOS MANAGEMENT PLAN

BUILDING NUMBER : D
ASBESTOS-CONTAINING MATERIAL DESCRIPTION : 94 x 94 light brown floor tile
HOMOGENEOUS AREA # :
FUNCTIONAL AREA : Admin. (offices)

TYPE OF MATERIAL : SURFACING _____ THERMAL SYSTEM INSULATION _____ MISC. ✓

APPROXIMATE QUANTITY : 3000 SF

FRIABILITY : NON-FRIABLE ✓
MODERATELY FRIABLE _____
FRIABLE _____

MATERIAL LOCATIONS : Offices

SAMPLE # SAMPLE LOCATION ANALYSIS RESULTS

CONDITION OF ACM OR ACE:

Percent Distributed damage:
Type of damage:
Overall rating:

None
No Damage
Good Condition (3)

POTENTIAL FOR DISTURBANCE OF ACM OR ACE:

Potential for contact:
Influence of vibration:
Potential for air erosion:

LOW			HIGH	
1	2	3	4	5
—	—	✓	—	—
—	✓	—	—	—
—	✓	—	—	—

IS MATERIAL ACCESSIBLE?:

-yes

IS MATERIAL LOCATED IN AN AIR PLENUM?:

No

MANAGEMENT PLANNER'S HAZARD ASSESSMENT:

Good condition with potential for damage

MANAGEMENT PLANNER'S RECOMMENDED RESPONSE ACTION:

Continue O & M

INSPECTOR'S COMMENTS:

Good Condition
Intact Continue O & M

WEBSTER

BUILDING INSPECTION REPORT AND ASBESTOS MANAGEMENT PLAN

BUILDING NUMBER : E (CLASSROOMS 5-7)
ASBESTOS-CONTAINING MATERIAL DESCRIPTION : 9" x 9" light brown floor tile
HOMOGENEOUS AREA # :
FUNCTIONAL AREA : classrooms

TYPE OF MATERIAL : SURFACING _____ THERMAL SYSTEM INSULATION _____ MISC. ☒

APPROXIMATE QUANTITY : 3000

FRIABILITY : NON-FRIABLE ☒
MODERATELY FRIABLE _____
FRIABLE _____

MATERIAL LOCATIONS : classrooms 5-7

SAMPLE # SAMPLE LOCATION ANALYSIS RESULTS

CONDITION OF ACM OR ACE:

Percent Distributed damage: None
Type of damage: No Damage
Overall rating: Good Condition (3)

POTENTIAL FOR DISTURBANCE OF ACM OR ACE:

	LOW	1	2	3	4	5	HIGH
Potential for contact:						✓	
Influence of vibration:			✓				
Potential for air erosion:			✓				

IS MATERIAL ACCESSIBLE?:

~~Yes~~ No

IS MATERIAL LOCATED IN AN AIR PLENUM?:

MANAGEMENT PLANNER'S HAZARD ASSESSMENT:

Good Condition with potential for damage

MANAGEMENT PLANNER'S RECOMMENDED RESPONSE ACTION:

Should continue O & M

INSPECTOR'S COMMENTS:

Intact Continue O & M

Tiles in classroom #5 underneath Carpet

WEBSTER

BUILDING INSPECTION REPORT AND ASBESTOS MANAGEMENT PLAN

BUILDING NUMBER :

F

ASBESTOS-CONTAINING MATERIAL DESCRIPTION :

9" x 9" , brown floor tile

HOMOGENEOUS AREA # :

FUNCTIONAL AREA :

classrooms

TYPE OF MATERIAL : SURFACING

THERMAL SYSTEM INSULATION

MISC.

✓

APPROXIMATE QUANTITY :

3000 SF

FRIABILITY :

NON-FRIABLE

✓

MODERATELY FRIABLE

FRIABLE

MATERIAL LOCATIONS :

classrooms

SAMPLE #

SAMPLE LOCATION

ANALYSIS RESULTS

CONDITION OF ACM OR ACE:

Percent Distributed damage:

None

Type of damage:

No Damage

Overall rating:

Good Condition

(3)

POTENTIAL FOR DISTURBANCE OF ACM OR ACE:

Potential for contact:

Influence of vibration:

Potential for air erosion:

LOW

HIGH

1 2 3 4 5

✓

✓

✓

IS MATERIAL ACCESSIBLE?:

Yes

IS MATERIAL LOCATED IN AN AIR PLENUM?:

No

MANAGEMENT PLANNER'S HAZARD ASSESSMENT:

Good Condition with potential for damage

MANAGEMENT PLANNER'S RECOMMENDED RESPONSE ACTION:

Continue O & M

INSPECTOR'S COMMENTS:

Intact

Continue

O & M

BUILDING INSPECTION REPORT AND ASBESTOS MANAGEMENT PLAN

BUILDING NUMBER : E, F
 ASBESTOS-CONTAINING MATERIAL DESCRIPTION : window caulking
 HOMOGENEOUS AREA # : 30
 FUNCTIONAL AREA : Library, Class Room

TYPE OF MATERIAL : SURFACING _____ THERMAL SYSTEM INSULATION _____ MISC. ☒

APPROXIMATE QUANTITY : 10

FRIABILITY :
 NON-FRIABLE _____
 MODERATELY FRIABLE ☒
 FRIABLE ☒

MATERIAL LOCATIONS : Bldg E Library, classRoom / Bldg F classRoom

SAMPLE # SAMPLE LOCATION ANALYSIS RESULTS

CONDITION OF ACM OR ACE:

Percent Distributed damage:
 Type of damage:
 Overall rating:

None
 No Damage
 Good Condition (2)

POTENTIAL FOR DISTURBANCE OF ACM OR ACE:

Potential for contact:
 Influence of vibration:
 Potential for air erosion:

LOW			HIGH	
1	2	3	4	5
—	—	✓	—	—
—	✓	—	—	—
—	✓	—	—	—

IS MATERIAL ACCESSIBLE?: Yes

IS MATERIAL LOCATED IN AN AIR PLENUM?: No

MANAGEMENT PLANNER'S HAZARD ASSESSMENT: Good Condition with low potential for damage

MANAGEMENT PLANNER'S RECOMMENDED RESPONSE ACTION: Should continue O & M

INSPECTOR'S COMMENTS: Continue O & M

BUILDING INSPECTION REPORT AND ASBESTOS MANAGEMENT PLAN

BUILDING NUMBER : G (Auditorium)
 ASBESTOS-CONTAINING MATERIAL DESCRIPTION : 9"x9" ^{brown} Dark Tan Floor Tile w/ Mastic
 HOMOGENEOUS AREA # : 2
 FUNCTIONAL AREA : Storage Room

TYPE OF MATERIAL : SURFACING _____ THERMAL SYSTEM INSULATION _____ MISC. ☒

APPROXIMATE QUANTITY : 70 sq ft

FRIABILITY : NON-FRIABLE ☒
 MODERATELY FRIABLE _____
 FRIABLE _____

MATERIAL LOCATIONS : Bldg G Storage Room

SAMPLE # SAMPLE LOCATION ANALYSIS RESULTS

CONDITION OF ACM OR ACE:

Percent Distributed damage:
 Type of damage:
 Overall rating:

~~Damaged~~ Moderate Damage < 10%
 Missing tiles
 Fair (4)

POTENTIAL FOR DISTURBANCE OF ACM OR ACE:

Potential for contact:
 Influence of vibration:
 Potential for air erosion:

LOW					HIGH				
1	2	3	4	5					
—	—	✓	—	—					
—	—	✓	—	—					
—	✓	—	—	—					

IS MATERIAL ACCESSIBLE?:

Yes

IS MATERIAL LOCATED IN AN AIR PLENUM?: No

MANAGEMENT PLANNER'S HAZARD ASSESSMENT: Damaged with low potential for significant da

MANAGEMENT PLANNER'S RECOMMENDED RESPONSE ACTION: Replace missing tiles or remove if feasible

INSPECTOR'S COMMENTS:

Repair

WED 10/17

BUILDING INSPECTION REPORT AND ASBESTOS MANAGEMENT PLAN

BUILDING NUMBER : 6

ASBESTOS-CONTAINING MATERIAL DESCRIPTION : 12" x 12" off-white Floor Tile

HOMOGENEOUS AREA # : 3

FUNCTIONAL AREA : auditorium, kitchen lunchroom

TYPE OF MATERIAL : SURFACING _____ THERMAL SYSTEM INSULATION _____ MISC. ☒

APPROXIMATE QUANTITY : 2800

FRIABILITY : NON-FRIABLE ☒
MODERATELY FRIABLE _____
FRIABLE _____

MATERIAL LOCATIONS : Bldg 6 Auditorium, kitchen lunchroom

SAMPLE # SAMPLE LOCATION ANALYSIS RESULTS

CONDITION OF ACM OR ACE:

Percent Distributed damage:

Type of damage:

Overall rating:

None ~~Damage~~
No Damage
Good Condition (3)

POTENTIAL FOR DISTURBANCE OF ACM OR ACE:

Potential for contact:

Influence of vibration:

Potential for air erosion:

LOW			HIGH	
1	2	3	4	5
—	—	✓	—	—
—	✓	—	—	—
—	✓	—	—	—

IS MATERIAL ACCESSIBLE?:

Yes

IS MATERIAL LOCATED IN AN AIR PLENUM?:

No

MANAGEMENT PLANNER'S HAZARD ASSESSMENT:

Good condition with potential for damage

MANAGEMENT PLANNER'S RECOMMENDED RESPONSE ACTION:

Continue O & M

Take steps to reduce potential for disturbance

INSPECTOR'S COMMENTS:

Intact Continue O & M

BUILDING INSPECTION REPORT AND ASBESTOS MANAGEMENT PLAN

BUILDING NUMBER : G
ASBESTOS-CONTAINING MATERIAL DESCRIPTION : 9"X 9" ^{brown} Floor Tile
HOMOGENEOUS AREA # : 1
FUNCTIONAL AREA : Kitchen

TYPE OF MATERIAL : SURFACING _____ THERMAL SYSTEM INSULATION _____ MISC. ☒

APPROXIMATE QUANTITY : 900 SF

FRIABILITY : NON-FRIABLE ☒
MODERATELY FRIABLE _____
FRIABLE _____

MATERIAL LOCATIONS : Bldg G Kitchen

SAMPLE # SAMPLE LOCATION ANALYSIS RESULTS

CONDITION OF ACM OR ACE:

Percent Distributed damage:
Type of damage:
Overall rating:

None
No Damage
Good Condition (3)

POTENTIAL FOR DISTURBANCE OF ACM OR ACE:

Potential for contact:
Influence of vibration:
Potential for air erosion:

LOW			HIGH	
1	2	3	4	5
—	—	✓	—	—
—	✓	—	—	—
—	✓	—	—	—

IS MATERIAL ACCESSIBLE?:

Yes

IS MATERIAL LOCATED IN AN AIR PLENUM?:

No

MANAGEMENT PLANNER'S HAZARD ASSESSMENT:

Good Condition with potential for damage

MANAGEMENT PLANNER'S RECOMMENDED RESPONSE ACTION: Continue O & M

INSPECTOR'S COMMENTS: Intact Continue O & M

~~12/11/11~~

BUILDING INSPECTION REPORT AND ASBESTOS MANAGEMENT PLAN

BUILDING NUMBER : G

ASBESTOS-CONTAINING MATERIAL DESCRIPTION : 1'x1' Fissured CT mastic

HOMOGENEOUS AREA # : 19

FUNCTIONAL AREA : Auditorium

TYPE OF MATERIAL : SURFACING _____ THERMAL SYSTEM INSULATION _____ MISC. ☒

APPROXIMATE QUANTITY : 3000 Sq ft

FRIABILITY : NON-FRIABLE ~~✓~~ ✓
MODERATELY FRIABLE ~~✓~~
FRIABLE _____

MATERIAL LOCATIONS : Bldg G Auditorium

SAMPLE # SAMPLE LOCATION ANALYSIS RESULTS

CONDITION OF ACM OR ACE:

Percent Distributed damage:

Type of damage:

Overall rating:

5%
missing Tiles
Faint (A)

POTENTIAL FOR DISTURBANCE OF ACM OR ACE:

Potential for contact:

Influence of vibration:

Potential for air erosion:

LOW					HIGH
1	2	3	4	5	
—	✓	—	—	—	—
—	—	✓	—	—	—
—	✓	—	—	—	—

IS MATERIAL ACCESSIBLE?:

Yes
No

IS MATERIAL LOCATED IN AN AIR PLENUM?:

MANAGEMENT PLANNER'S HAZARD ASSESSMENT:

Damaged condition with low potential for significant dam.

MANAGEMENT PLANNER'S RECOMMENDED RESPONSE ACTION: Repair or replace missing tiles

INSPECTOR'S COMMENTS:

Repair

Initial in Present Mgmt Plan but it appears that these Transits
will be done in the future. A.M.

BUILDING INSPECTION REPORT AND ASBESTOS MANAGEMENT PLAN

FUNCTIONAL AREA : Classroom

ANALYSIS RESULTS

Continue O & M

BUILDING INSPECTION REPORT AND ASBESTOS MANAGEMENT PLAN

BUILDING NUMBER : H
 ASBESTOS-CONTAINING MATERIAL DESCRIPTION : 9" x 9" Gold Floor Tile
 HOMOGENEOUS AREA # :
 FUNCTIONAL AREA : Classrooms

TYPE OF MATERIAL : SURFACING _____ THERMAL SYSTEM INSULATION _____ MISC. ✓

APPROXIMATE QUANTITY : 4000 SF

FRIABILITY : NON-FRIABLE ✓
 MODERATELY FRIABLE _____
 FRIABLE _____

MATERIAL LOCATIONS : Rooms 1-4

<u>SAMPLE #</u>	<u>SAMPLE LOCATION</u>	<u>ANALYSIS RESULTS</u>
-----------------	------------------------	-------------------------

CONDITION OF ACM OR ACE:

Percent Distributed damage: None
 Type of damage: No Damage
 Overall rating: Good Condition (3)

POTENTIAL FOR DISTURBANCE OF ACM OR ACE:

	<u>LOW</u>					<u>HIGH</u>
	<u>1</u>	<u>2</u>	<u>3</u>	<u>4</u>	<u>5</u>	
Potential for contact:	—	—	—	<u>✓</u>	—	
Influence of vibration:	—	<u>✓</u>	—	—	—	
Potential for air erosion:	—	<u>✓</u>	—	—	—	

IS MATERIAL ACCESSIBLE?:

Yes

IS MATERIAL LOCATED IN AN AIR PLENUM?:

No

MANAGEMENT PLANNER'S HAZARD ASSESSMENT:

Good condition with potential for damage

MANAGEMENT PLANNER'S RECOMMENDED RESPONSE ACTION:

Continue O & M

INSPECTOR'S COMMENTS:

Intact continue O & M

APPENDIX B

United States Department of Commerce
National Institute of Standards and Technology

NVLAP

Certificate of Accreditation

CONCORD ANALYSIS, INC.
CHATSWORTH, GA

is recognized under the National Voluntary Laboratory Accreditation Program
for satisfactory compliance with criteria established in Title 15, Part 7 Code of Federal Regulations.
Accreditation is awarded for specific services, listed on the Scope of Accreditation, for:

BULK ASBESTOS FIBER ANALYSIS

January 1, 1993
Effective until



Albert R. Holman
For the National Institute of Standards and Technology

EPA Accredited AHERA Approved

A OCCUTRAIN

OCCUPATIONAL TRAINING INSTITUTE, INC.

BE IT KNOWN TO ALL THAT
WILFRED NWA8B080
SS# 444-74-1952

HAS SUCCESSFULLY COMPLETED A 1 / DAY COURSE AND, AFTER PASSING
THE REQUIRED EXAMINATION, IS AWARDED THIS CERTIFICATE

ON

MARCH 5, 1993

FOR

INSPECTING BUILDING

FOR ASBESTOS


Annual Refresher Course

IBFA-R-212-93

ACCREDITATION NO.

MARCH 5, 1994

EXPIRATION DATE

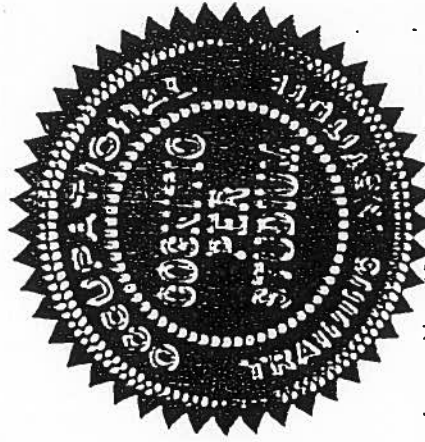

Charles E. Goldshall

EXECUTIVE DIRECTOR

D. Wade Egan

EXAM ADMINISTRATOR

For purposes of accreditation required under section 206 of the Toxic Substances Control Act (TSCA)
Occupational Training Institute, Inc. - (Occutrain) - 200 Baker Street, Ste. 1 205 Costa Mesa, CA 92626-Phil 714 556-7844

A.H.E.R.A. ACCREDITED



NATIONAL ENVIRONMENTAL
TRAINING FOR HAZARDOUS MATERIALS AND ASBESTOS

1019 W. Manchester Blvd., Inglewood, CA 90301
In Calif. (800) 544-8323 • (213) 645-4516 • Fax (213) 645-0148

00438

CERTIFICATE NUMBER

This is to certify that

WILLIE NWAGBOSO


444-74-1952

HAS SUCCESSFULLY COMPLETED THE COURSE AND PASSED THE
EXAMINATION FOR MANAGEMENT PLANNER AS PRESCRIBED BY
THE ENVIRONMENTAL PROTECTION AGENCY FOR PRACTICES
AND PROCEDURES IN ASBESTOS ABATEMENT.

AUGUST 21, 1992
EXAMINATION DATE

AUGUST 20, 1993
EXPIRATION DATE

AUGUST 20-21, 1992
TRAINING DATE



James McFarland
Program Director
NATIONAL ENVIRONMENTAL

APPENDIX C

PRIMARY LABORATORY

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-012

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Webster


RECEIVE DATE: 7-31-92

REPORT DATE : 8-05-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS		OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS	
W.01.01		CHRYSTILE	4.0%	Cellulose	Calcite
		AMOSITE	Not-Det.		Quartz
L1820731	Floor Tile	OTHER:	Not-Det.		Glass
-01		TYPE:			Lizardite
COLOR:	Brown	TOTAL ABS.:	4.0%	NONASB	1.0% Binder
W.01.01		CHRYSTILE	Not-Det.	Cellulose	Calcite
		AMOSITE	Not-Det.		Quartz
L1820731	Mastic	OTHER:	Not-Det.		Glass
-01A		TYPE:			Binder
COLOR:	Black	TOTAL ABS.:	Not-Det.	NONASB	2.0% Accessory
W.02.01		CHRYSTILE	5.0%	Cellulose	Calcite
		AMOSITE	Not-Det.		Quartz
L1820731	Floor Tile	OTHER:	Not-Det.		Glass
-02		TYPE:			Lizardite
COLOR:	Brown	TOTAL ABS.:	5.0%	NONASB	1.0% Binder
W.02.01		CHRYSTILE	2.0%	Cellulose	Calcite
		AMOSITE	Not-Det.		Quartz
L1820731	Mastic	OTHER:	Not-Det.		Glass
-02A		TYPE:			Binder
COLOR:	Black	TOTAL ABS.:	2.0%	NONASB	2.0% Accessory

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A. "Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-0128

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Webster


RECEIVE DATE: 7-31-92

REPORT DATE : 8-05-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS
W.03.01		CHRYBOTILE 5.0%	Cellulose Calcite
L1820731	Floor Tile	AMOSITE Not-Det.	Quartz
-03		OTHER: Not-Det.	Glass
COLOR: White		TYPE:	Lizardite
		TOTAL ABS.: 5.0%	NONASB 1.0% Binder
W.03.01		CHRYBOTILE Not-Det.	Cellulose Calcite
L1820731	Mastic	AMOSITE Not-Det.	Quartz
-03A		OTHER: Not-Det.	Glass
COLOR: Orange		TYPE:	Binder
		TOTAL ABS.: Not-Det.	NONASB 1.0% Accessory
W.04.01		CHRYBOTILE 5.0%	Cellulose Calcite
L1820731	Floor Tile	AMOSITE Not-Det.	Quartz
-04		OTHER: Not-Det.	Glass
COLOR: Tan		TYPE:	Feldspar
		TOTAL ABS.: 5.0%	NONASB 1.0% Binder
W.04.01		CHRYBOTILE 3.0%	Cellulose Calcite
L1820731	Mastic	AMOSITE Not-Det.	Quartz
-04A		OTHER: Not-Det.	Glass
COLOR: Black		TYPE:	Binder
		TOTAL ABS.: 3.0%	NONASB 1.0% Accessory

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A.
"Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately

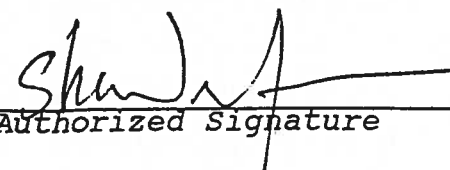
Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-0121

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Webster


RECEIVE DATE: 7-31-92

REPORT DATE : 8-05-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS
W.05.01		CHRYSTILE 7.0%	Cellulose Calcite
		AMOSITE Not-Det.	Quartz
L1820731	Floor Tile	OTHER: Not-Det.	Glass
-05		TYPE:	Binder
COLOR: Tan		TOTAL ABS.: 7.0%	NONASB 1.0% Accessory
W.05.01		CHRYSTILE 10.0%	Cellulose Calcite
		AMOSITE Not-Det.	Quartz
L1820731	Mastic	OTHER: Not-Det.	Glass
-05A		TYPE:	Lizardite
COLOR: Black		TOTAL ABS.: 10.0%	NONASB 1.0% Binder
W.06.01		CHRYSTILE 3.0%	Cellulose Calcite
		AMOSITE Not-Det.	Quartz
L1820731	Floor Tile	OTHER: Not-Det.	Glass
-06		TYPE:	Lizardite
COLOR: Brown		TOTAL ABS.: 3.0%	NONASB 1.0% Binder
W.06.01		CHRYSTILE 5.0%	Cellulose Calcite
		AMOSITE Not-Det.	Quartz
L1820731	Mastic	OTHER: Not-Det.	Glass
-06A		TYPE:	Binder
COLOR: Black		TOTAL ABS.: 5.0%	NONASB 2.0% Accessory

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A.
"Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-0128

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Webster

RECEIVE DATE: 7-31-92

REPORT DATE : 8-05-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS
W.07.01		CHRYSTILE 5.0%	Cellulose Calcite
		AMOSITE Not-Det.	Quartz
L1820731 Floor Tile		OTHER: Not-Det.	Glass
-07		TYPE:	Binder
COLOR: Gray		TOTAL ABS.: 5.0%	NONASB 1.0% Accessory
W.07.01		CHRYSTILE 10.0%	Cellulose Calcite
		AMOSITE Not-Det.	Quartz
L1820731 Mastic		OTHER: Not-Det.	Glass
-07A		TYPE:	Binder
COLOR: Black		TOTAL ABS.: 10.0%	NONASB 2.0% Accessory
W.08.01		CHRYSTILE 5.0%	Cellulose Calcite
		AMOSITE Not-Det.	Quartz
L1820731 Floor Tile		OTHER: Not-Det.	Glass
-08		TYPE:	Lizardite
COLOR: Gray		TOTAL ABS.: 5.0%	NONASB 1.0% Binder
W.08.01		CHRYSTILE 10.0%	Cellulose Calcite
		AMOSITE Not-Det.	Quartz
L1820731 Mastic		OTHER: Not-Det.	Glass
-08A		TYPE:	Binder
COLOR: Black		TOTAL ABS.: 10.0%	NONASB 2.0% Accessory

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A.
"Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-0121

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Webster


RECEIVE DATE: 7-31-92

REPORT DATE : 8-05-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS	
W.09.01		CHRYSTILE Trace	Cellulose	Calcite
L1820731	Floor Tile	AMOSITE Not-Det.		Quartz
-09		OTHER: Not-Det.		Glass
COLOR: Tan		TYPE:		Binder
		TOTAL ABS.: Trace	NONASB 1.0%	Accessory
W.09.01		CHRYSTILE 5.0%	Cellulose	Calcite
L1820731	Mastic	AMOSITE Not-Det.		Quartz
-09A		OTHER: Not-Det.		Glass
COLOR: Black, Orange		TYPE:		Binder
		TOTAL ABS.: 5.0%	NONASB 2.0%	Accessory
W.10.01		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731	Roof Material	AMOSITE Not-Det.	Gypsum	Quartz
-10		OTHER: Not-Det.		Glass
COLOR: White		TYPE:		Binder
		TOTAL ABS.: Not-Det.	NONASB 50.0%	Accessory
W.10.02		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.	Glass	Quartz
-11		OTHER: Not-Det.	Gypsum	Glass
COLOR: White		TYPE:		Biotite
		TOTAL ABS.: Not-Det.	NONASB 70.0%	Binder

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A. "Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-012

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Webster

RECEIVE DATE: 7-31-92

REPORT DATE : 8-05-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS	
W.10.03		CHRYBOTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.	Gypsum	Quartz
-12		OTHER: Not-Det.		Glass
		TYPE:		Binder
COLOR: White		TOTAL ABS.:Not-Det.	NONASB 60.0%	Accessory
W.10.04		CHRYBOTILE Trace	Cellulose	Calcite
L1820731		AMOSITE Not-Det.	Gypsum	Quartz
-13		OTHER: Not-Det.		Glass
		TYPE:		Binder
COLOR: White, Beige		TOTAL ABS.:Trace	NONASB 50.0%	Accessory
W.10.05		CHRYBOTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.	Gypsum	Quartz
-14		OTHER: Not-Det.		Glass
		TYPE:		Binder
COLOR: White		TOTAL ABS.:Not-Det.	NONASB 80.0%	Accessory
W.11.01		CHRYBOTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.	Glass	Quartz
-15		OTHER: Not-Det.	Gypsum	Glass
		TYPE:		Binder
COLOR: White		TOTAL ABS.:Not-Det.	NONASB 90.0%	Accessory

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A. "Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-012

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Webster


RECEIVE DATE: 7-31-92

REPORT DATE : 8-05-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS
W.11.02		CHRYSTILE Not-Det.	Cellulose Calcite
L1820731		AMOSITE Not-Det.	Gypsum Quartz
-16		OTHER: Not-Det.	Glass
COLOR: White, Beige		TYPE:	Binder
		TOTAL ABS.: Not-Det.	NONASB 90.0% Accessory
W.11.03		CHRYSTILE Not-Det.	Cellulose Calcite
L1820731		AMOSITE Not-Det.	Mineral Wool Quartz
-17		OTHER: Not-Det.	Gypsum Glass
COLOR: White		TYPE:	Binder
		TOTAL ABS.: Not-Det.	NONASB 90.0% Accessory
W.11.04		CHRYSTILE Not-Det.	Cellulose Calcite
L1820731		AMOSITE Not-Det.	Gypsum Quartz
-18		OTHER: Not-Det.	Glass
COLOR: White		TYPE:	Binder
		TOTAL ABS.: Not-Det.	NONASB 90.0% Accessory
W.11.05		CHRYSTILE Not-Det.	Cellulose Calcite
L1820731		AMOSITE Not-Det.	Gypsum Quartz
-19		OTHER: Not-Det.	Glass
COLOR: White		TYPE:	Binder
		TOTAL ABS.: Not-Det.	NONASB 70.0% Accessory

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A. "Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-012

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Webster


RECEIVE DATE: 7-31-92

REPORT DATE : 8-05-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS	
W.12.01		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.		Glass
-20		OTHER: Not-Det.		Binder
COLOR: White, Brown		TYPE:		Accessory
		TOTAL ABS.: Not-Det.	NONASB 95.0%	
W.12.02		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.		Quartz
-21		OTHER: Not-Det.		Binder
COLOR: White, Brown		TYPE:		Accessory
		TOTAL ABS.: Not-Det.	NONASB 95.0%	
W.12.03		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.		Glass
-22		OTHER: Not-Det.		Binder
COLOR: White, Brown		TYPE:		Accessory
		TOTAL ABS.: Not-Det.	NONASB 90.0%	
W.13.01		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.	Mineral Wool	Quartz
-23		OTHER: Not-Det.	Fiber	Glass
COLOR: White		TYPE:		Binder
		TOTAL ABS.: Not-Det.	NONASB 90.0%	Accessory

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A.
"Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-012

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Webster


RECEIVE DATE: 7-31-92

REPORT DATE : 8-05-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS
W.13.02		CHRYSTILE Not-Det.	Cellulose Calcite
		AMOSITE Not-Det.	Mineral Wool Quartz
L1820731		OTHER: Not-Det.	Fiber Glass
-24		TYPE:	Binder
COLOR: White		TOTAL ABS.:Not-Det.	NONASB 90.0% Accessory
W.13.03		CHRYSTILE Not-Det.	Cellulose Calcite
		AMOSITE Not-Det.	Mineral Wool Quartz
L1820731		OTHER: Not-Det.	Fiber Glass
-25		TYPE:	Binder
COLOR: White		TOTAL ABS.:Not-Det.	NONASB 90.0% Accessory
W.14.01		CHRYSTILE Not-Det.	Cellulose Calcite
		AMOSITE Not-Det.	Mineral Wool Quartz
L1820731		OTHER: Not-Det.	Glass
-26		TYPE:	Binder
COLOR: White, Brown		TOTAL ABS.:Not-Det.	NONASB 30.0% Accessory
W.14.02		CHRYSTILE Not-Det.	Cellulose Calcite
		AMOSITE Not-Det.	Mineral Wool Quartz
L1820731		OTHER: Not-Det.	Glass
-27		TYPE:	Binder
COLOR: White, Brown		TOTAL ABS.:Not-Det.	NONASB 15.0% Accessory

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A. "Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-012

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Webster


RECEIVE DATE: 7-31-92

REPORT DATE : 8-05-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS
W.14.03		CHRYSTILE Not-Det.	Cellulose Calcite
		AMOSITE Not-Det.	Mineral Wool Quartz
L1820731		OTHER: Not-Det.	Glass
-28		TYPE:	Binder
COLOR: White, Brown		TOTAL ABS.: Not-Det.	NONASB 15.0% Accessory
W.15.01		CHRYSTILE Not-Det.	Cellulose Calcite
		AMOSITE Not-Det.	Quartz
L1820731		OTHER: Not-Det.	Glass
-29		TYPE:	Binder
COLOR: White, Brown		TOTAL ABS.: Not-Det.	NONASB 95.0% Accessory
W.15.02		CHRYSTILE Not-Det.	Cellulose Glass
		AMOSITE Not-Det.	Binder
L1820731		OTHER: Not-Det.	Accessory
-30		TYPE:	
COLOR: White, Brown		TOTAL ABS.: Not-Det.	NONASB 95.0%
W.15.03		CHRYSTILE Not-Det.	Cellulose Calcite
		AMOSITE Not-Det.	Glass
L1820731		OTHER: Not-Det.	Binder
-31		TYPE:	Accessory
COLOR: White, Brown		TOTAL ABS.: Not-Det.	NONASB 95.0%

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A.
"Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyze separately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-0128

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Webster

RECEIVE DATE: 7-31-92

REPORT DATE : 8-05-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS
W.16.01		CHRYSTOTILE Not-Det.	Cellulose Glass
		AMOSITE Not-Det.	Binder
L1820731		OTHER: Not-Det.	Accessory
-32		TYPE:	
COLOR: Brown		TOTAL ABS.:Not-Det.	NONASB 10.0%
W.16.02		CHRYSTOTILE Not-Det.	Cellulose Calcite
		AMOSITE Not-Det.	Quartz
L1820731		OTHER: Not-Det.	Glass
-33		TYPE:	Vermiculite
COLOR: Brown		TOTAL ABS.:Not-Det.	NONASB 10.0% Feldspar
W.16.03		CHRYSTOTILE Not-Det.	Cellulose Glass
		AMOSITE Not-Det.	Binder
L1820731		OTHER: Not-Det.	Accessory
-34		TYPE:	
COLOR: Brown		TOTAL ABS.:Not-Det.	NONASB 30.0%
W.17.01		CHRYSTOTILE Not-Det.	Cellulose Calcite
		AMOSITE Not-Det.	Glass
L1820731		OTHER: Not-Det.	Binder
-35		TYPE:	Accessory
COLOR: White, Brown		TOTAL ABS.:Not-Det.	NONASB 35.0%

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A.
"Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-012

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Webster


RECEIVE DATE: 7-31-92

REPORT DATE : 8-05-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS
W.17.02		CHRYSTILE Not-Det.	Cellulose Calcite
L1820731		AMOSITE Not-Det.	Glass
-36		OTHER: Not-Det.	Binder
COLOR: White, Brown		TYPE:	Accessory
		TOTAL ABS.: Not-Det.	NONASB 95.0%
W.17.03		CHRYSTILE Not-Det.	Cellulose Calcite
L1820731		AMOSITE Not-Det.	Glass
-37		OTHER: Not-Det.	Binder
COLOR: White, Brown		TYPE:	Accessory
		TOTAL ABS.: Not-Det.	NONASB 90.0%
W.18.01		CHRYSTILE Not-Det.	Cellulose Calcite
L1820731		AMOSITE Not-Det.	Mineral Wool Perlite
-38		OTHER: Not-Det.	Binder
COLOR: White, Gray		TYPE:	Accessory
		TOTAL ABS.: Not-Det.	NONASB 60.0%
W.18.02		CHRYSTILE Not-Det.	Cellulose Calcite
L1820731		AMOSITE Not-Det.	Mineral Wool Glass
-39		OTHER: Not-Det.	Binder
COLOR: White, Gray		TYPE:	Accessory
		TOTAL ABS.: Not-Det.	NONASB 90.0%

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A. "Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-0121

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Wesbter


RECEIVE DATE: 7-31-92

REPORT DATE : 8-06-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS	
W.18.03		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.	Mineral Wool	Perlite
-40		OTHER: Not-Det.		Binder
COLOR: White, Gray		TYPE:		Accessory
		TOTAL ABS.: Not-Det.	NONASB 60.0%	
W.19.01		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.	Gypsum	Quartz
-41		OTHER: Not-Det.		Glass
COLOR: White, Brown		TYPE:		Vermiculite
		TOTAL ABS.: Not-Det.	NONASB 10.0%	Binder
W.19.02		CHRYSTILE 3.0%	Cellulose	Calcite
L1820731		AMOSITE Not-Det.	Mineral Wool	Glass
-42		OTHER: Not-Det.		Binder
COLOR: Brown		TYPE:		Accessory
		TOTAL ABS.: 3.0%	NONASB 5.0%	
W.19.03		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.	Mineral Wool	Glass
-43		OTHER: Not-Det.		Binder
COLOR: White, Brown		TYPE:		Accessory
		TOTAL ABS.: Not-Det.	NONASB 15.0%	

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A. "Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyze seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-0128

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Wesbter


RECEIVE DATE: 7-31-92

REPORT DATE : 8-06-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS	
W.20.01		CHRYBOTILE Not-Det.	Cellulose	Calcite
		AMOSITE Not-Det.	Gypsum	Quartz
L1820731		OTHER: Not-Det.		Glass
-44		TYPE:		Vermiculite
COLOR: White		TOTAL ABS.:Not-Det.	NONASB 70.0%	Feldspar
W.20.02		CHRYBOTILE Not-Det.	Cellulose	Calcite
		AMOSITE Not-Det.	Mineral Wool	Quartz
L1820731		OTHER: Not-Det.	Gypsum	Glass
-45		TYPE:		Vermiculite
COLOR: White		TOTAL ABS.:Not-Det.	NONASB 60.0%	Binder
W.20.03		CHRYBOTILE Not-Det.	Cellulose	Calcite
		AMOSITE Not-Det.	Gypsum	Quartz
L1820731		OTHER: Not-Det.		Glass
-46		TYPE:		Feldspar
COLOR: White		TOTAL ABS.:Not-Det.	NONASB 60.0%	Binder
W.20.04		CHRYBOTILE Not-Det.	Cellulose	Calcite
		AMOSITE Not-Det.	Gypsum	Quartz
L1820731		OTHER: Not-Det.	Fiber	Glass
-47		TYPE:		Vermiculite
COLOR: Beige		TOTAL ABS.:Not-Det.	NONASB 60.0%	Feldspar

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A. "Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-012

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Wesbter


RECEIVE DATE: 7-31-92

REPORT DATE : 8-06-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS	
W.20.05		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.	Gypsum	Quartz
-48		OTHER: Not-Det.		Glass
		TYPE:		Feldspar
COLOR: Beige		TOTAL ABS.:Not-Det.	NONASB 50.0%	Binder
W.20.06		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.		Quartz
-49		OTHER: Not-Det.		Glass
		TYPE:		Binder
COLOR: White, Gray		TOTAL ABS.:Not-Det.	NONASB 2.0%	Accessory
W.20.07		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.	Gypsum	Quartz
-50		OTHER: Not-Det.		Glass
		TYPE:		Biotite
COLOR: Beige		TOTAL ABS.:Not-Det.	NONASB 50.0%	Binder
W.21.01		CHRYSTILE Trace	Cellulose	Calcite
L1820731		AMOSITE Not-Det.		Quartz
-51		OTHER: Not-Det.		Glass
		TYPE:		Biotite
COLOR: Gray		TOTAL ABS.:Trace	NONASB 1.0%	Feldspar

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A. "Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-012

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Wesbter

RECEIVE DATE: 7-31-92

REPORT DATE : 8-06-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS	
W.21.02		CHRYSTILE Not-Det.	Cellulose	Calcite
		AMOSITE Not-Det.	Gypsum	Quartz
L1820731		OTHER: Not-Det.		Glass
-52		TYPE:		Biotite
COLOR: Gray		TOTAL ABS.:Not-Det.	NONASB 50.0%	Binder
W.21.03		CHRYSTILE Not-Det.	Cellulose	Calcite
		AMOSITE Not-Det.		Quartz
L1820731		OTHER: Not-Det.		Glass
-53		TYPE:		Biotite
COLOR: Gray		TOTAL ABS.:Not-Det.	NONASB 1.0%	Feldspar
W.21.04		CHRYSTILE Not-Det.	Cellulose	Quartz
		AMOSITE Not-Det.	Gypsum	Glass
L1820731		OTHER: Not-Det.		Biotite
-54		TYPE:		Feldspar
COLOR: White		TOTAL ABS.:Not-Det.	NONASB 50.0%	Binder
W.21.05		CHRYSTILE Not-Det.	Cellulose	Quartz
		AMOSITE Not-Det.	Gypsum	Glass
L1820731		OTHER: Not-Det.		Biotite
-55		TYPE:		Feldspar
COLOR: Beige		TOTAL ABS.:Not-Det.	NONASB 50.0%	Binder

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A. "Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-012

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Wesbter

RECEIVE DATE: 7-31-92

REPORT DATE : 8-06-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS
W.21.06		CHRYSTOTILE Not-Det.	Cellulose Calcite
L1820731		AMOSITE Not-Det.	Gypsum Quartz
-56		OTHER: Not-Det.	Glass
COLOR: Beige		TYPE:	Biotite
		TOTAL ABS.:Not-Det.	NONASB 50.0% Binder
W.21.07		CHRYSTOTILE Not-Det.	Cellulose Quartz
L1820731		AMOSITE Not-Det.	Gypsum Glass
-57		OTHER: Not-Det.	Biotite
COLOR: Beige		TYPE:	Feldspar
		TOTAL ABS.:Not-Det.	NONASB 50.0% Binder
W.22.01		CHRYSTOTILE Not-Det.	Cellulose Quartz
L1820731		AMOSITE Not-Det.	Gypsum Glass
-58		OTHER: Not-Det.	Biotite
COLOR: Beige		TYPE:	Feldspar
		TOTAL ABS.:Not-Det.	NONASB 50.0% Binder
W.22.02		CHRYSTOTILE Not-Det.	Cellulose Quartz
L1820731		AMOSITE Not-Det.	Gypsum Glass
-59		OTHER: Not-Det.	Biotite
COLOR: Beige		TYPE:	Feldspar
		TOTAL ABS.:Not-Det.	NONASB 50.0% Binder

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A. "Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyze seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-0112

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Wesbter


RECEIVE DATE: 7-31-92

REPORT DATE : 8-06-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS	
W.22.03		CHRYSTILE Not-Det.	Cellulose	Quartz
		AMOSITE Not-Det.	Gypsum	Glass
L1820731		OTHER: Not-Det.		Biotite
-60		TYPE:		Feldspar
COLOR: Beige		TOTAL ABS.:Not-Det.	NONASB 40.0%	Binder
W.22.04		CHRYSTILE Not-Det.	Cellulose	Quartz
		AMOSITE Not-Det.	Gypsum	Glass
L1820731		OTHER: Not-Det.		Biotite
-61		TYPE:		Feldspar
COLOR: Beige		TOTAL ABS.:Not-Det.	NONASB 40.0%	Binder
W.22.05		CHRYSTILE Not-Det.	Cellulose	Calcite
		AMOSITE Not-Det.	Gypsum	Quartz
L1820731		OTHER: Not-Det.		Perlite
-62		TYPE:		Biotite
COLOR: Beige		TOTAL ABS.:Not-Det.	NONASB 30.0%	Feldspar
W.23.01		CHRYSTILE Not-Det.	Cellulose	Calcite
		AMOSITE Not-Det.	Gypsum	Quartz
L1820731		OTHER: Not-Det.		Glass
-63		TYPE:		Biotite
COLOR: Beige		TOTAL ABS.:Not-Det.	NONASB 30.0%	Feldspar

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A.
"Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-0128

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Wesbter


RECEIVE DATE: 7-31-92

REPORT DATE : 8-06-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS	
W.23.02		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.	Gypsum	Quartz
-64		OTHER: Not-Det.		Glass
COLOR: White, Beige		TYPE:		Biotite
		TOTAL ABS.: Not-Det.	NONASB 30.0%	Feldspar
W.23.03		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.	Gypsum	Quartz
-65		OTHER: Not-Det.		Glass
COLOR: Beige		TYPE:		Biotite
		TOTAL ABS.: Not-Det.	NONASB 50.0%	Feldspar
W.23.04		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.	Gypsum	Quartz
-66		OTHER: Not-Det.		Glass
COLOR: Beige		TYPE:		Biotite
		TOTAL ABS.: Not-Det.	NONASB 40.0%	Feldspar
W.23.05		CHRYSTILE Not-Det.	Cellulose	Quartz
L1820731		AMOSITE Not-Det.	Gypsum	Glass
-67		OTHER: Not-Det.	Fiber	Biotite
COLOR: Beige		TYPE:		Feldspar
		TOTAL ABS.: Not-Det.	NONASB 50.0%	Binder

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A.
"Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-012

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Wesbter


RECEIVE DATE: 7-31-92

REPORT DATE : 8-06-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS	
W.24.01		CHRYBOTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.		Quartz
-68		OTHER: Not-Det.		Glass
COLOR: White, Beige		TYPE:		Biotite
		TOTAL ABS.: Not-Det.	NONASB 3.0%	Binder
W.24.02		CHRYBOTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.		Quartz
-69		OTHER: Not-Det.		Glass
COLOR: Gray		TYPE:		Biotite
		TOTAL ABS.: Not-Det.	NONASB 2.0%	Binder
W.24.03		CHRYBOTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.		Quartz
-70		OTHER: Not-Det.		Glass
COLOR: White, Gray		TYPE:		Biotite
		TOTAL ABS.: Not-Det.	NONASB 2.0%	Feldspar
W.24.04		CHRYBOTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.		Quartz
-71		OTHER: Not-Det.		Glass
COLOR: Gray		TYPE:		Biotite
		TOTAL ABS.: Not-Det.	NONASB 2.0%	Feldspar

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A. "Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-012

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Wesbter


RECEIVE DATE: 7-31-92

REPORT DATE : 8-06-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS
W.24.05		CHRYSTILE Not-Det.	Cellulose Calcite
L1820731		AMOSITE Not-Det.	Quartz
-72		OTHER: Not-Det.	Glass
COLOR: Beige, Gray		TYPE:	Biotite
		TOTAL ABS.: Not-Det.	NONASB 1.0% Binder
W.24.06		CHRYSTILE Not-Det.	Cellulose Calcite
L1820731		AMOSITE Not-Det.	Quartz
-73		OTHER: Not-Det.	Glass
COLOR: Gray		TYPE:	Binder
		TOTAL ABS.: Not-Det.	NONASB 1.0% Accessory
W.24.07		CHRYSTILE Not-Det.	Cellulose Calcite
L1820731		AMOSITE Not-Det.	Quartz
-74		OTHER: Not-Det.	Glass
COLOR: Gray		TYPE:	Binder
		TOTAL ABS.: Not-Det.	NONASB 1.0% Accessory
W.25.01		CHRYSTILE Not-Det.	Cellulose Calcite
L1820731		AMOSITE Not-Det.	Quartz
-75		OTHER: Not-Det.	Glass
COLOR: Gray		TYPE:	Binder
		TOTAL ABS.: Not-Det.	NONASB 1.0% Accessory

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A.
"Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-012

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Wesbter

RECEIVE DATE: 7-31-92

REPORT DATE : 8-06-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS	
W.25.02		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.		Quartz
-76		OTHER: Not-Det.		Glass
COLOR: Gray		TYPE:		Binder
		TOTAL ABS.:Not-Det.	NONASB 1.0%	Accessory
W.25.03		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.		Quartz
-77		OTHER: Not-Det.		Glass
COLOR: Gray		TYPE:		Binder
		TOTAL ABS.:Not-Det.	NONASB 1.0%	Accessory
W.25.04		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.		Quartz
-78		OTHER: Not-Det.		Glass
COLOR: Gray		TYPE:		Biotite
		TOTAL ABS.:Not-Det.	NONASB 1.0%	Binder
W.25.05		CHRYSTILE Not-Det.	Cellulose	Calcite
L1820731		AMOSITE Not-Det.		Quartz
-79		OTHER: Not-Det.		Glass
COLOR: Gray, Brown		TYPE:		Biotite
		TOTAL ABS.:Not-Det.	NONASB 1.0%	Binder

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A.
"Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-0121

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: *Wesbter*


RECEIVE DATE: 7-31-92

REPORT DATE : 8-06-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS	OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS	
W.28.01		CHRYBOTILE 10.0%	Cellulose	Calcite
		AMOSITE Not-Det.		Quartz
L1820731		OTHER: Not-Det.		Glass
-80		TYPE:		Binder
COLOR: Black, Red		TOTAL ABS.: 10.0%	NONASB 2.0%	Accessory
W.28.02		CHRYBOTILE 15.0%	Cellulose	Calcite
		AMOSITE Not-Det.		Quartz
L1820731		OTHER: Not-Det.		Glass
-81		TYPE:		Binder
COLOR: Black, Red		TOTAL ABS.: 15.0%	NONASB 1.0%	Accessory
W.28.03		CHRYBOTILE 15.0%	Cellulose	Calcite
		AMOSITE Not-Det.		Quartz
L1820731		OTHER: Not-Det.		Glass
-82		TYPE:		Binder
COLOR: Black, Red		TOTAL ABS.: 15.0%	NONASB 2.0%	Accessory
W.29.01		CHRYBOTILE Not-Det.	Cellulose	Calcite
		AMOSITE Not-Det.	Mineral Wool	Glass
L1820731		OTHER: Not-Det.		Binder
-83		TYPE:		Accessory
COLOR: Beige, Red		TOTAL ABS.: Not-Det.	NONASB 50.0%	

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A.
"Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature

CONCORD ANALYSIS, INC.

9960 Canoga Ave., Suite D8, Chatsworth, Ca 91311

Tel: (818) 407-0121

BULK SAMPLE ANALYTICAL RESULT

Cape Environmental Management, Inc.
20280 S. Vermont Ave., Suite 225
Torrance, Ca 90502

JOB SITE: Wesbter


RECEIVE DATE: 7-31-92


REPORT DATE : 8-06-92

FIELD # LAB #	LOCATION/ MATERIAL	TYPE & PERCENT OF ASBESTOS		OTHER MATERIAL IN SAMPLE FIBROUS(%) / NONFIBROUS	
W.30.01		CHRYSTILE	4.0%	Cellulose	Calcite
L1820731		AMOSITE	Not-Det.		Quartz
-84		OTHER:	Not-Det.		Glass
		TYPE:			Binder
COLOR: Gray, Blue		TOTAL ABS.:	4.0%	NONASB	2.0% Accessory
W.30.02		CHRYSTILE	7.0%	Cellulose	Calcite
L1820731		AMOSITE	Not-Det.		Quartz
-85		OTHER:	Not-Det.		Glass
		TYPE:			Binder
COLOR: Gray, Brown		TOTAL ABS.:	7.0%	NONASB	3.0% Accessory
W.30.03		CHRYSTILE	7.0%	Cellulose	Calcite
L1820731		AMOSITE	Not-Det.		Quartz
-86		OTHER:	Not-Det.		Glass
		TYPE:			Binder
COLOR: Gray, Blue		TOTAL ABS.:	7.0%	NONASB	2.0% Accessory

Remark:

- (1) Analytical method: 40 CFR Part 763, subpart F, Appendix A.
"Interim Method for the Determination of Asbestos in Bulk Insulation Samples".
- (2) Test report pertains only to the sample and sampling data submitted by the client.
- (3) If no asbestos detected in Floor Tile by this method, suggest analyzing by TEM.
- (4) If sample is inhomogeneous, subsamples will be taken and analyse seperately


Authorized Signature



82 W. Sierra Madre Blvd
Sierra Madre, California
91024-2434

818-355-4711

FAX: 818-355-4497

Hygeia Environmental Laboratories Inc.

Atlanta
Boston
Los Angeles
New York

Bulk Sample Analysis Summary

August 28, 1992

Mr. Mark Sabatino
Cape Environmental Mgt. Inc.
20280 Vermont Ave., Ste. 225
Torrance, CA 90502

Hygeia Ref. No.: C1122920069

Date Received: August 28, 1992

Date Analyzed: August 28, 1992

No. Samples: 9

Analytical Method: EPA 600/M4-82-020

Client Project: 41017.00

Microscopist: Sean McGee

NIST / NVLAP Lab Code No. 1011-04
California Dept of Health Services
ELAP Certificate No. 1269

Client ID No. Hygeia ID No.	Sample Description	Asbestos Detected	Analytical Results	Q.C.
W-29-02 84117C	insulation wrap	No	20% cellulose 50% fibrous glass 30% mineral filler	
W-29-03 84118C	insulation wrap	No	20% cellulose 50% fibrous glass 30% mineral filler	
W-29-04 84119C	insulation wrap	No	20% cellulose 50% fibrous glass 30% mineral filler	
W-32-01 84120C	duct insulation tape	Yes	70% chrysotile 30% mineral filler	X
W-32-02 84121C	duct insulation tape	No	30% cellulose 70% mineral filler	
W-32-03 84122C	duct insulation tape	Yes	70% chrysotile 10% cellulose 20% mineral filler	

Bulk Sample Analysis Summary

Page 2

Date: August 28, 1992

Hygeia Ref. No.: C1122920069

Microscopist: Sean McGee

Client ID No. Hygeia ID No.	Sample Description	Asbestos Detected	Analytical Results	Q.C.
--------------------------------	--------------------	----------------------	--------------------	------

W-32-04 duct insulation tape

Yes

60% chrysotile
5% cellulose
35% mineral filler

84123C

W-33-01 pipe insulation

No

30% cellulose
60% fibrous glass
10% mineral filler

84124C

W-34-01 pipe insulation

No


50% fibrous glass
50% mineral filler

84125C

Microscopist:

Laboratory Supervisor:

QUALITY CONTROL LABORATORY



82 W. Sierra Madre Blvd
Sierra Madre, California
91024-2434

818-355-4711
FAX: 818-355-4497

Hygeia Environmental Laboratories Inc.

Atlanta
Boston
Los Angeles
New York

Bulk Sample Analysis Summary

August 10, 1992

Mr. Mark Sabatino
Cape Environmental Mgt. Inc.
20280 S. Vermont Ave.
Torrance, CA 90502

Hygeia Ref. No.: C1122920063
Date Received: July 31, 1992
Date Analyzed: August 10, 1992
No. Samples: 9
Analytical Method: EPA 600/M4-82-020

Client Project: Webster
Microscopist: Cesar Sandoval

NIST / NVLAP Lab Code No. 1011-04
California Dept of Health Services
ELAP Certificate No. 1269

Client ID No. Hygeia ID No.	Sample Description	Asbestos Detected	Analytical Results	Q.C.
QC-W-01-1 78151C	floor tile	Yes	2% chrysotile 98% mineral filler	
QC-W-01-1 78151C	mastic	Yes	2% chrysotile 3% cellulose 30% mineral filler 65% organic binders	
QC-W-02-1 78152C	floor tile	Yes	5% chrysotile 95% mineral filler	
QC-W-02-1 78152C	mastic	Yes	4% chrysotile 36% mineral filler 60% organic binders	
QC-W-11-1 78153C	n/a	No	10% cellulose 5% fibrous glass 85% mineral filler	X
QC-W-15-1 78154C	n/a	No	70% cellulose 5% mineral filler 25% opaques	

Bulk Sample Analysis Summary

Page 2

Date: August 10, 1992

Hygeia Ref. No.: C1122920063

Microscopist: Cesar Sandoval

Client ID No. Hygeia ID No.	Sample Description	Asbestos Detected	Analytical Results	Q.C.
QC-W-19-1 78155C	n/a	No	25% cellulose 50% mineral filler 25% opaques	
QC-W-22-1 78156C	n/a	No	3% cellulose 97% mineral filler	
QC-W-28-1 78157C	n/a	Yes	10% chrysotile 25% mineral filler 65% organic binders	
QC-W-29-1 78158C	n/a	No	70% cellulose 10% mineral filler 20% organic binders	
QC-W-30-1 78159C	n/a	Yes	3% chrysotile 97% mineral filler	

Microscopist:



Laboratory Supervisor:



Appendix C


Response Action Ratings

**FIGURE 4 - RESPONSE ACTION HIERARCHY
THERMAL SYSTEM INSULATION (TSI- ACM)**

Response Action Priorities

- 1) Isolate area and restrict access. Immediate removal is mandatory; contact an Accredited Project Designer (APD).
- 2) Isolate area and restrict access. Repair or Remove Immediately; contact an APD. If ACBM remains following response action, followup with O&M; restrict access to reduce disturbance potential.
- 3) Continue O&M. Limit access to reduce disturbance potential. Schedule repair or removal on a priority basis; contact an APD. If ACBM remains following response action, followup with O&M; limit access to reduce disturbance potential.
- 4) Continue O&M. Limit access to reduce disturbance potential. Schedule repair or removal when practical and cost effective; contact an APD.
- 5) Continue O&M. Schedule repair or removal when practical and cost effective; contact an APD.
- 6) Same as 5 (lower priority basis).
- 7) Continue O&M. Reduce disturbance potential where practical. Remove when practical and cost effective; contact an APD.
- 8) Continue O&M until major renovation/demolition requires removal under NESHAPs or until hazard potential changes. Remove when practical and cost effective; contact an APD.

FIGURE 1 - DECISION TREE
THERMAL SYSTEM INSULATION
ASBESTOS CONTAINING BUILDING MATERIALS
(TSI-ACMs)

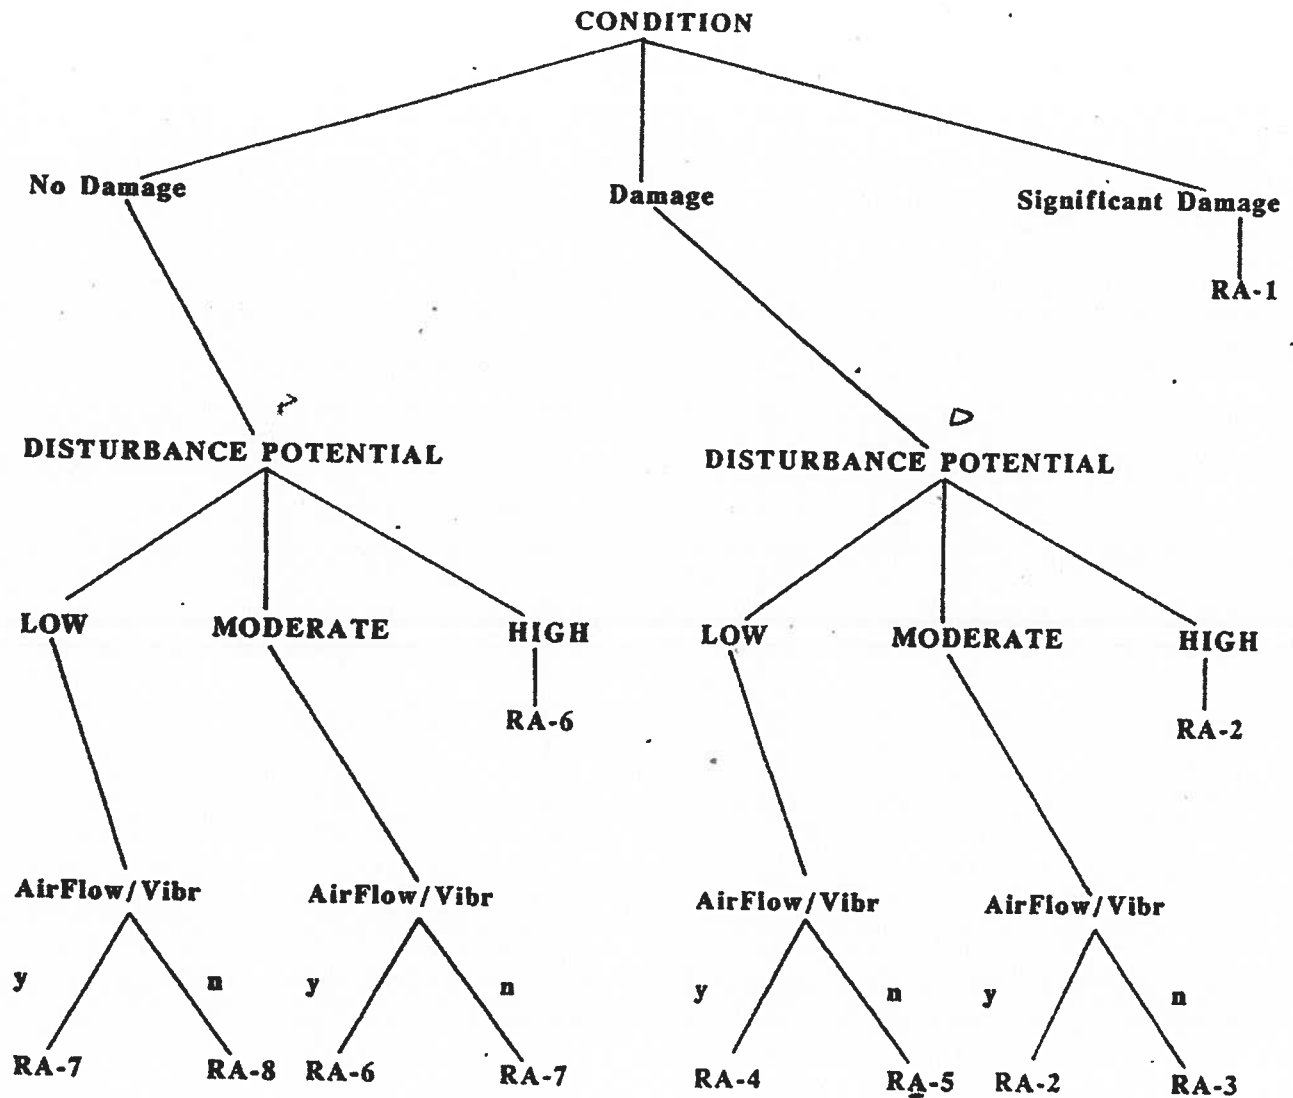


**FIGURE 5 - RESPONSE ACTION HIERARCHY
SURFACING MATERIALS (SURFACING - ACBMs)**

Response Action Priorities

- 1) Isolate area and restrict access. Immediate removal is mandatory; contact an Accredited Project Designer (APD).
- 2) Isolate area and restrict access. Repair or Remove Immediately; contact an APD. If ACBM remains following response action, followup with O&M; restrict access to reduce disturbance potential.
- 3) Continue O&M. Limit access to reduce disturbance potential. Schedule repair or remove on a priority basis; contact an APD. If ACBM remains following response action, followup with O&M; limit access to reduce disturbance potential.
- 4) Continue O&M. Limit access to reduce disturbance potential. Schedule repair or remove when practical and cost effective; contact an APD.
- 5) Continue O&M. Schedule repair or remove when practical and cost effective; contact an APD.
- 6) Same as 5 (lower priority basis).
- 7) Continue O&M. Reduce disturbance potential where practical. Remove when practical and cost effective; contact an APD.
- 8) Continue O&M until major renovation/demolition requires removal under NESHAPs or until hazard potential changes. Remove when practical and cost effective; contact an APD.

FIGURE 2 - DECISION TREE

SURFACING MATERIAL
ASBESTOS CONTAINING BUILDING MATERIALS
(SURFACING-ACBMs)

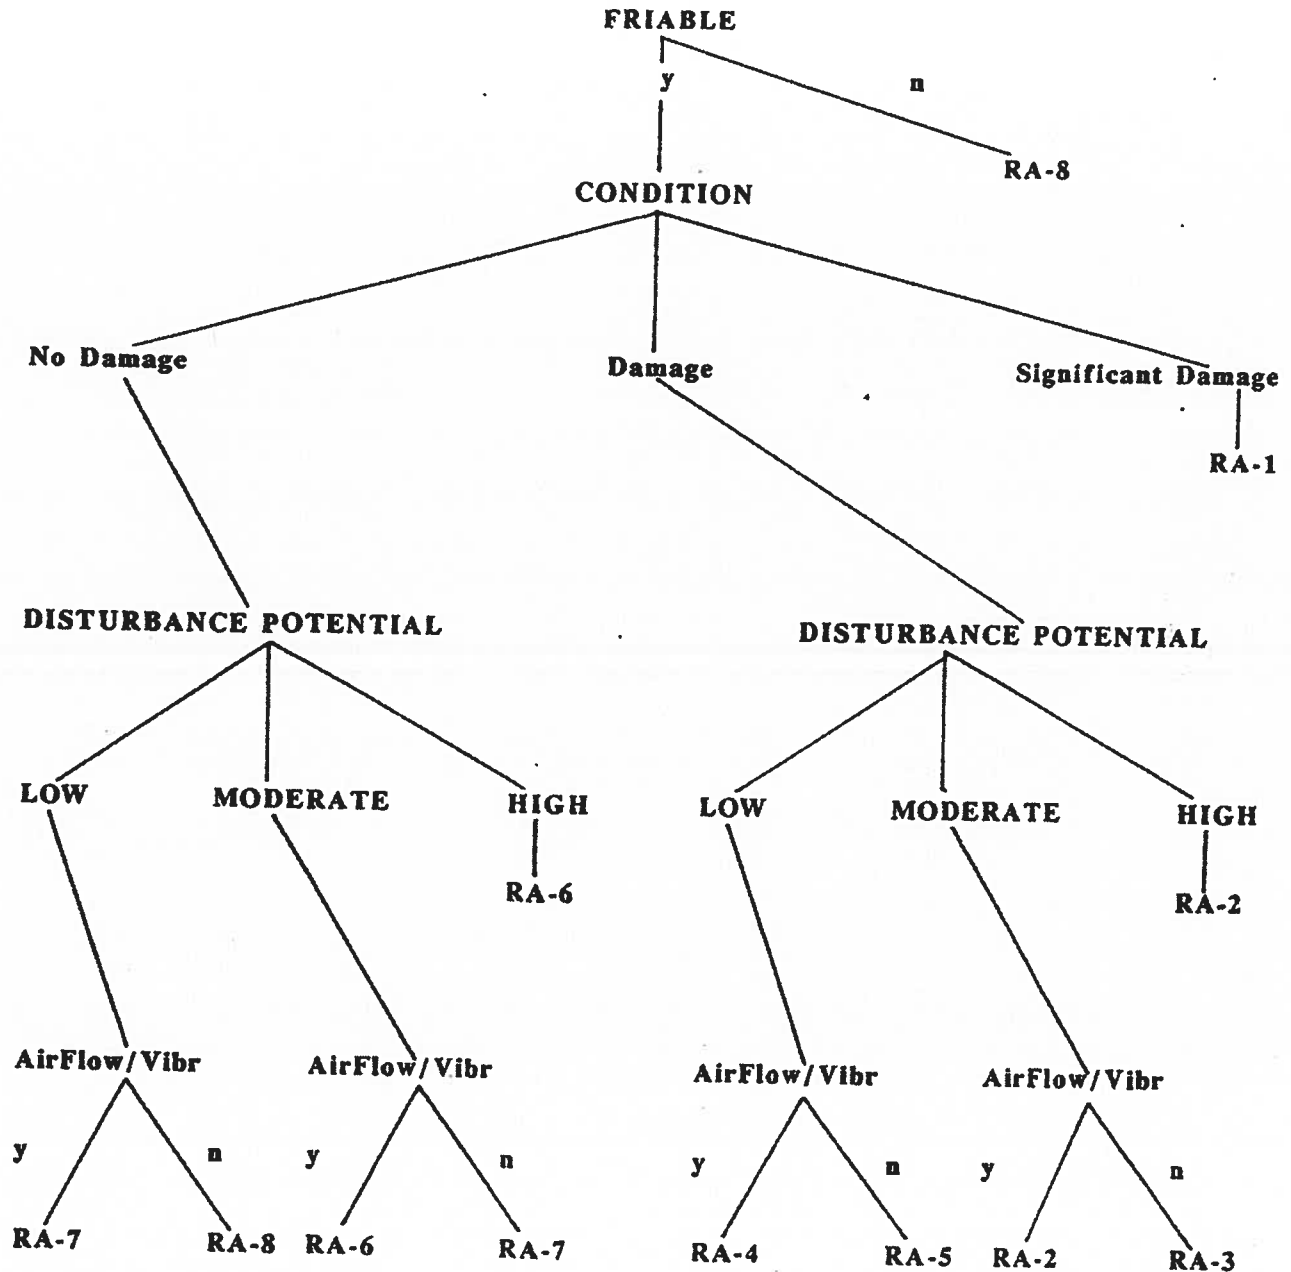


**FIGURE 6 - RESPONSE ACTION HIERARCHY
MISCELLANEOUS MATERIALS (MISC.- ACBMs)**

Response Action Priorities

- 1) Isolate area and restrict access. Immediate removal is mandatory; contact an Accredited Project Designer (APD).
- 2) Isolate area and restrict access. Repair, Encapsulate, or Remove Immediately; contact an APD. If ACBM remains following response action, followup with O&M; restrict access to reduce disturbance potential.
- 3) Continue O&M. Limit access to reduce disturbance potential. Schedule repair, encapsulate, or remove on a priority basis; contact an APD. If ACBM remains following response action, followup with O&M; limit access to reduce disturbance potential.
- 4) Continue O&M. Limit access to reduce disturbance potential. Schedule repair, encapsulate, or remove when practical and cost effective; contact an APD.
- 5) Continue O&M. Schedule repair, encapsulate, or remove when practical and cost effective; contact an APD.
- 6) Same as 5 (lower priority basis).
- 7) Continue O&M. Reduce disturbance potential where practical. Remove when practical and cost effective; contact an APD.
- 8) Continue O&M until major renovation/demolition requires removal under NESHAPs or until hazard potential changes. Remove when practical and cost effective; contact an APD.

FIGURE 3 - DECISION TREE

MISCELLANEOUS MATERIAL
ASBESTOS CONTAINING BUILDING MATERIALS
(MISC.-ACBMs)

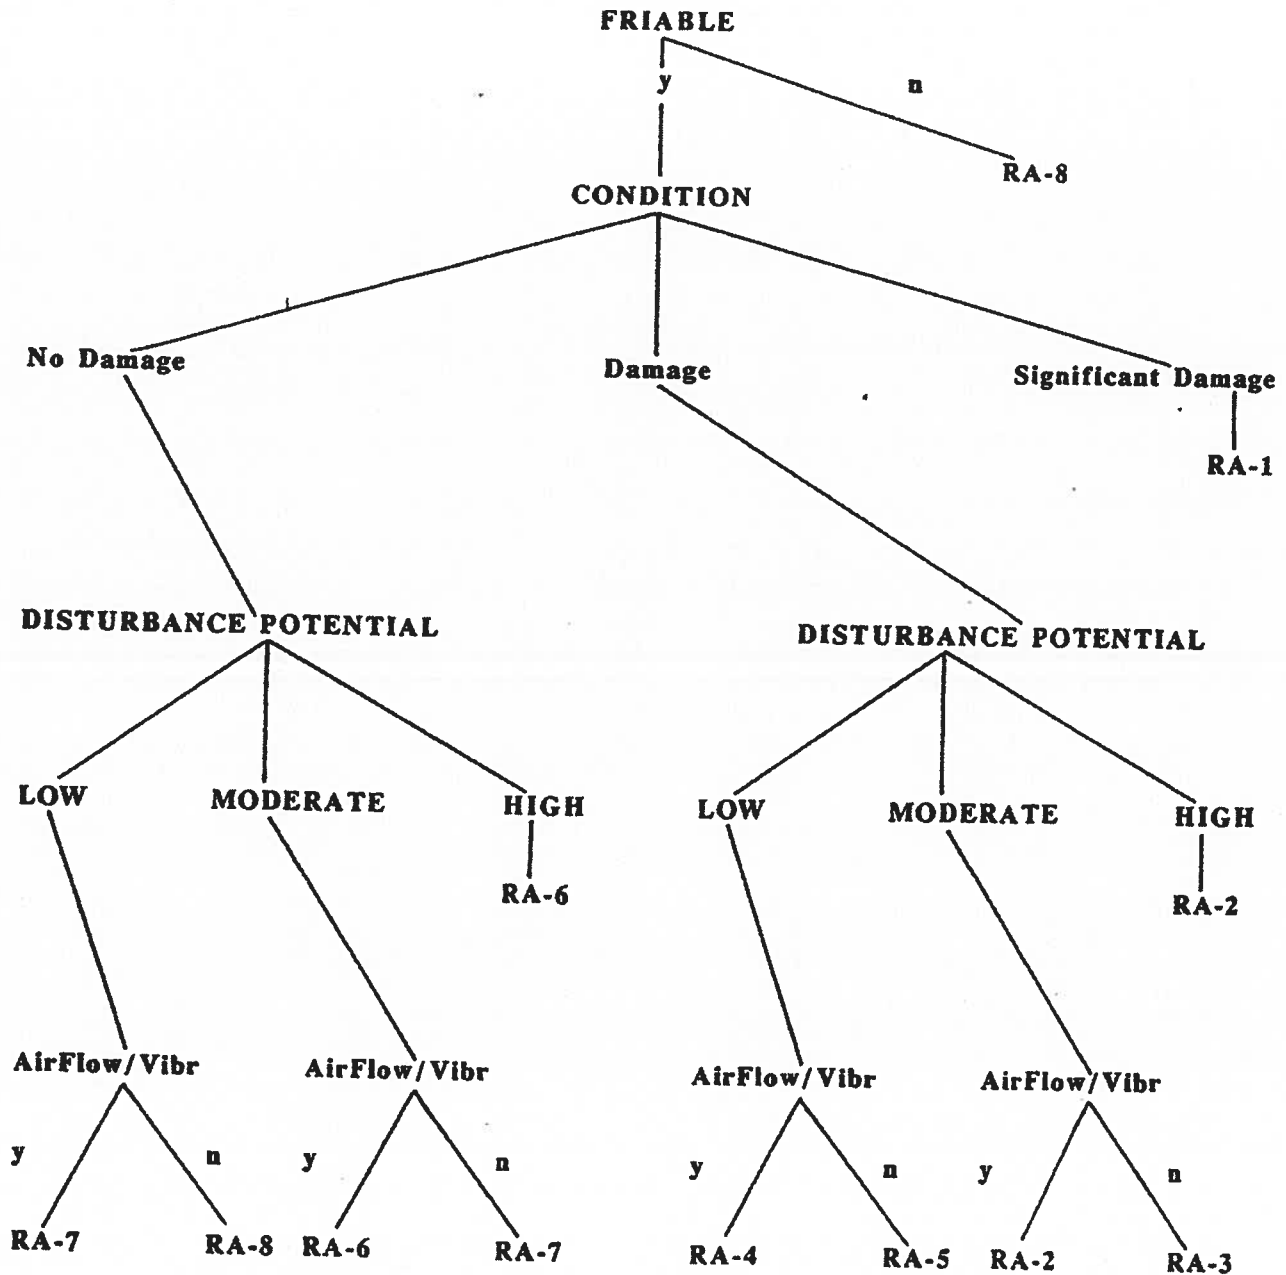

Appendix D

Field Sheets

3-Year Re-Inspection Material Inventory

Client:

Project No:

Project Name:

SMMUSD

110-006

Webster ES

Page 1 of 15

3/18/2010

BIDG A

Material Class (1)	Material	Material Location	Current Assessment (2)	Final (3)	Approximate Quantity	Results (3) of Sample	Recommendation (4)
S	Stucco	Ext. walls	ND	N	3000 sq. ft (3 samples)	POS. <190	8
	Plaster	Rm 17-20, Water closets			3500 sq. ft (3 samples)	NEG.	N/A
	Joint Compound	Rms 17, 18 & 20 Dividing walls			800 sq. ft (3 samples)	NEG.	
M	Drywall				800 sq. ft	NEG.	
	Carpet Glue	Rms 17-20			2800 sq. ft	NEG.	
	12" Lt. green speckled Fl. tile & glue	Rm 17, Rm 18 under carpet Rm 20			2800 sq. ft		
	4" dk green coverbase & glue	Rm 17, 19, 20			90 Ln. ft		
	4" brown coverbase & glue	Rm 18			75 Ln. ft		
	4" gray coverbase & glue	Rm 20			30 Ln. ft		

- (1) S – surfacing, TSI – thermal system insulation, M – miscellaneous
- (2) ND – not damaged, D – damaged, SD – significantly damaged
- (3) POS – previously identified as positive, NEG – previously identified as negative, ASSUMED – 1 = new material, not sampled, assumed asbestos-containing; ASSUMED – 2 = not enough samples collected, material is assumed asbestos-containing
- (4) For response actions 1–8 refer to "Response Action Ratings Sheet"

3-Year Re-Inspection Material Inventory

Client:

Project No:

Project Name:

SMMUSD

110-006

Webster ES

Page 2 of 15

Material Class	Material	Material Location	Current Assessment (A)	Findings (B)	Approximate Quantity	Results (C) or Sample	Recommendations (D)
M	2'x4' Fissured Ceiling Panel	Rm 17-20 (B)	ND	Y	3300 sq. ft.	neg.	
	HVAC Duct Tape (gray)	Heater closets 1-4		N	80 sq. ft.	neg.	
M	Heater units	Heater closets		N	4 ea.	assumed	
	Window putty	Brick window	ND	N	2500 Lbs.	-1 neg	8 n/a
M	12" Beige Specimen Fl. Tile & adhesive	Rm 14	ND	N	120 sq. ft.	assumed -1	7
BIDG B							
S	Stucco	Ext. walls	ND	N	800 sq. ft.	neg.	
SM	Gypsum lt. compound	Classrooms, work rms (dividing walls) toilets & storage rms in classrooms			1600 sq. ft.	neg. 203 376 (5 samples)	
M	Dry wall	Storage Rm			750 sq. ft.	neg.	
SM	lt compound					neg.	

(1) S - surfacing, TSI - thermal system insulation, M - miscellaneous
 (2) ND - not damaged, D - damaged, SD - significantly damaged
 (3) POS - previously identified as positive, NEG - previously identified as negative, ASSUMED - 1 = new material, not sampled, assumed asbestos-containing;
 ASSUMED - 2 = not enough samples collected, material is assumed asbestos-containing

(4) For response actions 1-8 refer to "Response Action Ratings Sheet"

Window putty - each window

1200' neg

coffey environments

SPECIALISTS IN ENVIRONMENTAL,
SOCIAL AND SAFETY PERFORMANCE

3-Year Re-Inspection Material Inventory

Client:

Project No:

Project Name:

SMMUSD

110-006

Webster ES

Page 3 of 15

Material Class (1)	Material	Material Location	Current Assessment (2)	Future (Y or N)	Approximate Quantity	Results (3) Sample 1	Recommendation / Remarks (4)
M	9" gray Fl-tile w/ yellow streaks	Workrooms 1 & 2	ND	N	80 sq. ft.	POS.	
M	Dry wall	Heater Rms	L	L	600 sq. ft.	NEG.	
SM	Jt. Compound		L	L	L	POS	
M	12" Lt green Fl-tile & glue	Rm 11 & 12	ND	N	500 sq. ft.	NEG. ASSUMED 1	
	4" Dk green couchbase & glue			L	180 sq. ft.		
	Carpet glue			L	1800 sq. ft.		
	2'x4' fissured ceiling panel			Y	2300 sq. ft.		
	Heater Units gasket	Rm 11 & 12 Heater closets		N	2 ea.	ASSUMED - 1	
	12" Random Peg hole ceiling tile	Rm 11 & 12 southside	L	Y	10 sq. ft.	NEG.	

Defect by Assumed 1

- (1) S - surfacing, TSI - thermal system insulation, M - miscellaneous
 (2) ND - not damaged, D - damaged, SD - significantly damaged
 (3) POS - previously identified as positive, NEG - previously identified as negative, ASSUMED - 1 = new material, not sampled, assumed asbestos-containing;
 ASSUMED - 2 = not enough samples collected, material is assumed asbestos-containing
 (4) For response actions 1-8 refer to "Response Action Ratings Sheet"

11/2/12 (day - or so)

Non-Significant

Chapman
 environments
 SPECIALISTS IN ENVIRONMENTAL,
 SOCIAL AND SAFETY PERFORMANCE

3-Year Re-Inspection Material Inventory

Client:

Project No:

Project Name:

SMM USD

110-006

Webster ES

Page 4 of 15

BIDG C

Material Class (1)	Material	Material Location	Current Assessment (2)	Visible (3) (Y/N)	Approximate Quantity	Results (3) (Sample 1)	Recommendations (4)
S	Stucco	Ext. walls	ND	N	3900 sq. ft.	NEG. (3 samples)	
	Rough Plaster	Boys & girls rms; custodian & electrical rm			930 sq. ft.	NEG. (3 samples)	
	Jt. compound	Rms 13-16, 16A, boys & girls rms; Electrical & custodian rm ceilings			3100 sq. ft.	POS.	
		Heater closets 1-4			100 sq. ft.	POS.	
M	12" gray fl. tile w/ brown streaks & mastic	Under carpet in ESL rm & Classroom 15	ND	N	800 sq. ft.	POS.	
	12" random pinhole ceiling tile glue	ESL Rm		Y	600 sq. ft.	NEG	
	12" random pinhole ceiling tile (new)	Replacement in ESL Rm			20 sq. ft.		
		ESL Rm			560 sq. ft.		
	WAC Duct Tape	Heater closets	ND	N	4 ea.	NEG.	

- M Under party roof, windows
- (1) S - surfacing, TSI - thermal system insulation, M - miscellaneous
 (2) ND - not damaged, D - damaged, SD - significantly damaged
 (3) POS - previously identified as positive, NEG - previously identified as negative, ASSUMED - 1 = new material, not sampled, assumed asbestos-containing; ASSUMED - 2 = not enough samples collected, material is assumed asbestos-containing
 (4) For response actions 1-8 refer to "Response Action Ratings Sheet"

3-Year Re-Inspection Material Inventory

Client:

SMMUSD

Project No:

110 - 006

Project Name:

Webster ES

Page 5 of 15

Material Class (1)	Material	Material Location	Current Assessment (2)	Rating (3) or Y/N	Approximate Quantity	Results (3) or Sample #	Recommendations / Response Action (4)
M	Drywall	Heater closet 1-4	ND	N	700 sq. ft.	neg.	
	12" Light speckled green fl. tile & glue	Rms 13-16	ND	N	800 sq. ft.	neg. Assumed 2	
	4" dk green concrete & glue				240 ln. ft.	neg.	
	4" gray concrete & glue	ESL rm (16A), Rm 16			70 ln. ft.	neg.	
	2'x4' Assured ceiling panel	Rm 13-16		Y/NEG	3800 sq. ft.	neg.	
	Chalkboard	Rms 13-16, 16A (ESL)			9 ea	Assumed	
	Heater Unit Gasket				5 ea		
BIDG D	Administration						
S	Stucco	Ext. walls	ND	N	2950 sq. ft.	neg (5 samples)	

(1) S - surfacing, TSI - thermal system insulation, M - miscellaneous

(2) ND - not damaged, D - damaged, SD - significantly damaged

(3) POS - previously identified as positive, NEG - previously identified as negative, ASSUMED - 1 = new material, not sampled, assumed asbestos-containing; ASSUMED - 2 = not enough samples collected, material is assumed asbestos-containing

(4) For response actions 1-8 refer to "Response Action Ratings Sheet"

3-Year Re-Inspection Material Inventory

Client:

Project No:

Project Name:

SMMUSD

110-006

Winstar FS

Page 6 of 15

Material Class	Material	Material Location	Current Assessment	Future (Y/N)	Approximate Quantity	Results (3 or more samples)	Response Action
M	12" brown Fl. tile w/ peach spec	Rm 19 & 20 under carpet	ND	2	600 sq. ft.	POS. 4190-tile 370 mastic	
S	Rough plaster ceiling	Heater closet & electrical rm	ND	2	700 sq. ft.	neg (3 samples)	
M	9" dark tan w/ brown Fl. tile & mastic	Electrical Rm 4	D	1	40 sq. ft.	370-tile 370-mastic POS.	
M	4" brown concrete w/ glue	Electrical rm	ND	2	20 ln. ft.	neg	
M	Drywall	All dividing walls except elec. rm & heater closets	ND	2	3800 sq. ft.	neg	
	Jt. Compound		ND	2	2	(3 samples) neg.	
	4" gray concrete & glue	Nurses office, audio rm, work rm, principals office, main office, hall		2	280 ln. ft.	Assumed neg	
	HVAC Duct Tape	Heater rm		2	3 sq. ft.		
	2'x4' Fissured ceiling Panel	Nurses office, audio room, work rm, principals office, main office, hall		Y	1800 sq. ft.		

Wm. de puth
 (1) S - surfacing, TSI - thermal system insulation, M - miscellaneous
 (2) ND - not damaged, D - damaged, SD - significantly damaged
 (3) POS - previously identified as positive, NEG - previously identified as negative, ASSUMED - 1 = new material, not sampled, assumed asbestos-containing
 ASSUMED - 2 = not enough samples collected, material is assumed asbestos-containing
 (4) For response actions 1-8 refer to "Response Action Ratings Sheet"

3-Year Re-Inspection Material Inventory

Client:

Project No:

Project Name:

SMMUSD

110-006

Webster ES

Page 7 of 15

Material Class (1)	Material	Material Location	Current Assessment (2)	Results (3) of Sampling	Approximate Quantity	Recommended Action (4)
M	Heater Unit Grasscut	Heater Rm	ND	Assumed -1	1200	
M	12" H. green Fl tile & glue	Principals office, main office, nurses office, work rm / hall	ND	neg.	1400 sq. ft	
Building E						
S	Stucco	Ext. walls	ND	neg. (5 samples)	1950 sq. ft	
S	Jt. Compound	Office 2, East wall computer rm walls	ND	(4 samples) neg.	480 sq. ft	
M	Drywall			neg.		
S	Rough Plaster walls	Library		neg.	2950 sq. ft	
S	Smooth Plaster walls	Office 1 & 2, heater closet		(5 samples) neg.	2400 sq. ft	
M	12" random Polyloc wall tile glue	Heater closet		(5 samples) Assumed -1	100 sq. ft	

(1) S - surfacing, TSI - thermal system insulation, M - miscellaneous

(2) ND - not damaged, D - damaged, SD - significantly damaged

(3) POS - previously identified as positive, NEG - previously identified as negative, ASSUMED - 1 = new material, not sampled, assumed asbestos-containing; ASSUMED - 2 = not enough samples collected, material is assumed asbestos-containing

(4) For response actions 1-8 refer to "Response Action Ratings Sheet"

3-Year Re-Inspection Material Inventory

Client:

Project No:

Project Name:

SMUSD

110 - 506

Webster ES

Page 8 of 15

Material Class (1)	Material	Material Location	Current Assessment (2)	Findings (3 or 4)	Approximate Quantity	Results (3) or Sample	Recommendations / Remarks (4)
M	Carpet Glue	Rm 7	ND	N	900 sq. ft	neg.	
M	Brown Fl. tile & mastic	Rm 7 under carpet			7		
	12" gray speckled Fl. tile	Office 1 & 2			700 sq. ft	neg.	
	12" lt. green Fl. tile & glue	Rm 7			250 sq. ft	neg.	
	4" dk green concrete & glue	Library, Office 2, 1 & computer rm			400 m. ft	neg.	
	HVAC Duct Tape	Heater closet			2 sq. ft	neg.	
	2' x 4' Fissured ceiling panel	Library, Rm 7		Y	3000 sq. ft	neg.	
	Heater Unit gasket	Heater closet		N	1 ea.	Assumed -	
	Chalkboard	Rm 7		N	2 ea.	Assumed -	

- (1) S – surfacing, TSI – thermal system insulation, M – miscellaneous
 (2) ND – not damaged, D – damaged, SD – significantly damaged
 (3) POS – previously identified as positive, NEG – previously identified
 ASSUMED – 2 = not enough samples collected, material is assumed
 (4) For response actions 1–8 refer to "Response Action Ratings Sheet"

3-Year Re-Inspection Material Inventory

Client:

Project No:

Project Name:

SMMUSD

110-006

Webster ES

Page 14 of 17

Material Class (1)	Material (2)	Material Location (3)	Current Assessment (4)	Material Quantity (5)	Results (6) or Sample #	Recommendation (7)
M	Drywall	Rm 8-10	ND	100 sq. ft.	neg.	
	12" x 12" green fl. tile & glue	Rm 8-10		240 sq. ft.	neg.	
	4" gray concrete & glue	Rm 8-10		90 sq. ft.	neg.	
	HVAC Duct tape	Mech Rm.		5 sq. ft.	neg.	
	carpet glue	Rm 9-10		2700 sq. ft.	neg.	
	2'x4" fissured ceiling panel	Rm 9-10		3400 sq. ft.	neg.	
	Heater unit	Mech. Rm.		1 cu. ft.	Assumed	
	Note: Chalkboard	all rooms 8-10		6 ea.	- In m. for 1st dy over	
Building G1						
S	Stucco	Ext. walls	ND	4500 sq. ft.	POS. <190 (7 samples)	

- 300 Lg ft 21 7/10
- (1) S - surfacing, TSI - thermal/system insulation, M - miscellaneous
 (2) ND - not damaged, D - damaged, SD - significantly damaged
 (3) POS - previously identified as positive, NEG - previously identified as negative, ASSUMED - 1 = new material, not sampled, assumed asbestos-containing
 ASSUMED - 2 = not enough samples collected, material is assumed asbestos-containing
 (4) For response actions 1-8 refer to "Response Action Ratings Sheet"

3-Year Re-Inspection Material Inventory

Client:

Project No:

Project Name:

SMMUSD

110-006

Webster ES

Page 11 of 15

Material Class	Material	Material Location	Current Assessment (A)	Public (B)	Approximate Quantity	Results (C) of Sample (D)	Recommendations (E) for Action (F)
M	Gray w/ black dots Fl. Sheeting	Kitchen	ND	N	1200 sq. ft	neg.	
	12" off-white Fl. tile & mastic	Auditorium	L	L	2500 sq. ft	POS. tile = 570 Mastic = neg.	
	9" tan Fl. tile & mastic	Kitchen	N/A	N	300 sq. ft	not obs- ned	
	9" dk tan Fl. tile & mastic	Janitors rm	D	N	80 sq. ft	POS.	
S	Rough Plaster ceiling	Auditorium, Kitchen, Storage, Teachers work rm, Mech. Rm.	ND	N	1900 sq. ft	neg. (5 Samples)	
S	Rough Plaster walls	Storage rm, Mech. Rm.			1900 sq. ft	neg (5 Samples)	
M	12" brown speckled Fl. tile & glue	Auditorium East Side			300 sq. ft	Assumed -1	
M	4" blue concrete & glue	Auditorium			300 sq. ft	L	
S	Smooth Plaster ceiling	Teachers dining rm & RR's	L	L	1500 sq. ft	(3 Samples) neg	

M
240' sf. Assumed 7

(1) S - surfacing, TSI - thermal system insulation, M - miscellaneous
 (2) ND - not damaged, D - damaged, SD - significantly damaged
 (3) POS - previously identified as positive, NEG - previously identified as negative, ASSUMED - 1 = new material, not sampled, assumed asbestos-containing
 ASSUMED - 2 = not enough samples collected, material is assumed asbestos-containing
 (4) For response actions 1-8 refer to "Response Action Ratings Sheet"

3-Year Re-Inspection Material Inventory

Client:

Project No:

Project Name:

SMMUSD

110-006

Webster ES

Page 12 of 15

Material Class (1)	Material	Material Location	Current Assessment (2)	Findings (3)	Approximate Quantity	Results (3) or Sample #	Recommendations (4)
S	Smooth Plaster walls	Teachers dining rm, Kitchen, teachers union rm, Auditorium & RRS, Main rm, Stage area	ND	2	8500 sq. ft (7-samples) neg. (E)	neg.	
M	Drywall	Storage area	ND	2	60 sq. ft neg. (E)	neg.	
M	4" light gray concrete & glue	Stage dining rm			90 sq. ft neg. (E)	neg.	
M	12" Pinkish w/ dark spots fl. tile	Dining rm			700 sq. ft	neg.	
M	Red brick	Kitchen	ND	2	30 sq. ft	neg.	
M	4" brown concrete & glue	Stage	ND	2	170 sq. ft	neg.	
M	Heater unit Gasfueled	Mech. rm	ND	2	1 each	Assumed -	
M	12" straight peg hole ceiling tile	Kitchen, S/E Storage, teachers union, kitchen	ND	2	3000 sq. ft	neg.	
M	12" fissured ceiling tile	Auditorium	ND	2	1900 sq. ft	neg.	

(1) S – surfacing, TSI – thermal system insulation, M – miscellaneous

(2) ND – not damaged, D – damaged, SD – significantly damaged

(3) POS – previously identified as positive, NEG – previously identified as negative, ASSUMED – 1 = new material, not sampled, assumed asbestos-containing;

ASSUMED – 2 = not enough samples collected, material is assumed asbestos-containing

(4) For response actions 1–8 refer to "Response Action Ratings Sheet"

3-Year Re-Inspection Material Inventory

Client:

Project No:

Project Name:

SMMUSD

110-006

Webster ES

Page 13 of 15

Material Class	Material	Material Location	Current Assessment	Frangible (Y/N)	Approximate Quantity	Results (3 or Sample)	Response Action
M	Mastic associated w/ 12" fiberglass ceiling tile	auditorium	ND	EC	1400 sq. ft	neg.	
M	HVAC exhaust vent pipe joint tape	Boiler rm	ND	2	30 sq. ft	neg.	
M	12" black speckled fl. tile & glue	Hall rm	ND	2	200 sq. ft	Assumed -1	
M	4" black concrete & glue		ND	2	30 lin. ft	2	
S	BIDG H						
S	Ext. wall shield	Ext. walls	ND	2	4000 sq. ft (5 samples)	neg.	
S	Rough plaster wall	Janitors, Elect. rms	ND	2	800 sq. ft (3 samples)	neg.	
M	12" Straight Pegmatite tile & mastic	Rms 1-4 above ceiling panels	ND	Y	300 sq. ft	neg.	
M	Drywall	Heater closets & south side soffit rms 1-4	ND	2	950 sq. ft	neg.	

Windsor path

East corner

2800 sq. ft

POS

- (1) S - surfacing, TSI - thermal system insulation, M - miscellaneous
- (2) ND - not damaged, D - damaged, SD - significantly damaged
- (3) POS - previously identified as positive, NEG - previously identified as negative, ASSUMED - 1 = new material, not sampled, assumed asbestos-containing; ASSUMED - 2 = not enough samples collected, material is assumed asbestos-containing
- (4) For response actions 1-8 refer to "Response Action Ratings Sheet"

3-Year Re-Inspection Material Inventory

Client:

Project No:

Project Name:

SMMUSD

110-006

Webster ES

Page 15 of 15

Pontables 21/22/23

Material Class (1)	Material	Material Location	Current Assessment (2)	Visible (Y or N)	Approximate Quantity	Results (3) or Sample #	Recommendations (4)
M	Drywall	Pontables 21-23	ND	N	3600 sq. ft	neg.	
	2'x4' fissured ceiling panel	Pontable 21		Y	900 sq. ft		
	4" dia blue concrete base & glue	Pontable 21-23		N	240 ln. ft		
	Carpet glue				3400 sq. ft		
	12" Lt. blue speckled Floor tile	Pontable 22			30 sq. ft		
Walkways							
S	Walkway Stucco ceiling	All walkways	ND	N	4800 sq. ft	neg.	

- (1) S - surfacing, TSI - thermal system insulation, M - miscellaneous
 (2) ND - not damaged, D - damaged, SD - significantly damaged
 (3) POS - previously identified as positive, NEG - previously identified as negative, ASSUMED - 1 = new material, not sampled, assumed asbestos-containing; ASSUMED - 2 = not enough samples collected, material is assumed asbestos-containing
 (4) For response actions 1-8 refer to "Response Action Ratings Sheet"

Appendix E

Assessments

ASSESSMENT SHEET

Functional Space Number _____
Homogenous Area Letter _____

Sample Number N/A
School Number _____
Building Number C

Functional Space Description Classroom 3
School Name Webster ES
Building Name C

1. Friable Material: 8x4' Fissured ceiling Panel

2. Non-friable Material: _____

3. Damage Rating:

- (A) No Damage: X
(B) Moderate Damage _____
(1) <= 10% Distributed _____
(2) <= 25% Localized _____
(C) Significant Damage: _____
(1) >10% Distributed _____
(2) >25% Localized _____

4. Type of Damage

- (1) Deterioration _____
(2) Water Damage _____
(3) Air Erosion _____
(4) Vandalism _____
(5) Other _____

5. Description of Damage:

- | | | | |
|---------------|------------------------|------------------------------|---------------------------|
| (1) Blisters | (4) Crushed Insulation | (7) Dislodged/Missing Pieces | (11) Scrape Marks |
| (2) Buckling | (5) Debris on Floor | (8) Gouges | (12) Stains/Discoloration |
| (3) Crumbling | (6) Delamination | (9) Punctures | (13) Torn/Dislodged |
| | | (10) Ripped/Missing Jackets | (14) Water Damage |

6. Disturbance Potential:

(A) Potential For Contact:

- (1) Very Likely _____
(2) Accidental Contact Possible _____
(3) Small Disturbance Likely X
(4) Large Disturbance Likely _____
(>3 sq. or linear ft.) _____

(B) Possible Contact Factors:

- (1) Near Systems Requiring Repair/Maint. _____
(2) High Traffic Area X
(3) Within Reach of Students and Teachers _____
(4) Other _____

(C) Occupancy:

- (1) Maint. Workers X
(2) Students/Teachers X
(3) Public X
(4) Area Not Normally Entered _____

(1) 1/Day Approx. Hours _____
(2) 1/Wk. Approx. Hours _____
(3) 1/Mo. Approx. Hours _____

(D) Influence of Vibration:

- (0) None X
(1) Low _____
(2) Moderate _____
(3) High _____

(E) Source of Vibration:

- (1) Athletic Events _____
(2) Mechanical Equipment _____
(3) Sound Waves _____
(4) Other X

(F) Potential For Air Erosion:

- (0) None X
(1) Low _____
(2) Moderate _____
(3) High _____

(G) Source of Air Erosion:

- (1) Air Plenum _____
(2) Air Shaft _____
(3) Elevator Shaft _____
(4) Other _____

(H) Preventative Measures:

- (1) Restrict Access _____
(2) Other _____

7. Removal of ACM Mandatory (Repair Not Possible):

(Do not check above without giving reason below.)

Reason For Recommending Removal: _____

(A) Remodeling/Renovation Planned _____

(B) Demolition Planned _____

Comments: _____

Elmer Castro

(Print Name)

[Signature]

(Signature)

(EC)

3/15/10
(Date)

ASSESSMENT SHEET

Functional Space Number _____
Homogenous Area Letter _____

Sample Number N/A
School Number _____
Building Number B

Functional Space Description CLASSCS
School Name Webster ES
Building Name B

1. Friable Material: Y = 2' x 4' fissured ceiling panel

2. Non-friable Material: _____

3. Damage Rating:

- (A) No Damage: Y
(B) Moderate Damage _____
(1) <= 10% Distributed _____
(2) <= 25% Localized _____
(C) Significant Damage: _____
(1) >10% Distributed _____
(2) >25% Localized _____

4. Type of Damage

- (1) Deterioration _____
(2) Water Damage _____
(3) Air Erosion _____
(4) Vandalism _____
(5) Other No Damage

5. Description of Damage:

- | | | | |
|---------------|------------------------|------------------------------|---------------------------|
| (1) Blisters | (4) Crushed Insulation | (7) Dislodged/Missing Pieces | (11) Scrape Marks |
| (2) Buckling | (5) Debris on Floor | (8) Gouges | (12) Stains/Discoloration |
| (3) Crumbling | (6) Delamination | (9) Punctures | (13) Torn/Dislodged |
| | | (10) Ripped/Missing Jackets | (14) Water Damage |

6. Disturbance Potential:

(A) Potential For Contact:

- (1) Very Likely _____
(2) Accidental Contact Possible _____
(3) Small Disturbance Likely X
(4) Large Disturbance Likely _____
(>3 sq. or linear ft.)

(B) Possible Contact Factors:

- (1) Near Systems Requiring Repair/Maint. _____
(2) High Traffic Area Y
(3) Within Reach of Students and Teachers _____
(4) Other _____

(C) Occupancy:

- (1) Maint. Workers X
(2) Students/Teachers X
(3) Public X
(4) Area Not Normally Entered _____

(1) 1/Day Approx. Hours _____
(2) 1/Wk. Approx. Hours _____
(3) 1/Mo. Approx. Hours _____

(D) Influence of Vibration:

- ⓪ None Y
(1) Low _____
(2) Moderate _____
(3) High _____

(E) Source of Vibration:

- (1) Athletic Events _____
(2) Mechanical Equipment _____
(3) Sound Waves _____
(4) Other Y

(F) Potential For Air Erosion:

- (0) None Y
(1) Low _____
(2) Moderate _____
(3) High _____

(G) Source of Air Erosion:

- (1) Air Plenum _____
(2) Air Shaft _____
(3) Elevator Shaft _____
(4) Other _____

(H) Preventative Measures:

- (1) Restrict Access _____
(2) Other _____

7. Removal of ACM Mandatory (Repair Not Possible):

(Do not check above without giving reason below.)

Reason For Recommending Removal: _____

(A) Remodeling/Renovation Planned _____

(B) Demolition Planned _____

Comments: _____

Elmer Castro

(Print Name)

[Signature]

(Signature)

3/15/10 EC

(Date)

ASSESSMENT SHEET

Functional Space Number _____
Homogenous Area Letter _____

Sample Number _____
School Number 2
Building Number D

Functional Space Description Admin. Offices
School Name Webster ES
Building Name D

1. Friable Material: 8x4' fissured ceiling panel

2. Non-friable Material: _____

3. Damage Rating:
(A) No Damage: X
(B) Moderate Damage _____
 (1) <= 10% Distributed _____
 (2) <= 25% Localized _____
(C) Significant Damage: _____
 (1) >10% Distributed _____
 (2) >25% Localized _____

4. Type of Damage
(1) Deterioration _____
(2) Water Damage _____
(3) Air Erosion _____
(4) Vandalism _____
(5) Other _____

5. Description of Damage:

- | | | | |
|---------------|------------------------|------------------------------|---------------------------|
| (1) Blisters | (4) Crushed Insulation | (7) Dislodged/Missing Pieces | (11) Scrape Marks |
| (2) Buckling | (5) Debris on Floor | (8) Gouges | (12) Stains/Discoloration |
| (3) Crumbling | (6) Delamination | (9) Punctures | (13) Torn/Dislodged |
| | | (10) Ripped/Missing Jackets | (14) Water Damage |

6. Disturbance Potential:

(A) Potential For Contact:

- (1) Very Likely _____
(2) Accidental Contact Possible _____
(3) Small Disturbance Likely X
(4) Large Disturbance Likely _____
 (>3 sq. or linear ft.) _____

(B) Possible Contact Factors:

- (1) Near Systems Requiring Repair/Maint. _____
(2) High Traffic Area _____
(3) Within Reach of Students and Teachers X
(4) Other _____

(C) Occupancy:

- (1) Maint. Workers X
(2) Students/Teachers X
(3) Public X
(4) Area Not Normally Entered _____

(1) 1/Day Approx. Hours _____
(2) 1/Wk. Approx. Hours _____
(3) 1/Mo. Approx. Hours _____

(D) Influence of Vibration:

- (0) None X
(1) Low _____
(2) Moderate _____
(3) High _____

(E) Source of Vibration:

- (1) Athletic Events _____
(2) Mechanical Equipment _____
(3) Sound Waves _____
(4) Other X

(F) Potential For Air Erosion:

- (0) None X
(1) Low _____
(2) Moderate _____
(3) High _____

(G) Source of Air Erosion:

- (1) Air Plenum _____
(2) Air Shaft _____
(3) Elevator Shaft _____
(4) Other _____

(H) Preventative Measures:

- (1) Restrict Access _____
(2) Other _____

7. Removal of ACM Mandatory (Repair Not Possible):

(Do not check above without giving reason below.)

Reason For Recommending Removal:

(A) Remodeling/Renovation Planned _____

(B) Demolition Planned _____

Comments: _____

Elmer Castro

(Print Name)

[Signature]

(Signature)

8/15/10

(Date)

ASSESSMENT SHEET

Functional Space Number _____
Homogenous Area Letter _____

Sample Number N/A
School Number _____
Building Number E

Functional Space Description Library
School Name Webster ES
Building Name E

1. Friable Material: 2'x4' ceiling panel

2. Non-friable Material: _____

3. Damage Rating:

- (A) No Damage: X
(B) Moderate Damage _____
(1) <= 10% Distributed _____
(2) <= 25% Localized _____
(C) Significant Damage: _____
(1) >10% Distributed _____
(2) >25% Localized _____

4. Type of Damage

- (1) Deterioration _____
(2) Water Damage _____
(3) Air Erosion _____
(4) Vandalism _____
(5) Other _____

5. Description of Damage:

- | | | | |
|---------------|------------------------|------------------------------|---------------------------|
| (1) Blisters | (4) Crushed Insulation | (7) Dislodged/Missing Pieces | (11) Scrape Marks |
| (2) Buckling | (5) Debris on Floor | (8) Gouges | (12) Stains/Discoloration |
| (3) Crumbling | (6) Delamination | (9) Punctures | (13) Torn/Dislodged |
| | | (10) Ripped/Missing Jackets | (14) Water Damage |

6. Disturbance Potential:

(A) Potential For Contact:

- (1) Very Likely _____
(2) Accidental Contact Possible _____
(3) Small Disturbance Likely X
(4) Large Disturbance Likely _____
(>3 sq. or linear ft.) _____

(B) Possible Contact Factors:

- (1) Near Systems Requiring Repair/Maint. _____
(2) High Traffic Area X
(3) Within Reach of Students and Teachers _____
(4) Other _____

(C) Occupancy:

- (1) Maint. Workers X
(2) Students/Teachers X
(3) Public X
(4) Area Not Normally Entered _____

(1) 1/Day Approx. Hours _____
(2) 1/Wk. Approx. Hours _____
(3) 1/Mo. Approx. Hours _____

(D) Influence of Vibration:

- (0) None X
(1) Low _____
(2) Moderate _____
(3) High _____

(E) Source of Vibration:

- (1) Athletic Events _____
(2) Mechanical Equipment _____
(3) Sound Waves _____
(4) Other X

(F) Potential For Air Erosion:

- (0) None _____
(1) Low _____
(2) Moderate _____
(3) High _____

(G) Source of Air Erosion:

- (1) Air Plenum _____
(2) Air Shaft _____
(3) Elevator Shaft _____
(4) Other _____

(H) Preventative Measures:

- (1) Restrict Access _____
(2) Other _____

7. Removal of ACM Mandatory (Repair Not Possible):

(Do not check above without giving reason below.)

Reason For Recommending Removal:

(A) Remodeling/Renovation Planned _____

(B) Demolition Planned _____

Comments: _____

Elmer Castro

(Print Name)

[Signature]

(Signature)

3/15/10

(Date)

ASSESSMENT SHEET

Functional Space Number _____
Homogenous Area Letter _____

Sample Number N/A
School Number _____
Building Number F

Functional Space Description CLASSCS
School Name Webster ES
Building Name F

1. Friable Material: 2'x4' fissured ceiling panel

2. Non-friable Material: _____

3. Damage Rating:

- (A) No Damage: T
(B) Moderate Damage _____
(1) <= 10% Distributed _____
(2) <= 25% Localized _____
(C) Significant Damage: _____
(1) >10% Distributed _____
(2) >25% Localized _____

4. Type of Damage

- (1) Deterioration _____
(2) Water Damage _____
(3) Air Erosion _____
(4) Vandalism _____
(5) Other _____

5. Description of Damage:

- | | | | |
|---------------|------------------------|------------------------------|---------------------------|
| (1) Blisters | (4) Crushed Insulation | (7) Dislodged/Missing Pieces | (11) Scrape Marks |
| (2) Buckling | (5) Debris on Floor | (8) Gouges | (12) Stains/Discoloration |
| (3) Crumbling | (6) Delamination | (9) Punctures | (13) Torn/Dislodged |
| | | (10) Ripped/Missing Jackets | (14) Water Damage |

6. Disturbance Potential:

(A) Potential For Contact:

- (1) Very Likely _____
(2) Accidental Contact Possible _____
(3) Small Disturbance Likely T
(4) Large Disturbance Likely _____
(>3 sq. or linear ft.) _____

(B) Possible Contact Factors:

- (1) Near Systems Requiring Repair/Maint. _____
(2) High Traffic Area T
(3) Within Reach of Students and Teachers _____
(4) Other _____

(C) Occupancy:

- (1) Maint. Workers T
(2) Students/Teachers T
(3) Public T
(4) Area Not Normally Entered _____

(1) 1/Day Approx. Hours _____
(2) 1/Wk. Approx. Hours _____
(3) 1/Mo. Approx. Hours _____

(D) Influence of Vibration:

- (0) None T
(1) Low _____
(2) Moderate _____
(3) High _____

(E) Source of Vibration:

- (1) Athletic Events _____
(2) Mechanical Equipment _____
(3) Sound Waves _____
(4) Other T

(F) Potential For Air Erosion:

- (0) None T
(1) Low _____
(2) Moderate _____
(3) High _____

(G) Source of Air Erosion:

- (1) Air Plenum _____
(2) Air Shaft _____
(3) Elevator Shaft _____
(4) Other _____

(H) Preventative Measures:

- (1) Restrict Access _____
(2) Other _____

7. Removal of ACM Mandatory (Repair Not Possible):

(Do not check above without giving reason below.)

Reason For Recommending Removal: _____

(A) Remodeling/Renovation Planned _____

(B) Demolition Planned _____

Comments: _____

Elmer Castro

(Print Name)

Elmer Castro

(Signature)

3/15/10

(Date)

Appendix F

Site Map

WEBSTER ELEMENTARY SCHOOL CAMPUS
 3602 WINTER CANYON ROAD, MALIBU, CA 90265

AS DESIGNS
 VICTOR SAWCHAK
 1007 1070008 2-28-07
 sampling Loc.

7931
 Staff Parking

7932

7934

7935

7932

KINDERGARTEN PLAYGROUND

LAWN

Boiler Room	11	Ms. Hernandez Kindergarten	12	Ms. Rubin Kindergarten
-------------	----	-------------------------------	----	---------------------------

Ms. Niemi School Nurse	Teacher's Wk. Room
Ms. Meline Administration	Mr. Cott Principal

Library/PTA Office	Computer Lab
Ms. Monte Library	Ms. Harris 2nd Grade

Klin	Textbook Stockroom	Boiler Room
MEN WOMEN	AUDITORIUM CAFETERIA	
Ms. Carlson Sp & Lang	Kitchen	
Teacher's Lunchroom		

LAWN

PATIO

Butterfly Garden	17	Ms. Stevens 5th Grade	18	Science Lab Ms. Abraham	19	Ms. Cook 4th/5th Grade	20	Ms. Maccani 3rd Grade
---------------------	----	--------------------------	----	----------------------------	----	---------------------------	----	--------------------------

BOYS	13	Ms. Stewart 3rd Grade	14	Ms. Nix 2nd Grade	15	Mr. Brownstein 2nd Grade	16	Ms. Charnow 4th Grade	16a	Ms. R. Held Resource
GIRLS										

BOYS	8	Ms. Hines Art Studio	9	Ms. Ross Ms. Murodoch 1st Grade	10	Ms. Berman K/1st Grade
GIRLS						

COMMUNITY
GARDEN

BOYS	1	Ms. Cronrod Kindergarten	2	Ms. Zatliff 1st Grade	3	Ms. McClure 5th Grade	4	Ms. Morris 2nd Grade
GIRLS								

POET'S PARK

UPPER PLAYGROUND

24	Child Care
----	------------

LOWER PLAYGROUND

Appendix G

Coffey Environments Employee Certifications

State of California
Division of Occupational Safety and Health
Certified Site Surveillance Technician

Elmer I Castro



Certification No. 08-4406

Expires on 09/18/10

This certification was issued by the Division of Occupational Safety and Health as authorized by Sections 7100 et seq. of the Business and Professions Code.

State of California
Division of Occupational Safety and Health
Certified Asbestos Consultant

Cesar Ruvalcaba

Name



Certification No. 95-1799

Expires on 10/27/10

This certification was issued by the Division of Occupational Safety and Health as authorized by Sections 7160 et seq. of the Business and Professions Code.